

Exhaust Hose NTP

Thermoplastic hose

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.



- For most normal applications.
- Temperature range:
Continuous use: up to +150 °C.
- Light weight and abrasion resistant.

Product name	Exhaust Hose NTP
Type of hose	NTP
























Exhaust Hose NTP

Description	Diameter, hose (mm)	Hose length (m)	Weight (kg)	Model
Hose exhaust ø 100 /7,5 NTP	100	7,5	0,8 kg/m	20805262
Hose exhaust ø 100/10,0 NTP	100	10	0,8 kg/m	20805362
Hose exhaust 125/7,5 NTP	125	7,5	0,98 kg/m	20805562
Hose exhaust ø 150/5,0 NTP	150	5	1,16 kg/m	20805662
Hose exhaust ø 150/7,5 NTP	150	7,5	1,16 kg/m	20805762
Hose exhaust 75/5,0 NTP	75	5	0,61 kg/m	20805062
Hose exhaust ø 100/5,0 NTP	100	5	0,8 kg/m	20805162
Hose exhaust 125/5,0 NTP	125	5	0,98 kg/m	20805462

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
NTP	Theromplastic polyester fabric coated with EPDM/PP. Bending radius 244mm.	up to 150				

Exhaust Hose NTP


	Accessory	Part No
	Hose suspension, hard plastic Ø75 mm	20373615
	Hose suspension, hard plastic Ø100 mm	20373607
	Hose suspension, hard plastic Ø150 mm	20373609
	Hose suspension, hard plastic Ø125 mm	20373608
	Quick coupler 100mm (2 pcs)	20374641
	Connection kit 4" for quick coupler	20375048
	Quick coupler, male, Ø100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, Ø150 incl. rubber sleeves and hose clip	20376017
	Rubber sleeve, hose clamp 3"NTP,2pc	20376474
	Rubber sleeve, hose clamp 4"NTP,2pc	20376475
	Rubber sleeve, hose clamp 5" NTP 2pc	20376382
	Rubber sleeve, hose clamp 6"NTP,2pc	20376476
	Y-pipe Ø100/100/100	20376647
	Hose coupling 100 (4")	20947410
	Hose coupling 125 (5")	20948710
	Hose coupling 150 (6")	20948810
	Hose clip with rubber sleeve, pair Ø200	20373838
	Reduction 200mm-150mm	20374284
	Quick coupling D=100 (4") male	20947710
	Quick coupling D=100 (4") female	20948110
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910

Exhaust Hose NTP

Accessory		Part No
	Connection set 3"	20373286
	Connection set 4"	20373287
	Connection set 5"	20373288
	Connection set 6"	20373289
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	Hose suspension, adjustable rubber Ø100 - 150 mm	20374530
	Adaptor for 3" hose	20373128
	Quick safety coupler incl. rubber sleeves and hose clips, Ø100	20374541*
	Quick safety coupler incl. rubber sleeves and hose clips, Ø150	20374543*
	Connector 6"-5". steel.	20344353
	Connector 5"-4". steel.	20344354
	Connector 4"-3". steel.	20342483
	Junction pipe d=160	20371413
	Safety coupling ø100 (4")	20373797
	Safety coupling ø150 (6")	20373798

**Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.*

Exhaust Hose NTP

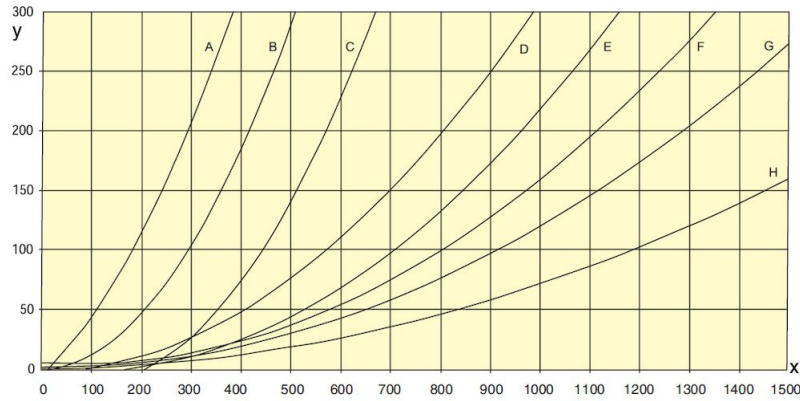

Y = Pressure drop Pa/m

X = Airflow m³/h

A= Ø75 mm (3") on reel

B= Ø75 mm (3") straight

C= Ø100 mm (4") on reel

D=Ø125 mm (5") on reel

E= Ø100 mm (4") straight

F= Ø150 mm (6") on reel

G= Ø125 mm (5") straight

H= Ø150 mm (6") straight