

Eksosslange NTP

Termoplastslange

Spesifikt utviklet for å være fleksibel og formbar, og ha svært lavt trykkfall. De er motstandsdyktige overfor alle kjemikaliene i eksosen fra diesel- og bensinmotorer, og viser høy tålighet mot mekanisk stress.



- For de fleste normale bruksområder.
- Temperaturområde:
Kontinuerlig bruk: opptil +150 °C.
- Lettvekt og robust

Produktnavn	Eksosslange NTP
Slangetype	NTP



Eksosslange NTP

Navn på datablad	Slangediamenter (mm)	Slangelengde (m)	Vekt (kg)	Model
Eksosslange ø 100 /7,5 NTP	100	7,5	0,8 kg/m	20805262
Eksosslange ø 100/10,0 NTP	100	10	0,8 kg/m	20805362
Eksosslange 125/7,5 NTP	125	7,5	0,98 kg/m	20805562
Eksosslange ø 150/5,0 NTP	150	5	1,16 kg/m	20805662
Eksosslange ø 150/7,5 NTP	150	7,5	1,16 kg/m	20805762
Eksosslange 75/5,0 NTP	75	5	0,61 kg/m	20805062
Eksosslange ø 100/5,0 NTP	100	5	0,8 kg/m	20805162
Eksosslange 125/5,0 NTP	125	5	0,98 kg/m	20805462

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpsslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpsslange
NTP	Termoplastisk stoff, belagt med EPDM/PP. Plastspiral og ytre lag i EPDM. Maks innvendig bøyeradius 244mm.	up to 150				

Eksosslange NTP


	Tilbehør	Artikkelnummer
	Hose suspension, hard plastic Ø75 mm	20373615
	Hose suspension, hard plastic Ø100 mm	20373607
	Hose suspension, hard plastic Ø150 mm	20373609
	Hose suspension, hard plastic Ø125 mm	20373608
	Hurtigkobling 100 mm (2 stk.)	20374641
	Tilkoblingssett 4" for hurtigkobling	20375048
	Quick coupler, male, Ø100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, Ø150 incl. rubber sleeves and hose clip	20376017
	Gummiforing, slangeklemme 3"NTP, 2-pk	20376474
	Gummiforing, slangeklemme 4"NTP, 2-pk	20376475
	Gummiforing, slangeklemme 5" NTP 2-pk	20376382
	Gummiforing, slangeklemme 6"NTP, 2-pk	20376476
	Y-rør Ø100/100/100	20376647
	Slangekobling 100 (4")	20947410
	Slangekobling 125 (5")	20948710
	Slangekobling 150 (6")	20948810
	Hose clip with rubber sleeve, pair Ø200	20373838
	Reduksjon 200 mm-150 mm	20374284
	Hurtigkobling D=100 (4") hann	20947710
	Hurtigkobling D=100 (4") hunn	20948110
	Hurtigkobling D=150 (6") hunn	20948310
	Hurtigkobling D=150 (6") hann	20947910

Eksosslange NTP

	Tilbehør	Artikkelnummer
	Tilkobling sett 3"	20373286
	Tilkobling sett 4"	20373287
	Tilkobling sett 5"	20373288
	Tilkobling sett 6"	20373289
	Bøy 4".	20344591
	Bøy 5".	20344592
	Bøy 6".	20344593
	Hose suspension, adjustable rubber Ø100 - 150 mm	20374530
	Adapter for 3"-slange	20373128
	Quick safety coupler incl. rubber sleeves and hose clips, Ø100	20374541*
	Quick safety coupler incl. rubber sleeves and hose clips, Ø150	20374543*
	Kobling 6"-5". stål.	20344353
	Kobling 5"-4". stål.	20344354
	Kobling 4"-3". stål.	20342483
	Koblingsrør d=160	20371413
	Sikkerhetskobling ø100 (4")	20373797
	Sikkerhetskobling ø150 (6")	20373798

**Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.*

Eksosslange NTP

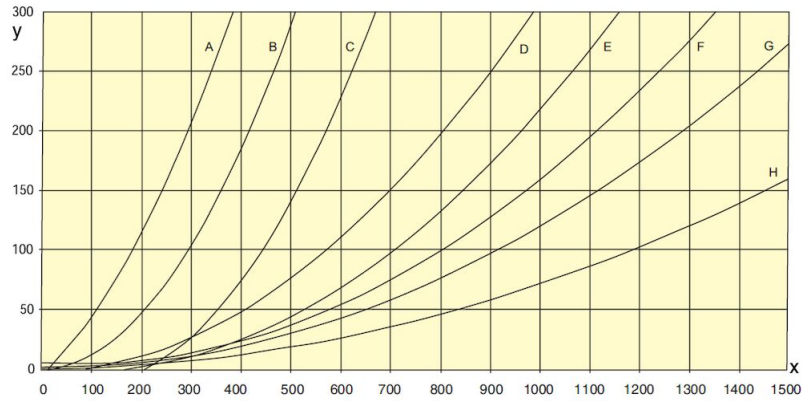

Y = Pressure drop Pa/m

X = Airflow m³/h

A= Ø75 mm (3") on reel

B= Ø75 mm (3") straight

C= Ø100 mm (4") on reel

D= Ø125 mm (5") on reel

E= Ø100 mm (4") straight

F= Ø150 mm (6") on reel

G= Ø125 mm (5") straight

H= Ø150 mm (6") straight