

## Eksosslange NR-CP

Knusesikret gummislange

---

Spesifikt utviklet for å være fleksibel og formbar, og ha svært lavt trykkfall. De er motstandsdyktige overfor alle kjemikaliene i eksosen fra diesel- og bensinmotorer, og viser høy tålighet mot mekanisk stress.


















- For mer robust og intensiv bruk
- Temperaturområde:  
Kontinuerlig bruk: +150 °C.  
Kortvarig bruk: +170 °C.
- Flexible minimal bending radius








Produktnavn	Eksosslange NR-CP
Slangetype	NR-CP
Avklaring av teknisk informasjon	



## Eksosslange NR-CP


Bilde	Slangediamenter (mm)	Slangelengde (m)	Vekt (kg)	Model
	100	5	1,15 kg/m	20807962
	100	10	1,15 kg/m	20808162
	125	5	1,3 kg/m	20808362
	150	10	1,50 kg/m	20808962
	150	5	1,50 kg/m	20808762
	75	2,5	0,83 kg/m	20820162
	75	5	0,83 kg/m	20820262
	100	2,5	1,15 kg/m	20820362
	100	5	1,15 kg/m	20820462
	100	7,5	1,15 kg/m	20820562
	100	7,5	1,15 kg/m	20808062
	100	10	1,15 kg/m	20820662
	125	2,5	1,30 kg/m	20820762
	125	5	1,30 kg/m	20820862
	125	7,5	1,30 kg/m	20820962

## Eksosslange NR-CP

Bilde	Slangediamenter (mm)	Slangelengde (m)	Vekt (kg)	Model
	125	10	1,30 kg/m	20821062
	150	2,5	1,50 kg/m	20821162
	150	5	1,50 kg/m	20821262
	150	7,5	1,50 kg/m	20821362
	150	10	1,50 kg/m	20821462
	200	5	1,90 kg/m	20810762
	200	10	1,90 kg/m	20823962

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpslange
NRCP	Stoff i polyester, belagt med EPDM/PP. Polyester spiral belagt med EPDM. Maks innvendig bøyeradius 225mm.	-40 to +150 Deg. C (Intermittent +170 Deg. C)				

## Eksosslange NR-CP


Tilbehør		Artikkelnummer
	Hose clip with rubber sleeve, pair Ø75	20342489
	Hose suspension, hard plastic Ø75 mm	20373615
	Hose suspension, hard plastic Ø100 mm	20373607
	Hose suspension, hard plastic Ø150 mm	20373609
	Hose suspension, hard plastic Ø125 mm	20373608
	Hose clip with rubber sleeve, pair Ø150	20331552
	Hose clip with rubber sleeve, pair Ø100	20342490
	Hose clip with rubber sleeve, pair Ø125	20342712
	Hose clip with rubber sleeve, pair Ø200	20373838
	Hurtigkobling 100 mm (2 stk.)	20374641
	Tilkoblingssett 4" for hurtigkobling	20375048
	Quick coupler, male, Ø100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, Ø150 incl. rubber sleeves and hose clip	20376017
	Y-rør Ø100/100/100	20376647
	Slangekobling 100 (4")	20947410
	Slangekobling 125 (5")	20948710
	Slangekobling 150 (6")	20948810
	Slangekobling 200 (8")	20948910
	Y-adapter 3x4" Nr-cp-slange	20374276
	Reduksjon 200 mm-150 mm	20374284
	Hurtigkobling D=100 (4") hann	20947710
	Hurtigkobling D=100 (4") hunn	20948110

## Eksosslange NR-CP

	Tilbehør	Artikkelnummer
	Hurtigkobling D=150 (6") hunn	20948310
	Hurtigkobling D=150 (6") hann	20947910
	Tilkobling sett 3"	20373286
	Tilkobling sett 4"	20373287
	Tilkobling sett 5"	20373288
	Tilkobling sett 6"	20373289
	Tilkobling sett 8"	20373290
	Bøy 4".	20344591
	Bøy 5".	20344592
	Bøy 6".	20344593
	Quick safety coupler incl. rubber sleeves and hose clips, Ø100	20374541*
	Quick safety coupler incl. rubber sleeves and hose clips, Ø150	20374543*
	Kobling 6"-5". stål.	20344353
	Kobling 5"-4". stål.	20344354
	Kobling 4"-3". stål.	20342483
	Hose suspension, adjustable rubber Ø100 - 150 mm	20374530
	Koblingsrør d=160	20371413

\*Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.

## Eksosslange NR-CP

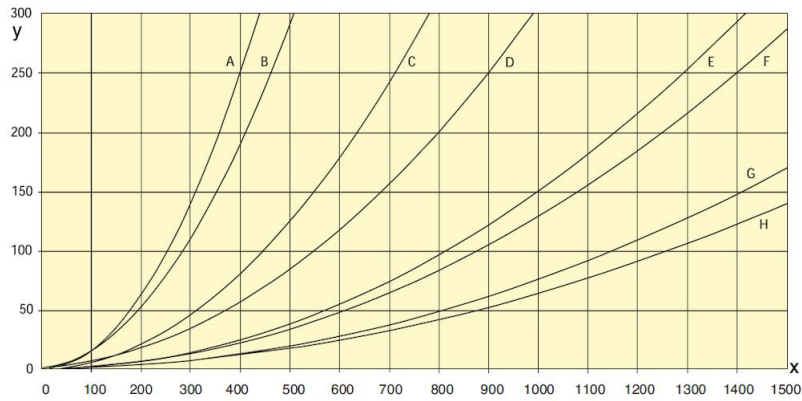

Y = Pressure drop Pa/m

X = Airflow m³/h

A= Ø75 mm (3") on reel

B= Ø75 mm (3") straight

D= Ø100 mm (4") straight

C= Ø100 mm (4") on reel

E= Ø125 mm (5") on reel

F= Ø125 mm (5") straight

G= Ø150 mm (6") on reel

H= Ø150 mm (6") straight