

## Uitlaatgaslang NR-CP

Overrijdbare rubberen uitlaatgaslang

---

De Nederman uitlaatgaslangen zijn specifiek ontworpen om soepel te zijn en om een lage drukval te handhaven. Ze zijn bestand tegen alle agressieve elementen aanwezig in de uitlaatgassen van diesel en benzine en hebben een hoge mechanische weerstand.


















- Voor robuust en intensief gebruik
- Temperatuurbereik: Continu gebruik tot +150 °C. Kortstondig gebruik +170 °C.
- Flexible minimal bending radius








Product naam	Uitlaatgaslang NR-CP
Slangtype	NR-CP
Toelichting van technische gegevens	



## Uitlaatgaslang NR-CP

Afbeelding	Slangdiameter (m)	Slanglengte (m)	Gewicht (kg)	Model
	100	5	1,15 kg/m	20807962
	100	10	1,15 kg/m	20808162
	125	5	1,3 kg/m	20808362
	150	10	1,50 kg/m	20808962
	150	5	1,50 kg/m	20808762
	75	2,5	0,83 kg/m	20820162
	75	5	0,83 kg/m	20820262
	100	2,5	1,15 kg/m	20820362
	100	5	1,15 kg/m	20820462
	100	7,5	1,15 kg/m	20820562
	100	7,5	1,15 kg/m	20808062
	100	10	1,15 kg/m	20820662
	125	2,5	1,30 kg/m	20820762
	125	5	1,30 kg/m	20820862
	125	7,5	1,30 kg/m	20820962

## Uitlaatgaslang NR-CP

Afbeelding	Slangdiameter (m)	Slanglengte (m)	Gewicht (kg)	Model
	125	10	1,30 kg/m	20821062
	150	2,5	1,50 kg/m	20821162
	150	5	1,50 kg/m	20821262
	150	7,5	1,50 kg/m	20821362
	150	10	1,50 kg/m	20821462
	200	5	1,90 kg/m	20810762
	200	10	1,90 kg/m	20823962

Slang type	Specificaties	Temperatuurbereik, °C	Slangkoppelingen einde werkslang	Slangkoppelingen einde koppelslang	Slangaansluiting op de haspel, werkslang	Slangaansluiting op de haspel, koppelslang
NRCP	Polyester materiaal, EPDM/PP gecoat. Spiraal in polyester met EPDM afdekking. Maximale buigradius 225 mm (binnenin)	-40 to +150 Deg. C (Intermittent +170 Deg. C)				

## Uitlaatgaslang NR-CP


Toebehoren		Artikelnummer
	Hose clip with rubber sleeve, pair Ø75	20342489
	Hose suspension, hard plastic Ø75 mm	20373615
	Hose suspension, hard plastic Ø100 mm	20373607
	Hose suspension, hard plastic Ø150 mm	20373609
	Hose suspension, hard plastic Ø125 mm	20373608
	Hose clip with rubber sleeve, pair Ø150	20331552
	Hose clip with rubber sleeve, pair Ø100	20342490
	Hose clip with rubber sleeve, pair Ø125	20342712
	Hose clip with rubber sleeve, pair Ø200	20373838
	Quick coupler 100mm (2 pcs)	20374641
	Connection kit 4" for quick coupler	20375048
	Quick coupler, male, Ø100 incl. rubber sleeves and hose clip	20375049*
	Quick coupler, male, Ø150 incl. rubber sleeves and hose clip	20376017
	Y-pipe Ø100/100/100	20376647
	Slangkoppeling 100 mm (4")	20947410
	Slangkoppeling 125 mm (5")	20948710
	Slangkoppeling 150 mm (6")	20948810
	Slangkoppeling 200 mm (8")	20948910
	Y adapter 3x4" Nrcp hose	20374276
	Reduction 200mm-150mm	20374284
	Quick coupling D=100 (4") male	20947710
	Quick coupling D=100 (4") female	20948110

## Uitlaatgaslang NR-CP

Toebehoren		Artikelnummer
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Connection set 3"	20373286
	Connection set 4"	20373287
	Connection set 5"	20373288
	Connection set 6"	20373289
	Connection set 8"	20373290
	Bend 4".	20344591
	Bend 5".	20344592
	Bend 6".	20344593
	Quick safety coupler incl. rubber sleeves and hose clips, Ø100	20374541*
	Quick safety coupler incl. rubber sleeves and hose clips, Ø150	20374543*
	Connector 6"-5". steel.	20344353
	Connector 5"-4". steel.	20344354
	Connector 4"-3". steel.	20342483
	Hose suspension, adjustable rubber Ø100 - 150 mm	20374530
	Junction pipe d=160	20371413

*\*Use the key ring on the one end of the coupling to more easily connect and reconnect the two hose ends or to disconnect the two hose ends.*

## Uitlaatgaslang NR-CP

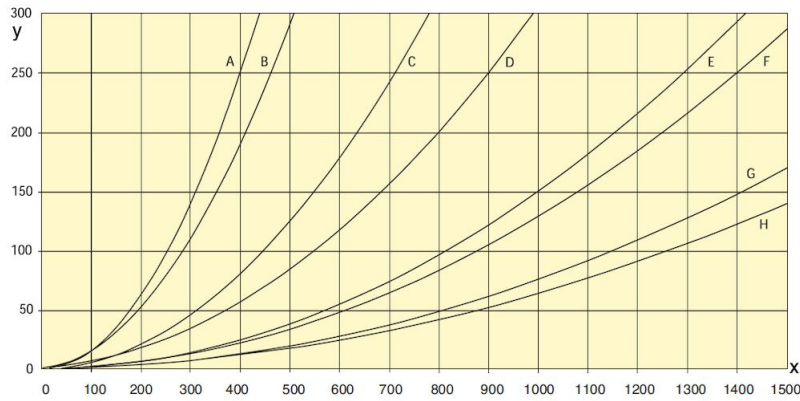

Y = Pressure drop Pa/m

X = Airflow m<sup>3</sup>/h

A= Ø75 mm (3") on reel

B= Ø75 mm (3") straight

D= Ø100 mm (4") straight

C= Ø100 mm (4") on reel

E= Ø125 mm (5") on reel

F= Ø125 mm (5") straight

G= Ø150 mm (6") on reel

H= Ø150 mm (6") straight