

Extreme high temperature hose



Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

• Asbestos- and silicon-free high-temperature fabric.

• Temperature range: Continuous use: +650 °C. Short-term use: +750 °C.

Product name

Exhaust Hose NFC-6.5






[model]
89160045
89160038
89160039
89160040
89160041
89160042
89160043



[accessory]	[partno]
Hose coupling 150 (6")	20948810
Hose coupling 200 (8")	20948910
Reduction 200mm (8 in)-150mm (6 in)	20374284
Quick coupling D=150 (6") female	20948310
Quick coupling D=150 (6") male	20947910
Bend 6".	20344593
Hose clip with rubber sleeve, pair Ø200	20373838
Hose suspension, hard plastic Ø150 mm	20373609
Connector 6"-5". steel.	20344353
Junction pipe d=160 (6.25 in)	20371413
Sin Clip Grip/Bridge Hose Clamp	87000932
6in Clip Grip/Bridge Hose Clamp	87000835
Safety coupling ø100 (4")	20373797
Hose suspension, hard plastic Ø125 mm	20373608
Hose suspension, hard plastic Ø100 mm	20373607
Safety coupling ø150 (6")	20373798



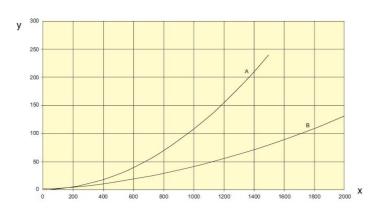

Y = Pressure drop Pa/m

X = Airflow m3/h

A= Ø150 mm (8") straight

B= Ø200 mm (8") straight