

Exhaust Hose NFC-6.5

Extreme high temperature hose



Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

- Asbestos- and silicon-free high-temperature fabric.
- Temperature range:
Continuous use: +650 °C.
Short-term use: +750 °C.

Product name	Exhaust Hose NFC-6.5
Type of hose	NFC-6,5




Exhaust Hose NFC-6.5

Diameter, hose (in)	Hose length (ft)	Model
6	21	20824462
6	21	20824562
8	8	20824662
8	8	20824762
		89160045
		89160038
		89160039
		89160040
		89160041
		89160042
		89160043

Exhaust Hose NFC-6.5

	Accessory	Part No
	Rubber sleeve, hose clamp 6"NTP,2pc	20376476
	Hose coupling 150 (6")	20948810
	Hose coupling 200 (8")	20948910
	Reduction 200mm (8 in)-150mm (6 in)	20374284
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Bend 6".	20344593
	Hose clip with rubber sleeve, pair Ø200	20373838
	Hose suspension, hard plastic Ø150 mm	20373609
	Connector 6"-5". steel.	20344353
	Junction pipe d=160 (6.25 in)	20371413
	5in Clip Grip/Bridge Hose Clamp	87000932
	6in Clip Grip/Bridge Hose Clamp	87000835
	Safety coupling ø100 (4")	20373797
	Hose suspension, hard plastic Ø125 mm	20373608
	Hose suspension, hard plastic Ø100 mm	20373607
	Safety coupling ø150 (6")	20373798

Exhaust Hose NFC-6.5

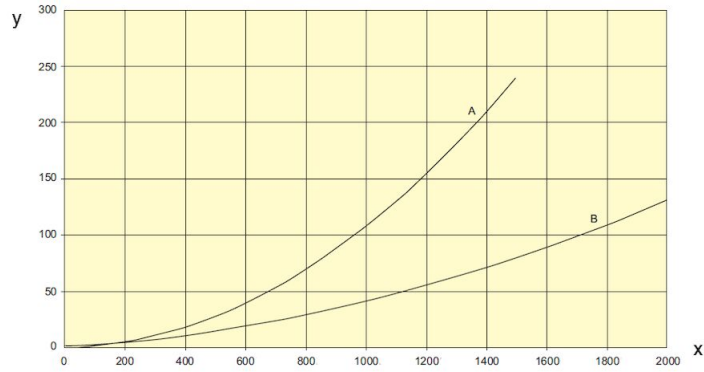

Y = Pressure drop Pa/m

X = Airflow m³/h

A= Ø150 mm (8") straight

B= Ø200 mm (8") straight