


Hose Reel 876

Welding reel designed for maximum safety in oxygen and acetylene welding applications.

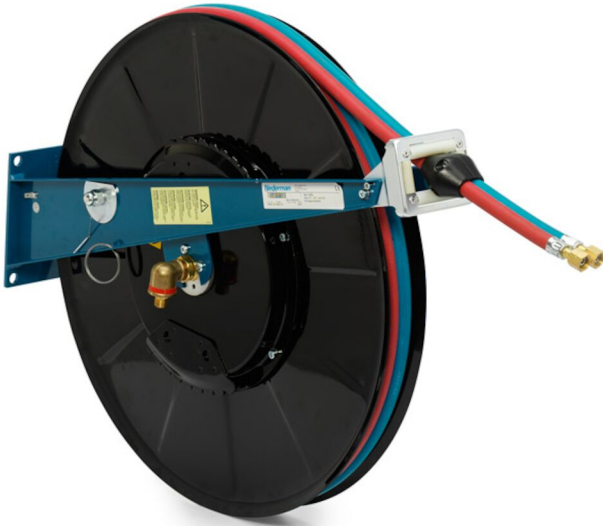


The Hose Reel 876 represents the ultimate solution for oxygen & acetylene or oxygen & LPG welding in terms of safety, durability and easy handling.

- Well ventilated, single layer hose feed and storage - highest safety and easy handling without tangles.
- Open design for easy servicing
- Four-way roller guides prevent hose wear.
- Flexible - Easy to install on wall, floor or ceiling.
- Compliant with EU directives.

Product name	Hose Reel 876
Connection hose length (ft)	3
Type of hose	[K]
Media	[oxygenacetylene]
Distribution hose length (ft)	39
Diameter, connection hose (in)	3/8
Distribution hose diameter (in)	3/8
Weight (lbs)	57 - 66



Hose Reel 876


[image]	Delivered with hose	Max working pressure (psi)	[model]
		203	32827476*
		2	30831676**

*UNF connections

**With UNF-thread

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
K		-20 - 80				

Hose Reel 876

[accessory]		[partno]
	Pivoting bracket.	30372407

Hose Reel 876

