


## Hose Reel 876

Welding reel designed for maximum safety in oxygen and acetylene welding applications.

---



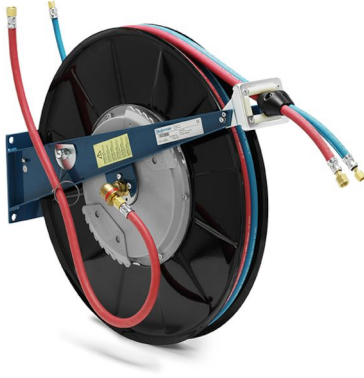





The Hose Reel 876 represents the ultimate solution for oxygen & acetylene or oxygen & LPG welding in terms of safety, durability and easy handling.

- Well ventilated, single layer hose feed and storage - highest safety and easy handling without tangles.
- Open design for easy servicing
- Four-way roller guides prevent hose wear.
- Flexible - Easy to install on wall, floor or ceiling.
- Compliant with EU directives.


Product name	Hose Reel 876
Connection hose length (m)	1
Max working pressure (Mpa)	2
Corrosion resistance	Standard
Electric/Spring driven	Spring



## Hose Reel 876

[Image]	Description	Media	Delivered with hose	Distribution hose length (m)	Diameter, connection hose (mm)	Distribution hose diameter (mm)	[model]
	Hose reel Ser. 876 with 15m 1/4-3/8"			15	1x6,3 mm and 1x10 mm	1x6,3 mm and 1x10 mm	30831076
	Hose reel Ser. 876 with 18m 2x1/4"			18	6,3	6,3	30831176
	Hose reel Ser. 876 with 15m 3/8-3/8"			15	10	10	30831276
	Hose reel Ser. 876 with 15m 3/8-3/8"			15	10	10	30831376
	Hose reel Ser. 876 for 18m 2x1/4"						30831776
	Hose reel Ser. 876 for 15m 1/4-3/8" or 2x3/8"						30831876

## Hose Reel 876

[accessory]		[partno]
	Pivoting bracket.	30372407

## Hose Reel 876

