


## Wentylator FM

Wysoko skuteczny wentylator przeznaczony do filtrów FM

---

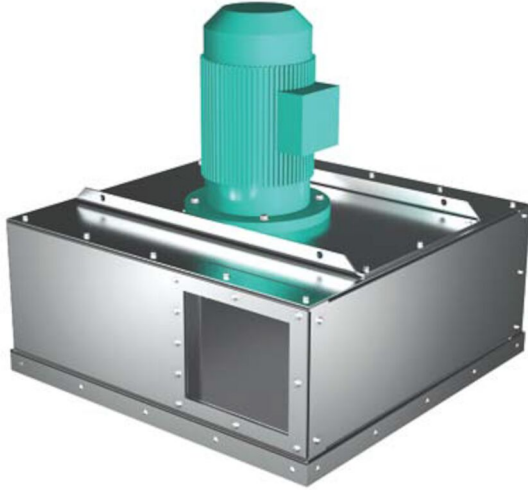

Wentylatory FM przeznaczone są do bezpośredniego montażu w komorze czystego powietrza jednostek filtracyjnych FM. Wentylatory FM cechują się wysoką skutecznością przy niskim poziomie hałasu i nie przeciążają silnika. Rezultatem jest bezpieczny i niezawodny system o minimalnym poborze mocy pod zmniejszonym obciążeniem. Wentylatory są dostępne wyłącznie w wersji RD.













---

Nazwa produktu	Wentylator FM
Instalacja	wewnątrz, na zewnątrz
Materiał	Galv. steel, 2 mm (FM1000 = 4 mm)
Częstotliwość (Hz)	50
Liczba faz	3

# Wentylator FM


Zdjęcie	Nazwa na karcie charakterystyki	Napięcie zasilania (V)	Noise level (dB(A))	Waga (kg)	Moc (kW)	Model
	Fan type FM620 (airflow optimum 2000 m <sup>3</sup> /h, Max 3000 m <sup>3</sup> /h)	230/400	65	74	3	5501498
	Fan type FM622 (airflow optimum 3000 m <sup>3</sup> /h, Max 4000 m <sup>3</sup> /h)	400/690	69	83	4	5501537
	Fan type FM622 (airflow optimum 3000 m <sup>3</sup> /h, Max 4000 m <sup>3</sup> /h)	230/400	69	83	4	5501538
	Fan type FM625 (airflow optimum 4000 m <sup>3</sup> /h, Max 5000 m <sup>3</sup> /h)	230/400	67	95	5,5	5501576
	Fan type FM625 (airflow optimum 4000 m <sup>3</sup> /h, Max 5000 m <sup>3</sup> /h)	400/690	67	95	5,5	5501575
	Fan type FM825 (airflow optimum 5000 m <sup>3</sup> /h, Max 6000 m <sup>3</sup> /h)	400/690	72	150	7,5	5501612
	Fan type FM831 (airflow optimum 7000 m <sup>3</sup> /h, Max 8000 m <sup>3</sup> /h)	400/690	73	166	11	5501659
	Fan type FM831 (airflow optimum 7000 m <sup>3</sup> /h, Max 8000 m <sup>3</sup> /h)	230/400	73	166	11	5501660
	Fan type FM835 (airflow optimum 9000 m <sup>3</sup> /h, Max 10000 m <sup>3</sup> /h)	400/690	74	180	15	5501699
	Fan type FM835 (airflow optimum 9000 m <sup>3</sup> /h, Max 10000 m <sup>3</sup> /h)	230/400	74	180	15	5501700
	Fan type FM1000 (airflow optimum 14000 m <sup>3</sup> /h, Max 16000 m <sup>3</sup> /h)	400/690	76	260	18,5	5501741
	Fan type FM1000 (airflow optimum 14000 m <sup>3</sup> /h, Max 16000 m <sup>3</sup> /h)	230/400	76	260	18,5	5501742

## Wentylator FM

Akcesoria		Nr części
	DUAL silencer for FM600 series fan with air grille	5501813
	DUAL silencer for FM6800 series fan with air grille	5501830
	DUAL silencer for FM1000 series fan with air grille	5501854
	DUAL silencer for FM600 series fan with air grille and rain cover	5501814
	DUAL silencer for FM6800 series fan with air grille and rain cover	5501832
	DUAL silencer for FM1000 series fan with air grille and rain cover	5501855
	DUAL silencer for FM600 series fan with flanged outlet for duct connection	5501815
	DUAL silencer for FM6800 series fan with flanged outlet for duct connection	5501833
	DUAL silencer for FM1000 series fan with flanged outlet for duct connection	5501856
	Noise enclosure for FM800 fan	5501783
	Noise enclosure for FM800 fan	5501784
	Noise enclosure for FM1000 fan	5501799

## Wentylator FM

FM fan curve. Static pressure at filter inlet / Airflow volume.  
(Includes all internal resistance except filter media)

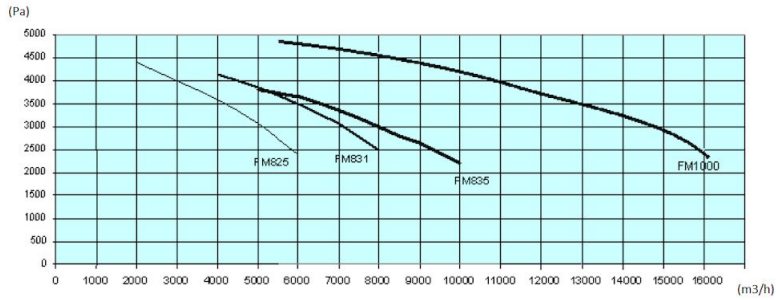

FM fan curve. Static pressure at filter inlet / Airflow volume.  
(Includes all internal resistance except filter media)

