Nederman

NFKZ 3000 baghouse dust collector

Baghouse dust collector with chain conveyor



Example: NFKZ3000 2+1 HJ filter with side and top venting for St2 dust

Baghouse dust collector suitable for handling large volumes of air with heavy material contamination levels.

The NFKZ3000 baghouse dust collector with chain conveyor is suitable for handling large volumes of air with heavy material contamination levels. It is a modular filter made of galvanised steel sheet. Filter has telescopic support and is suitable for outdoor use.

Each module, 2400 mm (94") of the filter design is fitted with a combined inspection and explosion relief door. Filter cleaning with regeneration fans. The filter is fitted with the unique patented SUPERBAG.

The filter hopper and inlet section (optional) separates mediumsized/large particles and distributes the air to the filter bags. A double chain conveyor on the bottom of the hopper passes the collected material to a rotary valve for discharge.

•Handles air volumes from 6000-500 000 m3/h (3,500-294,000 cfm)

 $\bullet {\sf ATEX}\xspace$ - ATEX-certified for St1 and St2 dust with a Kst value up to 300 bar m/s

- •Compact design
- Suitable for handling large volumes of air with heavy material contamination
- •Designed for continuous operation
- •For mounting on the ground or on the roof
- •Overpressure or vacuum versions up to 5 000 Pa (0.725 psi)
- •Explosion relief upwards or sideways
- Powerful online cleaning with efficient regeneration fans
- •Patented antistatic polyester SUPERBAGs
- •Easy to install on site and extend when required
- •Low energy consumption.

Produktnavn	NFKZ 3000 baghouse dust collector
Installasjon	Utendørs
Materiale	Galvanised steel sheet
Egnet for brennbart støv	True
Rengjøringsmetode, filter	Rensing med reversert luft
Bruksområde	[grit], Støv
Kapasitet (maks. luftstrøm m3/t)	500000
Driftstemperatur	-20 to 75 Deg. C.



rit Stø



NFKZ 3000 baghouse dust collector

Model	
NFKZ3000-HJ	
NFKZ3000-LJ	

Nederman

NFKZ 3000 baghouse dust collector

 A#
 B
 C
 D
 E
 F
 G
 H
 I
 J**
 K**
 L
 M
 N
 O
 P**
 Q
 R
 S
 U
 W


 2400
 1106
 245
 153
 583
 1200
 800
 320
 3420
 320
 See below
 2321
 52
 1260
 136
 101
 150
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470
 470

L – telescopic filter legs		Туре	Weight per	
Туре	Min. Adjust.	Max. Adjust.		module
L = 1596	555	1250	J - over pressure	567 kg
L = 2195	1155	1850	J - vacuum	742 kg
L = 2596	1555	2250	Driving station	250 kg

All dimensions in mm.

** Height of LJ version - reduce 1440 mm

Optional 1200 mm.

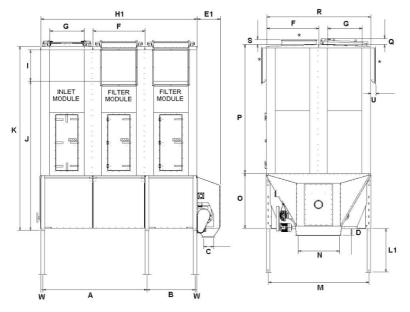

Dimensions (example - NFKZ3000 2+1 HJ)

* Optional position of outlet / reg. fan. 800 x 800 or 600 x 600 mm. (LJ version: not on door side)