

## OMF 1000-2

FibreDrain® oil mist collector for continuous operation.



The Nederman OMF (Oil Mist Filter) is designed to handle large amounts of oil mist during continuous operation. They are engineered for high efficiency filtration coupled with lower maintenance costs.



Nederman OMF 1000-2 has as standard 2 filter-stages where the first stage consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The second stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman OMF units are prepared for use of pre filter. OMF 1000-2 have an in-built radial fan.

- Two (2) filter stages. An optional pre-filter is available.
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two (2) Ø200mm inlet locations, one blanked using clamp ring connection.
- Push button start/stop with integral overload protection.

Product name	OMF 1000-2
Standard	2009/125/EC
Volume (for shipping) (ft³)	76.28
Noise level (dB(A))	69 dB(A) @ 5' from service side
Protection class	IP55
Filter efficiency (%)	99,95
Installation	Indoor
Material	Sheet metal, painted inside and outside.
Filter cleaning method	Self-Draining
Working pressure (in. wg)	10.0" (External)
Capacity (max airflow cfm)	589
Operating Temperature	104° F, internal fan.
No of phases	3
Number of filter elements	2
Colour	NCS-S 1005 B20G
Weight (lbs)	441
Power (Hp)	1.5 HP (1.1 Kw)



## OMF 1000-2

Image	Description	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Model
	OMF 1000-2, Inlet 2 x Ø200 clamp ring left or right. Drain 2 x 1" Female	230/400	50	4,2 / 2,4	12400024*
	OMF 1000-2, Inlet 2 x Ø200 clamp ring left or right. Drain 2 x 1" Female	460	60	4.2	12400961**

\*Plus 1 optional filter element. Incl extension legs

\*\*Plus one (1) optional filter element.

## OMF 1000-2


	Accessory	Part No
	Drain pump box, 50 Hz	12400054*
	Drain container with piping	12400764**
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	HEPA Filter H13; 610x610x292 mm	12400012
	Outlet transition, ø 200 mm, for OSF 1000 / OSF 1000-2 / OMF 1000-2 / OMF 2000	12400904
	Outlet transition, ø 250 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400905
	Outlet transition, ø 315 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400906
	FibreDrain Filter 2 OMF; 600x600x292 mm	12400010
	Drain pump box, 50 Hz, 10 litre/min at 10m, including controller	12401330
	Drain pump box, 60 Hz, 10 litre/min at 5m, excluding controller	12401329***
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 2 kPa pressure sensor, 1,5kW	73008913

\*Drain connection must be elevated min 200 mm from pump box support level

\*\*Drain connection must be elevated min 420mm from container support level

\*\*\*Controller available on request.

## OMF 1000-2

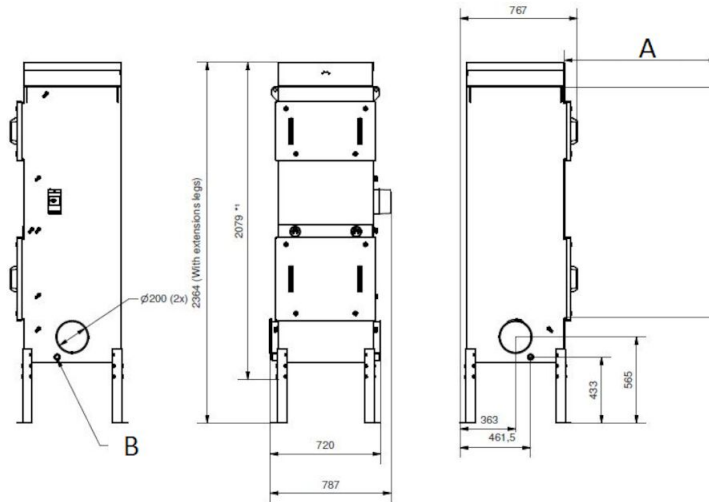

A) 1000 min filler service space

B) Drain stud (x2)