

The best and most cost-efficient solution for applications where small, flexible and easy-to-use arms are required.



Nederman FX2 arms are made of lightweight anodized aluminium sections, with three adjustable, composite friction joints. Offering strength and durability combined with easy handling, they can be used in many types of environment. They are especially suitable for applications where small, flexible and easy-to-use arms are required.

A robust and reliable all-round arm for general applications where there is little risk of electrical discharges or attack by aggressive chemicals.

- Optimal efficiency and low noise provides safe and quiet working environment
- Ceilings, walls and floors or fixed to worktops mountings and cut2fit extension profile gives maximum installation flexibility
- The two outermost arm joints can rotate and swivel through 360°, which gives the unique maneuverability
- The lean, smooth and aesthetic design allows arms to fit in well in any environment without compromising its durability and reliability
- Highly integrated products that save customers' time and costs, as well as providing the reliability and functionality to deliver a better performance

Product name	BenchTop Extraction Arm FX2 75 Original
Noise level (dB(A))	58 dB(A) at 240 m3/h
Installation	[Indoor]
Material	Tubes in anodizied aluminium. Joints in PP plastic. Duct connectors in EPDM rubber. Minihood in PP plastic.
Fume temperature	max 70°C
Extraction arm diameter (mm)	75
Airflow (m³/h)	110-240
Arm length (m)	

 ϵ

16-03-2021




[image]	Description	Weight (kg)	[model]
	FX2-ORIG-D75-L1100-Up-Low	3,2	70602344
	FX2-ORIG-D75-L1100-Up-PLUS	4,5	70602444
	FX2-ORIG-D75-L1100-Down-Low	3,2	70602544
with the same of t	FX2-ORIG-D75-L1100-Down-Through	2,6	70602644
	FX2-ORIG-D75-L1500-Up-Low	3,4	70602744
	FX2-ORIG-D75-L1500-Up-PLUS	4,7	70602844
	FX2-ORIG-D75-L1500-Down-Low	3,4	70602944
· Ji.	FX2-ORIG-D75-L1500-Down-Through	2,8	70603044



	[accessory]	[partno]
	FX-Bracket kit-D50/75/100-L190	70501144
	FFX2-Bracket kit-D50/75/100-L500	70377042
	FX2-Wall BRKT kit-Flat-L190-White	70377043
	FX2-Wall-P BRKT kit-D50/75/100-L190	70377046
	FX2-Bench bracket kit-D50/75/100, Complete mounting kit for mounting FX2 50/75/100 arms on the bench edge.	70501444
0	FX-Classic bracket-D50/75/100. The classic bracket should be used together with Cut2fit extension profile for mounting FX2 50/75/100 arms on the ceiling, wall, floor or on top of other horizontal surface.	70501244
	FX-Cut2fit extension-L1100.	70501344
	FX-Cut2fit extension-L2200	70374600
(10.25)	FX-Ceiling cover plate. Cover false/dropped ceiling openings caused by both extension profile and ducting.	70502644
	FX2-Ceiling cover plate-PLUS	70377045
	FX-Combi hood-ORIGINAL-D50/75/100	70500144
China China	FX-Dome hood-ORIGINAL-D50/75/100	70376982
	FX-Metal hood-ORIG/CHEM-D50/75/100	70500444
	FX-Flange hood-ORIGINAL-D50/75/100. Transparent flange hood, made of PET-G plastic, is designed to maximize the capture zone without hinder objects on the bench or the user. It can be attached directly on minihood, irrespective of arm size.	70502844
	FX2-Al duct-L1000-D75/100toD100. Aluminum duct with 100 mm (4 inch) diameter and 1000 mm (39.37 inch) length is designed to replace vertical ventilation duct above the swivel of FX2 75/100 arm. This is a good looking alternative to standard, ventilation duct.	70377058
	FX2-Al duct-L2000-D75/100toD100. Aluminum duct with 100 mm (4 inch) diameter and 2000 mm (78.74 inch) length is designed to replace vertical ventilation duct above the swivel of FX2 75/100 arm. This is a good looking alternative to standard, ventilation duct.	70377059
6	FX2-Hose support ring-D75	70377067
6	FX2-Hose support ring-D100. Place into the 100 mm (4 inch) hose to support the connection between the hose and the duct connector of the arm. A must to connect the hose to arm.	70377068
	FX2-Duct connector-ORIG/CHEM-D75	70377038



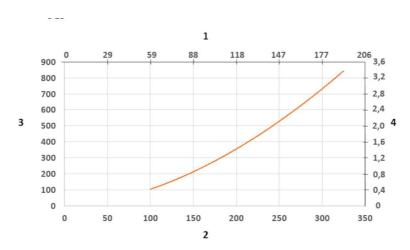


Pressure Drop diagram:

- 1) X- Axis: Air Flow Rate (cfm)
- 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Static Pressure Drop (Pa)4) Y-Axis: Static Pressure Drop (in. wg.)



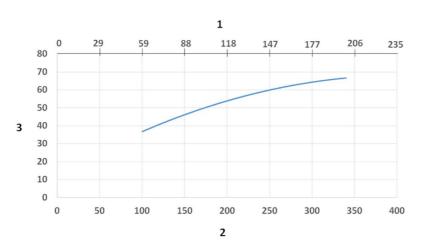


Sound Level diagram:

- 1) X- Axis: Air Flow Rate (cfm)
- 2) X- Axis: Air Flow Rate (m/h)
- 3) Y-Axis: Sound Pressure Level (dB) (A))



BenchTop Extraction Arm FX2 75 Original

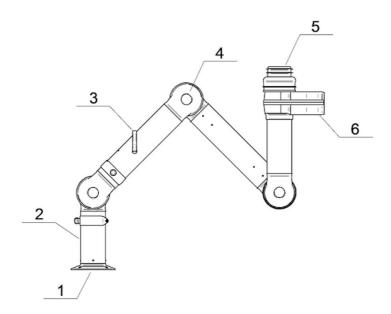

Material:

1) Flange: PP

2) Tubes: Aluminum, anodized 10 μm


 Damper adjustment handle: Aluminum, anodized 10 μm Internal spring: Staineless steel
 Damper blade: Conductive TP & PP plastic

Joints: PP with glass fibre reinforcement
 Plastic rings: PP with glass fibre reinforcement
 Axial locking rings: PP with glass fibre reinforcement
 Adjustment knobs: PA & EDS plastic
 Threaded shaft inside joints: Stainless Steel

5) Duct connector: EPDM Rubber

Swivel: Aluminum, powder coating
 Rivets: Aluminum
 Bearings swivel: PP plastic with glass fibre reinforcement



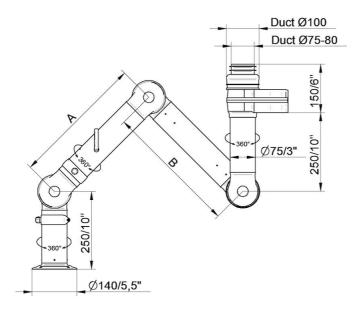


• FX2-ORIG-D75-L1100-Up-Low Part number: 70602344 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 inch) B: 420 mm (16,5 inch)

• FX2-ORIG-D75-L1500-Up-Low Part number: 70602744 Max. working radius: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)



BenchTop Extraction Arm FX2 75 Original

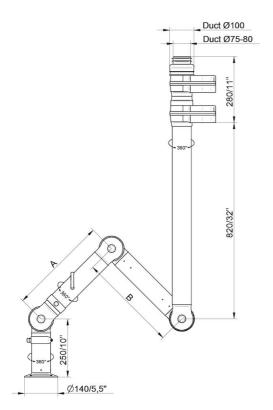


FX2-ORIG-D75-L1100-Up-PLUS Part number: 70602444 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-ORIG-D75-L1500-Up-PLUS
Part number: 70602844
Max. working radius: 1450 mm (57,1 in)
A: 500 mm (19,7 in)
B: 700 mm (27,5 in)



BenchTop Extraction Arm FX2 75 Original

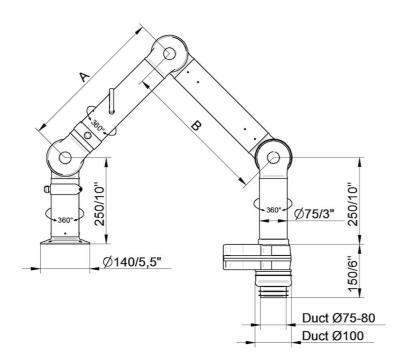

• FX2-ORIG-D75-L1100-Down-Low

Part number: 70602544

Max. working radius: 1090 mm (42,9 in)

A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-ORIG-D75-L1500-Down-Low


Part number: 70602944

Max. working radius: 1450 (57,1 in)

A: 500 mm (19,7 in) B: 700 mm (27,5 in)



BenchTop Extraction Arm FX2 75 Original

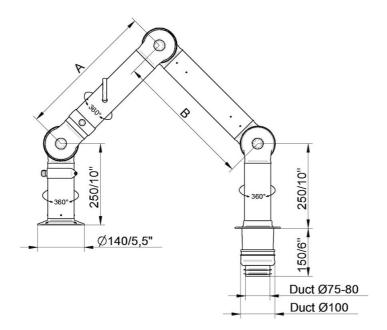


• FX2-ORIG-D75-L1100-Down-Through Part number: 70602644 Max. working radius: 1090 mm (42,9 in) A: 420 mm (16,5 in) B: 420 mm (16,5 in)

• FX2-ORIG-D75-L1500-Down-Through Part number: 70603044 Max. working radius: 1450 mm (57,1 in) A: 500 mm (19,7 in) B: 700 mm (27,5 in)




BenchTop Extraction Arm FX2 75 Original

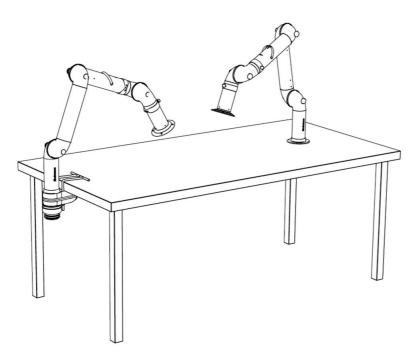

Bench mounting examples: Left: FX2-Down-Low arm with following accessories: -FX2-Bench bracket kit-D-50/75/100

Right: FX2-Down-Through arm



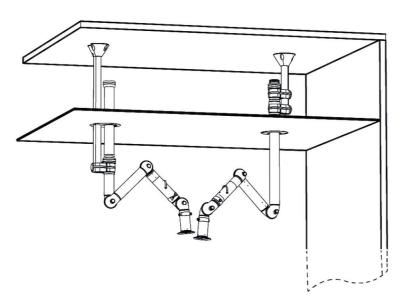

Ceiling mounting example:

Left: FX2-Up-Low arm with following accessories:


- -FX-Classic bracket
- -FX-Cut2fit extension-L1100
- -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D100
- -FX-Ceiling cover plate

Right: FX2-Up-PLUS arm with following accessories:

- -FX2-Bracket kit-D-50/75/100-L500
- -FX2-Ceiling cover plate-PLUS



BenchTop Extraction Arm FX2 75 Original

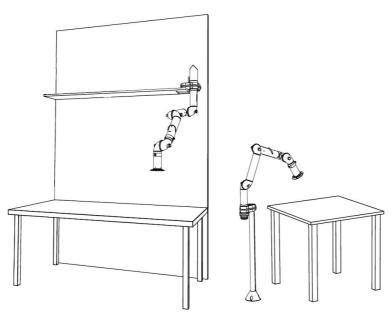

Other mounting examples:

Left: Shelf mounting with FX2-Up-Low arm and following accessories:


-FX2-Rench bracket kir

Right: Floor mounting with FX2-Up-Low arm and following accessories:

- -FX-Classic bracket
- -FX-Cut2fit extension-L1100



BenchTop Extraction Arm FX2 75 Original

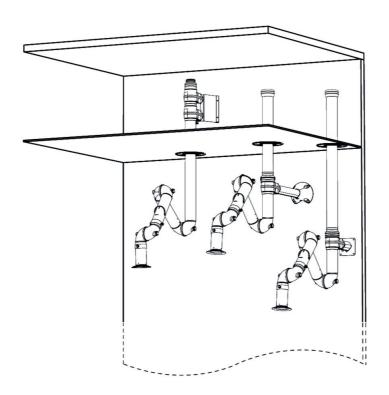

Wall mounting examples:

Left: FX2-Up-PLUS arm with following accessories:

- -FX2-Wall-P BRKT kit-D-50/75/100-L190
- -FX2-Ceiling cover plate-PLUS

Middle: FX2-Up-Low arm with following accessories:

- -FX2-Bracket kit-D-50/75/100-L500
- -FX2-Ceiling cover plate-PLUS
- -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D100

Right: Up-Low arm with following accessories:

- -FX2-Wall BRKT kit-Flat-L190-White
- -FX2-Ceiling cover plate-PLUS
- -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D100