# Nederman

# BenchTop Extraction Arm FX2 100 Original

The best and most cost-efficient solution for applications where small, flexible and easy-to-use arms are required.



Nederman FX2 arms are made of lightweight anodized aluminium sections, with three adjustable, composite friction joints. Offering strength and durability combined with easy handling, they can be used in many types of environment. They are especially suitable for applications where small, flexible and easy-to-use arms are required. A robust and reliable all-round arm for general applications where there is little risk of electrical discharges or attack by aggressive chemicals.

- Optimal efficiency and low noise provides safe and quiet working environment
- Ceilings, walls and floors or fixed to worktops mountings and cut2fit extension profile gives maximum installation flexibility
- The two outermost arm joints can rotate and swivel through 360°, which gives the unique maneuverability
- The lean, smooth and aesthetic design allows arms to fit in well in any environment without compromising its durability and reliability
- Highly integrated products that save customers' time and costs, as well as providing the reliability and functionality to deliver a better performance

Product name	BenchTop Extraction Arm FX2 100 Original
Noise level (dB(A))	62 dB(A) at 265 cfm
Installation	Indoor
Material	Tubes in anodizied aluminium. Joints in PP plastic. Duct connectors in EPDM rubber. Minihood in PP plastic.
Fume temperature	max 70°C
Extraction arm diameter (in)	4 in.
Airflow (CFM)	110 cfm - 265 cfm
Colour	Aluminum and white



Image	Description	Arm length (ft)	Weight (lbs)	Model
~	FX2-ORIG-D100-L1200-Up/Down- Low	1,2	10.5 lbs	70604744*
	FX2-ORIG-D100-L1200-Up-PLUS	1,2	13 lbs	70604844**
· .	FX2-ORIG-D100-L1200-Up/Down- Thr	1,2	9 lbs	70604944***
~~t	FX2-ORIG-D100-L1800-Up-Low	1,8	13 lbs	70605044****
	FX2-ORIG-D100-L1800-Up-PLUS	1,8	17 lbs	70605144**
	FX2-ORIG-D100-L1800-Down-Low	1,8	13 lbs	70605244****
· · · · ·	FX2-ORIG-D100-L1800-Down- Through	1,8	11.5 lbs	70605344*****
N	FX2-ORIG-D100-L2400-Up-Low	2,4	15.2 lbs	70605444****
	FX2-ORIG-D100-L2400-Up-PLUS	2,4	19.2 lbs	70605544**


\*Up/Down-Low \*\*Up-PLUS

\*\*\*Up/Down-Through \*\*\*\*Up-Low \*\*\*\*\*Down-Low \*\*\*\*\*Down-Through



	Accessory	Part No
	FX-Bracket kit-D50/75/100-L190	70501144
	FFX2-Bracket kit-D50/75/100-L500	70377042
	FX2-Wall BRKT kit-Flat-L190-White	70377043
	FX2-Wall-P BRKT kit-D50/75/100-L190	70377046
	FX2-Bench bracket kit-D50/75/100	70501444
0	FX-Classic bracket-D50/75/100	70501244
	FX-Cut2fit extension-L1100.	70501344
	FX-Cut2fit extension-L2200	70374600
	FX-Ceiling cover plate	70502644
	FX2-Ceiling cover plate-PLUS	70377045
- Charles	FX-Combi hood-ORIGINAL-D50/75/100	70500144
( Alexandre	FX-Dome hood-ORIGINAL-D50/75/100	70376982
	FX-Metal hood-ORIG/CHEM-D50/75/100	70500444
and a	FX-Flange hood-ORIGINAL-D50/75/100	70502844
	FX2-Duct connector-ORIG/CHEM-D100	70377040
	FX2-AI duct-L1000-D75/100toD100	70377058
	FX2-AI duct-L2000-D75/100toD100	70377059
	FX-Hose-D100-L3000-Grey	70377099
	FX-Hose D125-L5000-Grey	70377100
9	FX2-Hose support ring-D100	70377068
9	FX2-Hose support ring-D125	70377069




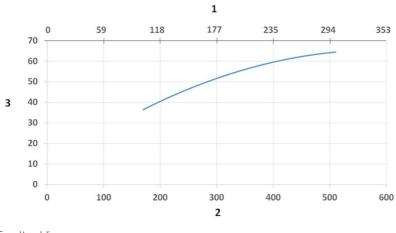

Sound Level diagram: 1) X- Axis: Air Flow Rate (cfm) 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Sound Pressure Level (dB) (A))




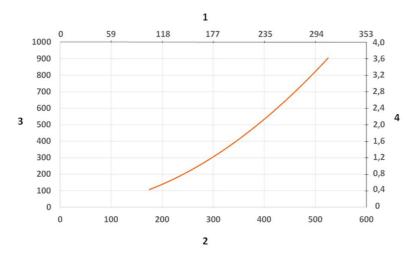

Pressure Drop diagram: 1) X- Axis: Air Flow Rate (cfm) 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Static Pressure Drop (Pa)4) Y-Axis: Static Pressure Drop (in. wg.)



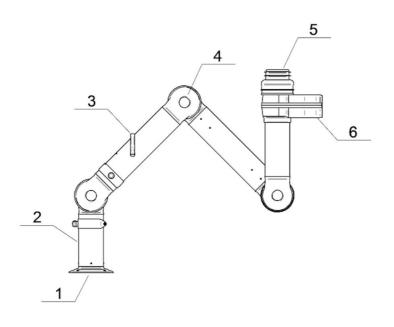

Material: 1) Flange: PP

2) Tubes: Aluminum, anodized 10 µm


3) Damper adjustment handle: Aluminum, anodized 10 µm Internal spring: Staineless steel Damper blade: Conductive TP & PP plastic

4) Joints: PP with glass fibre reinforcement Plastic rings: PP with glass fibre reinforcement Axial locking rings: PP with glass fibre reinforcement Adjustment knobs: PA & EDS plastic Threaded shaft inside joints: Stainless Steel

5) Duct connector: EPDM Rubber

6) Swivel: Aluminum, powder coating Rivets: Aluminum Bearings swivel: PP plastic with glass fibre reinforcement




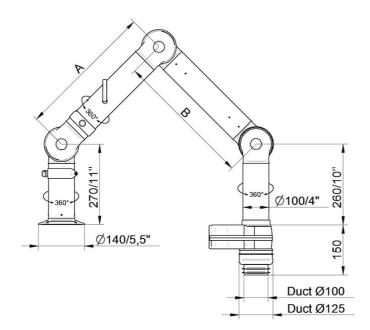

• FX2-ORIG-D100-L1200-Up/Down-Low Part number: 70604744 Max. working radius: 1170 mm (46,1 in) A: 450 mm (17,7 in) B: 450 mm (17,7 in)

• FX2-ORIG-D100-L1800-Down-Low Part number: 70605244 Max. working radius: 1770 mm (69,7 in) A: 750 mm (29,5 in) B: 750 mm (29,5 in)




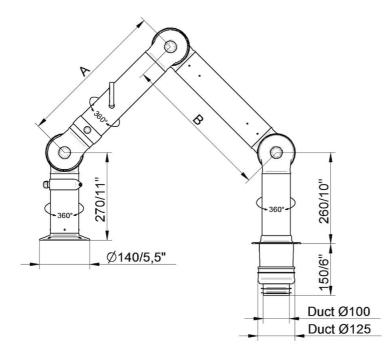

• FX2-ORIG-D100-L1200-Up/Down-Through Part number: 70604944 Max. working radius: 1170 mm (46,1 in) A: 450 mm (17,7 in) B: 450 mm (17,7 in)

• FX2-ORIG-D100-L1800-Down-Through Part number: 70605344 Max. working radius: 1770 mm (69,7 in) A: 750 mm (29,5 in) B: 750 mm (29,5 in)



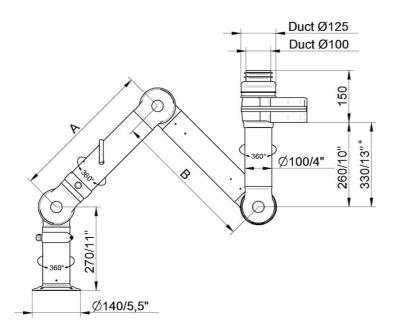


• FX2-ORIG-D100-L1200-Up/Down-Low Part number: 70604744 Max. working radius: 1170 mm (46,1 in) A: 450 mm (17,7 in) B: 450 mm (17,7 in)

• FX2-ORIG-D100-L1800-Up-Low Part number: 70605044 Max. working radius: 1770 mm (69,7 in) A: 750 mm (29,5 in) B: 750 mm (29,5 in)

\*

• FX2-ORIG-D100-L2400-Up-Low Part number: 70605444 Max. working radius: 2290 mm (90,2 in) A: 1010 mm (39,7 in) B: 1010 mm (39,7 in)



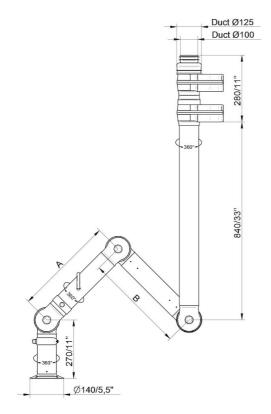


FX2-ORIG-D100-L1200-Up-PLUS Part number: 70604844 Max. working radius: 1170 mm (46,1 in) A: 450 mm (17,7 in) B: 450 mm (17,7 in)

• FX2-ORIG-D100-L1800-Up-PLUS Part number: 70605144 Max. working radius: 1770 mm (69,7 in) A: 750 mm (29,5 in) B: 750 mm (29,5 in)

• FX2-ORIG-D100-L2400-Up-PLUS Part number: 70605544 Max. working radius: 2290 mm (90,2 in) A: 1010 mm (39,7 in) B: 1010 mm (39,7 in)




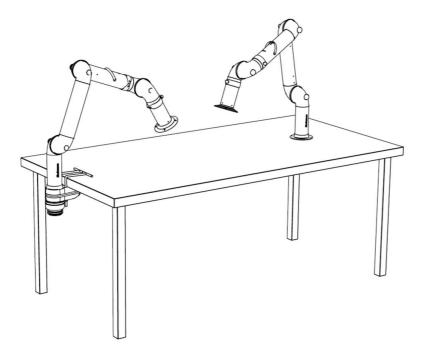

Bench mounting examples: Left: FX2-Down-Low arm with following accessories: -FX2-Bench bracket kit-D-50/75/100

Right: FX2-Down-Through arm




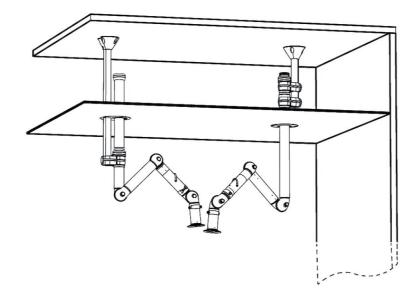

Ceiling mounting example: Left: FX2-Up-Low arm with following accessories: -FX-Classic bracket -FX-Cut2fit extension-L1100 -FX2-Alu duct -FX2-Duct connector-ORIG/CHEM-D100 -FX-Ceiling cover plate

Right: FX2-Up-PLUS arm with following accessories: -FX2-Bracket kit-D-50/75/100-L500 -FX2-Ceiling cover plate-PLUS



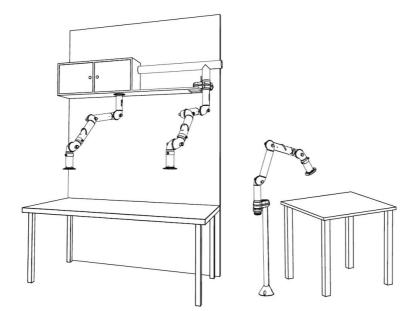

Other mounting examples:


Left: Overbench cabinet mounting with FX2-Up/Down-Through arm

Middle: Shelf mounting with FX2-Up-Low arm and following accessories: -FX2-Bench bracket kit

Right: Floor mounting with FX2-Up-Low arm and following accessories: -FX-Classic bracket

-FX-Cut2fit extension-L1100



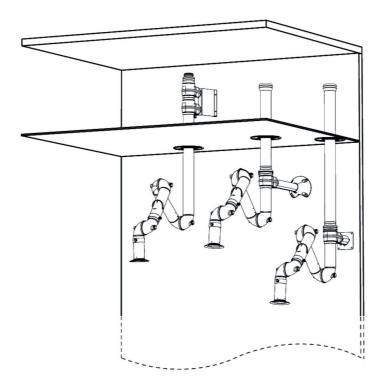

Wall mounting examples: Left: FX2-Up-PLUS arm with following accessories: -FX2-Wall-P BRKT kit-D-50/75/100-L190 -FX2-Ceiling cover plate-PLUS

Middle: FX2-Up-Low arm with following accessories: -FX2-Bracket kit-D-50/75/100-L500 -FX2-Ceiling cover plate-PLUS -FX2-Alu duct -FX2-Duct connector-ORIG/CHEM-D100

Right: FX2-Up-Low arm with following accessories: -FX2-Wall BRKT kit-Flat-L190-White -FX2-Ceiling cover plate-PLUS -FX2-Alu duct -FX2-Duct connector-ORIG/CHEM-D100