

The best and most cost-efficient solution for applications where small, flexible and easy-to-use arms are required.



Nederman FX2 arms are made of lightweight anodized aluminium sections, with two or three adjustable, composite friction joints. Offering strength and durability combined with easy handling, they can be used in many types of environment. They are especially suitable for applications where small, flexible and easy-to-use arms are required.

A robust and reliable all-round arm for general applications where there is little risk of electrical discharges or attack by aggressive chemicals.

- Optimal efficiency and low noise provides safe and quiet working environment
- Ceilings, walls and floors or fixed to worktops mountings and cut2fit extension profile gives maximum installation flexibility
- The two outermost arm joints can rotate and swivel through 360°, which gives the unique maneuverability
- The lean, smooth and aesthetic design allows arms to fit in well in any environment without compromising its durability and reliability
- Highly integrated products that save customers' time and costs, as well as providing the reliability and functionality to deliver a better performance

Product name	BenchTop Extraction Arm FX2 50 Original
Noise level (dB(A))	60 dB(A) at 65 cfm
Installation	[Indoor]
Material	Tubes in anodizied aluminium. Joints in PP plastic. Duct connectors in EPDM rubber. Minihood in PP plastic.
Fume temperature	max 70°C
Extraction arm diameter (in)	2 in.
Airflow (CFM)	30 cfm - 65 cfm
Colour	Aluminum and white






[image]	Description	Arm length (ft)	Weight (lbs)	[model]
	FXZ-ORIG-D50-L700-Up/Down- Low	0,7	3.7 lbs	70600144*
	FX2-ORIG-D50-L700-Up-PLUS	0,7	2,7	70600244**
	FX2-ORIG-D50-L700-Up/Down- Through	0,7	2.6 lbs	70600344*
	FX2-ORIG-D50-L1100-Up-Low	1,1	5 lbs	70600444***
	FX2-ORIG-D50-L1100-Up-PLUS	1,1	3,3	70600544**
	FX2-ORIG-D50-L1100-Down-Low	1,1	5 lbs	70600644***
	FX2-ORIG-D50-L1100-Down- Through	1,1	4 lbs	70600744****
	FX2-ORIG-D50-L1500-Up-Low	1,5	5.7 lbs	70600844***
	FX2-ORIG-D50-L1500-Up-PLUS	1,5	7.9 lbs	70600944**
	FX2-ORIG-D50-L1500-Down-Low	1,5	5.7 lbs	70601044***
M.	FXZ-ORIG-D50-L1500-Down- Through	1,5	4.6 lbs	70601144****

^{*}Up/Down-Low **Up-PLUS ***Up-Low ****Down-Low ****Down-Through



	[accessory]	[partno]
	FX-Bracket kit-D50/75/100-L190	70501144
Ť	FFX2-Bracket kit-D50/75/100-L500	70377042
	FX2-Wall BRKT kit-Flat-L190-White	70377043
	FX2-Wall-P BRKT kit-D50/75/100-L190	70377046
	FX2-Bench bracket kit-D50/75/100	70501444
0	FX-Classic bracket-D50/75/100	70501244
	FX-Cut2fit extension-L1100.	70501344
	FX-Cut2fit extension-L2200	70374600
(10.20)	FX-Ceiling cover plate	70502644
	FX2-Ceiling cover plate-PLUS	70377045
	FX-Combi hood-ORIGINAL-D50/75/100	70500144
China China	FX-Dome hood-ORIGINAL-D50/75/100	70376982
	FX-Metal hood-ORIG/CHEM-D50/75/100	70500444
	FX-Flange hood-ORIGINAL-D50/75/100	70502844
	FX2-Duct connector-ORIG/CHEM-D50	70377036
	FX2-Al duct-L1000-D50toD77	70377056
	FX2-Al duct-L2000-D50toD77	70377057
	FX-Hose-D75-L3000-Grey	70377098
6	FX2-Hose support ring-D75	70377067




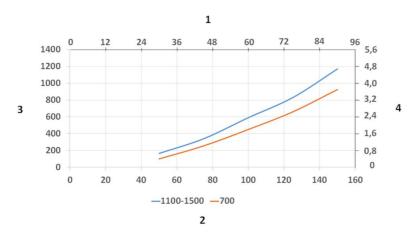

Pressure Drop diagram: 1) X- Axis: Air Flow Rate (cfm) 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Static Pressure Drop (Pa) 4) Y-Axis: Static Pressure Drop (in. wg.)




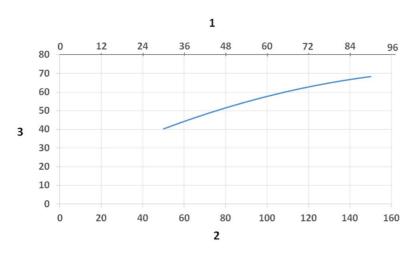

Sound Level diagram: 1) X- Axis: Air Flow Rate (cfm) 2) X- Axis: Air Flow Rate (m/h)

3) Y-Axis: Sound Pressure Level (dB) (A))




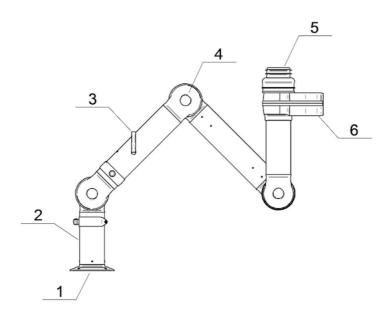

Material:

- 1) Flange: PP
- 2) Tubes: Aluminum, anodized 10 µm
- 3) Damper adjustment handle: Aluminum, anodized 10 μ m Internal spring: Staineless steel Damper blade: Conductive TP & PP plastic
- 4) Joints: PP with glass fibre reinforcement
 Plastic rings: PP with glass fibre reinforcement
 Axial locking rings: PP with glass fibre reinforcement
 Adjustment knobs: PA & EDS plastic
 Threaded shaft inside joints: Stainless Steel
- 5) Duct connector: EPDM Rubber
- 6) Swivel: Aluminum, powder coating Rivets: Aluminum Bearings swivel: PP plastic with glass fibre reinforcement



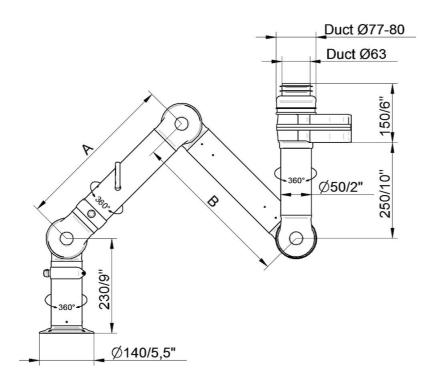

• FX2-ORIG-D50-L700-Up/Down-Low Part number: 70600144 Max. working radius: 630 mm (24,8 in) A: 400 mm (15,7 in)


• FX2-ORIG-D50-L1100-Up-Low Part number: 70600444 Max. working radius: 1030 mm (40,5 in) A: 400 mm (15,7 in) B: 400 mm (15,7 in)

•FX2-ORIG-D50-L1500-Up-Low Part number: 70600844 Max. working radius: 1430 mm (56,3 in) A: 500 mm (19,7 in) B: 700 mm (27,6 in)



13-04-2024

BenchTop Extraction Arm FX2 50 Original

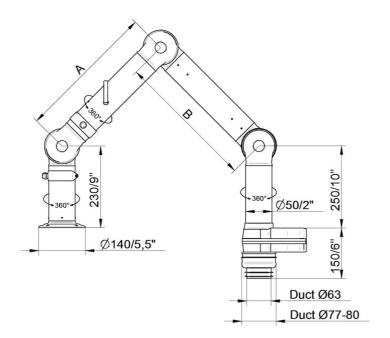

• FX2-ORIG-D50-L700-Up/Down-Low Part number: 70600144 Max. working radius: 630 mm (24,8 in) A: 400 mm (15,7 in)


• FX2-ORIG-D50-L1100-Down-Low Part number: 70600644 Max. working radius: 1030 mm (40,5 in) A: 400 mm (15,7 in) B: 400 mm (15,7 in)

• FX2-ORIG-D50-L1500-Down-Low Part number: 70601044 Max. working radius: 1430 mm (56,3 in) A: 500 mm (19,7 in) B: 700 mm (27,6 in)



13-04-2024

BenchTop Extraction Arm FX2 50 Original

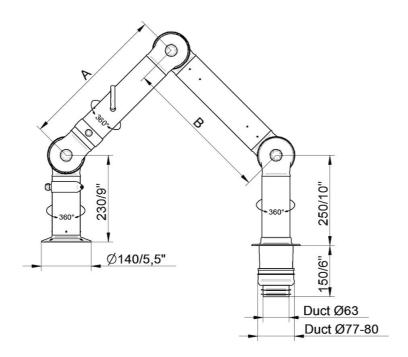


Part number: 70600344 Max. working radius: 630 mm (24,8 in) A: 400 mm (15,7 in)

• FX2-ORIG-D50-L1100-Down-Through Part number: 70600744 Max. working radius: 1030 mm (40,5 in) A: 400 mm (15,7 in) B: 400 mm (15,7 in)

• FX2-ORIG-D50-L1500-Down-Through Part number: 70601144 Max. working radius: 1430 mm (56,3 in) A: 500 mm (19,7 in) B: 700 mm (27,6 in)



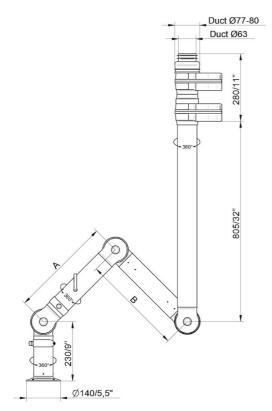

• FX2-ORIG-D50-L700-Up-PLUS Part number: 70600244 Max. working radius: 630 mm (24,8 inch) A: 400 mm (15,7 in)


• FX2-ORIG-D50-L1100-Up-PLUS Part number: 70600544 Max. working radius: 1030 mm (40,5 in) A: 400 mm (15,75in) B: 400 mm (15,7 in)

• FX2-ORIG-D50-L1500-Up-PLUS Part number: 70600944 Max. working radius: 1430 mm (56,3 in) A: 500 mm (19,7 in) B: 700 mm (27,6 in)



13-04-2024

BenchTop Extraction Arm FX2 50 Original

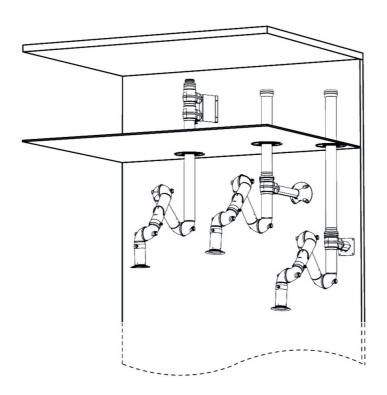

Wall mounting examples: Left: FX2-Up-PLUS arm with following accessories:

-FX2-Wall-P BRKT kit-D50/75/100-L190 -FX2-Ceiling cover plate-PLUS


Middle: FX2-Up-Low arm with following accessories:

- -FX2-Bracket kit-D50/75/100-L500
- -FX2-Ceiling cover plate-PLUS
- -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D75

Right: Up-Low arm with following accessories:

- -FX2-Wall BRKT kit-Flat-L190-White
- -FX2-Ceiling cover plate-PLUS -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D75




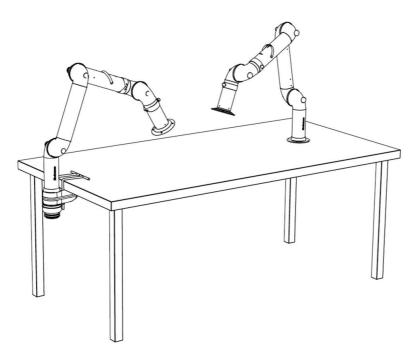

Bench mounting examples: Left: FX2-Down-Low arm with following accessories: -FX2-Bench bracket kit-D50/75/100

Right: FX2-Down-Through arm



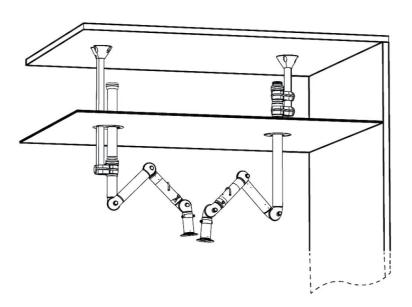

Ceiling mounting example:


Left: FX2-Up-Low arm with following accessories:

- -FX-Classic bracket
- -FX-Cut2fit extension-L1100
- -FX2-Alu duct
- -FX2-Duct connector-ORIG/CHEM-D75
- -FX-Ceiling cover plate

Right: FX2-Up-PLUS arm with following accessories:

- -FX2-Bracket kit-D50/75/100-L500
- -FX2-Ceiling cover plate-PLUS



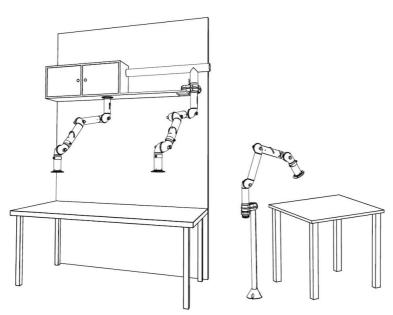

Other mounting examples:

Left: Over bench cabinet mounting with FX2-Up/Down-Through arm

Middle: Shelf mounting with FX2-Up-Low arm and following accessories: -FX2-Bench bracket kit

 $\label{thm:polynomial} \textbf{Right: Floor mounting with FX2-Up-Low arm and following accessories:}$

- -FX-Classic bracket
- -FX-Cut2fit extension-L1100