

Magna Track ST

Eksosavtrekk for utrykningsstasjoner med mindre frekvens



Magnatrack ST er designet for stasjoner med mindre frekvens. Den fritt hengende utløpsslangen er utstyrt med et dreibart festet til en balanseblokk som beveger seg på føringskinnen. En bryter på sporet skiller hele slange fra bilen i en ett-trinns-prosess, noe som minimerer stress eller belastning fra bilen til eksosslangen eller takbeslag. Magnatrack ST er tilgjengelig i lengder fra 6 til 12 m (20 til 40 fot), og passer biler med lave monterte eksosrør.

Kapasitet: 1 bil per system

Eksosrør: low level eksosrør

Normal exit-hastighet opptil 15 km / t - 10 mph For rygging (eller 'drive-through')

Valgfri automatisk start/stopp-enhet som tilbyr:

-Praktisk styring av viftestart/stopp

-Sikker kontroll av luftkvalitet (kildeventilasjon starter automatisk når kjøretøyets motor starter)

-Enkel programmering

-Godkjenning for radioutstyr iht. EU-direktivene, FCC (USA) og IC (Canada)

- Capacity: 1 vehicle per system
- Exhaust pipes: low level tail pipes
- Normal exit speed up to 15 km/h - 10 mph
- For reverse-in (or drive-through)
- Optional automatic start/stop device that offers:
 - Practical control of fan start/stop
 - Safe control of air quality (source ventilation automatically starts when vehicle engine starts)
 - Simple programming
 - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

Produktnavn	Magna Track ST
Further technical data	Nozzle Ø: 160mm Nozzle hose length: 0,6m
Slangediameter (mm)	125
Avklaring av teknisk informasjon	Including - Aluminum track (1), Mounting brackets for 2.4 m distance (2), Rubber stop (3), Sliding block (4), Balancer (5), Swivel (6), Hose connector, Exhaust hose (7), Low level nozzle (8), Electro-magnet assembly (9), Anchor plate (10), Disconnection switch (11), Transformer (12)












Magna Track ST


Navn på datablad	Slangelengde (m)	Model
Magna Track ST	5	20807264*
Magna Track ST	5	20807164*
Magna Track ST	9	20807364*
Magna Track ST	11,5	20807464*

**Including - Aluminum track (1), Mounting brackets for 2.4 m distance (2), Rubber stop (3), Sliding block (4), Balancer (5), Swivel (6), Hose connector, Exhaust hose (7), Low level nozzle (8), Electro-magnet assembly (9), Anchor plate (10), Disconnection switch (11), Transformer (12)*

Magna Track ST

	Tilbehør	Artikkelnummer
	Forankringsplate for magnatrack.	20372003
	Anchor plate shutter in two parts	20371853
	Forankringsplate, lukker: i 3 deler	20371868
	Radiosender, kjøretøy GHz	20376723
	Radiomottaker GHz	20376724
	Håndholdt radiosender GHz	20376725
	Programsett for radiosystem	20376726
	Slangebeskyttelse ø130/160 (par)	20374428
	Vristøtte, HL-munnstykke (16)	20374364
	Forlengelsesskaft, HL-munnstykke (17)	20374359

Magna Track ST

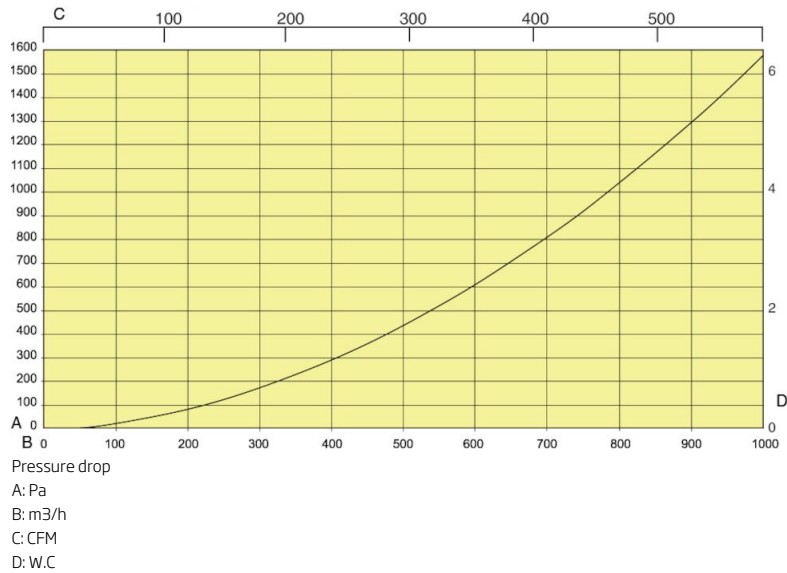

Pressure drop valid for 6 and 7 m track with 5 m hose, Ø 125 mm, and HB 600LL nozzle.

Airflow recommendations:
 Heavy vehicles: 1000 - 1200 m³/h
 Car / SUV: 400 - 600 m³/h

Magna Track ST

