

## Magna Track ST

### Uitlaatgasafzuiging voor hulpposten met minder runs



MagnaTrack ST is ontworpen voor stations met minder runs. De vrijhangende afvoerslang is voorzien van een zwenking bevestigd aan een stabilisator, die op de geleidingsbaan beweegt. Een schakelaar op de baan scheidt in een proces van een stap het volledige slangstelsel van het voertuig, waardoor spanning of druk van het voertuig op de afvoerslang of plafondhaken wordt beperkt.

MagnaTrack ST is beschikbaar in lengten van 6 tot 12 m (20 tot 40 ft) en past op voertuigen met laag gemonteerde uitlaatpijpen.

Capaciteit: 1 voertuig per systeem

Uitlaatpijpen: lage uitlaatpijpen

Normale uitgangssnelheid tot 15 km/h - 10 mph

Voor achteruit (of in beweging)

Optioneel automatisch start/stop apparaat dat het volgende biedt:

- Praktische besturing van de ventilator start/stop
- Veilige besturing van luchtkwaliteit (bronventilatie start automatisch wanneer de motor van het voertuig start)
- Eenvoudige programmering
- Goedkeuring voor radio-apparatuur volgens EC-richtlijnen, FCC (VS) en IC (Canada)

- Capacity: 1 vehicle per system
- Exhaust pipes: low level tail pipes
- Normal exit speed up to 15 km/h - 10 mph
- For reverse-in (or drive-through)
- Optional automatic start/stop device that offers:
  - Practical control of fan start/stop
  - Safe control of air quality (source ventilation automatically starts when vehicle engine starts)
  - Simple programming
  - Approval for radio equipment acc. to EC directives, FCC (USA) and IC (Canada)

<b>Product naam</b>	Magna Track ST
<b>Further technical data</b>	Nozzle Ø: 160mm Nozzle hose length: 0,6m
<b>Slangdiameter (m)</b>	125
<b>Toelichting van technische gegevens</b>	Including - Aluminum track (1), Mounting brackets for 2.4 m distance (2), Rubber stop (3), Sliding block (4), Balancer (5), Swivel (6), Hose connector, Exhaust hose (7), Low level nozzle (8), Electro-magnet assembly (9), Anchor plate (10), Disconnection switch (11), Transformer (12)












# Magna Track ST


Naam voor Datasheet	Slanglengte (m)	Model
Magna Track ST, 6m track length	5	20807264*
Magna Track ST, 7m track length	5	20807164*
Magna Track ST, 9,5m track length	9	20807364*
Magna Track ST, 12m track length	11,5	20807464*

*\*Including - Aluminum track (1), Mounting brackets for 2.4 m distance (2), Rubber stop (3), Sliding block (4), Balancer (5), Swivel (6), Hose connector, Exhaust hose (7), Low level nozzle (8), Electro-magnet assembly (9), Anchor plate (10), Disconnection switch (11), Transformer (12)*

## Magna Track ST

Toebehoren		Artikelnummer
	Anchor plate for magnatrack.	20372003
	Anchor plate shutter in two parts	20371853
	Anchor plate, shutter, in 3 parts	20371868
	Radio transmitter vehicle GHz	20376723
	Radio Receiver GHz	20376724
	Handheld radio transmitter GHz	20376725
	Program kit for radio system	20376726
	Slang beschermingshoes Ø 130/160 mm (set)	20374428
	Twist support, HL nozzle	20374364
	Lengthening shaft, HL nozzle	20374359

## Magna Track ST

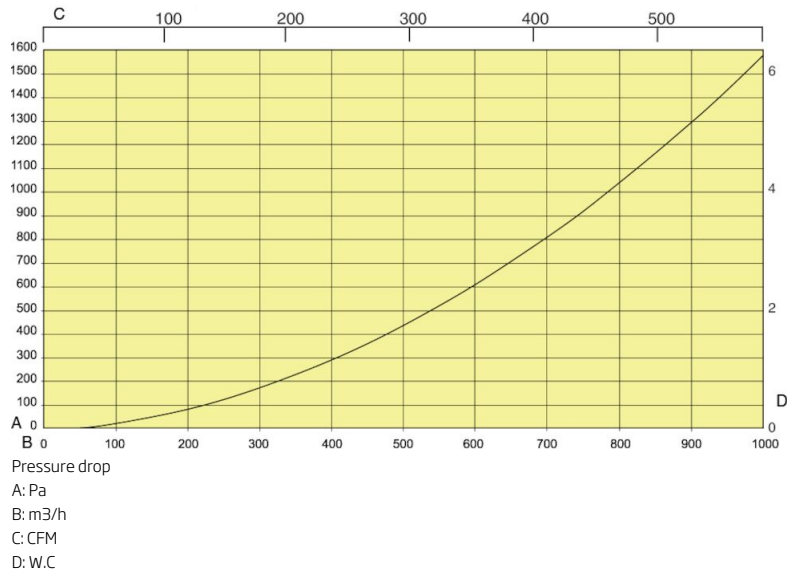

Pressure drop valid for 6 and 7 m track with 5 m hose, Ø 125 mm, and HB 600LL nozzle.

Airflow recommendations:  
Heavy vehicles: 1000 - 1200 m³/h  
Car / SUV: 400 - 600 m³/h

## Magna Track ST

