

Extraction Arm NEX S Ø125

Extraction arm that fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands.



The NEX S arm fulfills all requirements for use in environments containing explosive dust and gas, and with extremely high hygienic demands. It has a double-earthed system and antistatic earthed ventilation hose that prevents static electricity and sparks. Open support arm system and hood of acid proofed polished stainless steel requires a minimum of maintenance and makes it easy to clean. The NEX S is not marked with the EX symbol since it does not fall under the scope of the directive 2014/34/EU. Even if it does not have the EX marking, it is highly suitable for use in zones 1/21, 2/22 according to ATEX-work directive 1999/92/EC. The arm is double-earthed, by the helix in the hose and through the arm system. The hose is made of antistatic Polyurethane.

- Little maintenance
- Easy to clean
- Double earthed
- Flexible arm, easy to position
- Recommended for use in explosive environments, zone 1/21, 2/22

Product name	Extraction Arm NEX S Ø125
Noise level (dB(A))	65-71
Installation	[Indoor]
Fume temperature	Max 70°C (158 F)
Extraction arm diameter (in)	125
Airflow (CFM)	1000
Colour	
Diameter, hose (in)	5 in




Extraction Arm NEX S Ø125

Description	Arm length (ft)	Weight (lbs)	[model]
Extractor arm Nex stainless	2m / 7 ft	29	10520232
Extractor arm Nex stainless	3m / 10 ft	41	10520332
Extractor arm Nex stainless	13 ft 1in	52	10520432
Extractor arm Nex stainless with damper	6 ft 6 in	29	10521832
Extractor arm Nex stainless with damper	9 ft 10 in	41	10521932
Extractor arm Nex stainless with damper	13 ft 1 in	52	10522032

Extraction Arm NEX S Ø125

	[accessory]	[partno]
	Extension set 0,6m Nex S	10512232

Extraction Arm NEX S Ø125

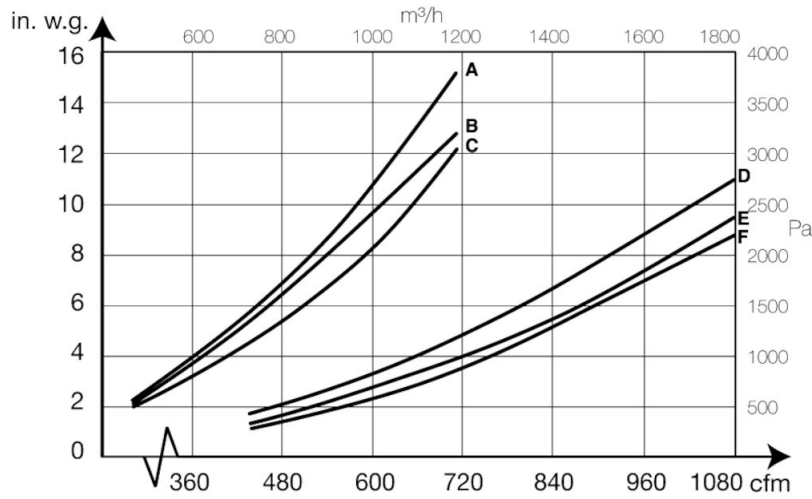

X: airflow m³/h Y: static pressure Pa A= 4 m Ø125 mm, B= 3 m Ø125 mm, C= 2 m

Ø125 mm, D= 4 m Ø160 mm, E= 3 m Ø160 mm, F= 2 m Ø160 mm

