

## Industrial vacuum cleaner 426A EX

Vacuum for extraction of waste and powders




Industrial dry vacuum cleaner 426EX is designed for removal and collection of industrial waste and spillage. This powerful dry vacuum suction unit comes equipped with a silo and cyclonic pre-separator before the filter, ensuring efficient collection of large quantities of material. The 426EX Industrial vacuum is equipped with a HEPA filter for finer particles. The industrial vacuum cleaner includes slots for handling by forklift. Special swiveling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially easy. The dry vacuum's cyclonic silo is equipped with a manual valve.

ATEX approved equipment: EX II 2 GD c IIB 60°C (T6).


- ATEX approved
- Pre-separation in silo
- Manual filter cleaning prolongs the filter's lifetime
- Forklift handling

<b>Product name</b>	Industrial vacuum cleaner 426A EX
<b>Installation</b>	[Indoor]
<b>Filter cleaning method</b>	[ReverseAirPulse]
<b>Application</b>	[dust], [liquid], [granulate], [swarf]
<b>Dustbin volume (l)</b>	58 l cyclonic silo + 47 l dust bin
<b>Hose length (m)</b>	7.5
<b>Filter Area (m<sup>2</sup>)</b>	1,56
<b>Filter type</b>	[cartridge]
<b>Number of filter elements</b>	1
<b>Filter material</b>	Microfibre
<b>Type of hose</b>	PVC
<b>Compressed air requirement</b>	3,0 Nm <sup>3</sup> /min
<b>Max airflow (m<sup>3</sup>/h)</b>	342
<b>Noise level (dB(A))</b>	75,5
<b>Max vacuum (kPa)</b>	-52
<b>Weight (kg)</b>	119
<b>Hose length (m)</b>	7,5
<b>Hose diameter (mm)</b>	51
<b>Note</b>	With cleaning set, brush and conical nozzle. ATEX: EX II 2 GD c IIB 60°C(T6)



Granulate Swarf Dust Liquid


## Industrial vacuum cleaner 426A EX

[image]	Description	[model]
	426A EX - NE52, S50, with manual discharge valve	42242609*

\*With cleaning set, brush and conical nozzle. ATEX: EX II 2 GD c IIB 60°C(T6)

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC		- 20 deg. C. to + 70 Deg. C.				

## Industrial vacuum cleaner 426A EX

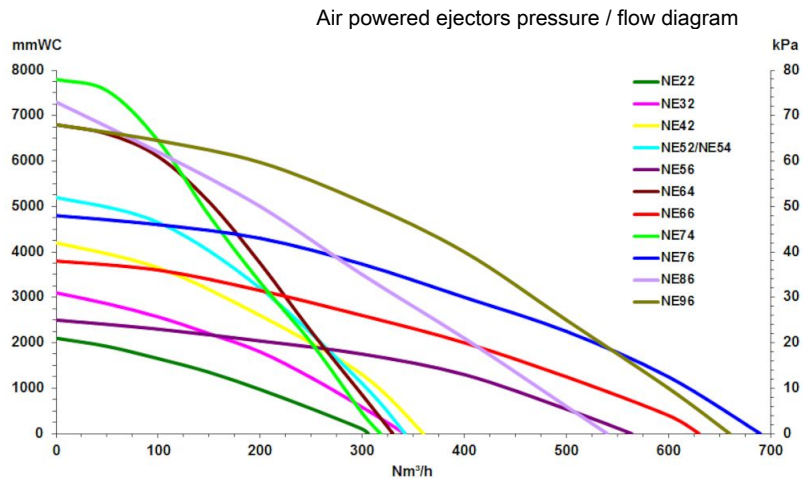

Air Powered ejectors

All performance data are based on 7 bar supply pressure