

## Industristøvsuger 116A

Industristøvsuger til fjernelse af ikke-brændbare væsker og granulat



A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

- Comes with NE 52 powerhead
- Wet & Dry cleaning
- Vacuuming capacity
- Easy handling
- Tippable trolley; Bottom discharge optional

Produkt navn	Industristøvsuger 116A
Type af filter	Filterpose
Antal filter	1
Filtermateriale	
Slangetype	PVC
Trykluftbehov	3,0 Nm <sup>3</sup> /min
Maks. luftmængde (m <sup>3</sup> /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Vægt (kg)	51
Slangelængde (m)	7,5
Hose diameter (mm)	51
Afklaring af tekniske data	Med rengøringsæt, børste, konisk og tandet mundstykke






## Industristøvsuger 116A

Beskrivelse	Model
116A - NE52, S50.	42111600*
116A - NE52, S50, container w/ballvalve R2	42111607*


\*Med rengøringsæt, børste, konisk og tandet mundstykke

Slangetype	Specifikation	Temperaturområde, °C	Slangekobling, fri ende distributionslange	Slangekobling, fri ende tilslutningslange	Slangtilslutning, distributionslange	Slangekobling, tilslutningslange
PVC	Max vakuum 84 kPA. Indre bøjningsradius 60 mm. Forstærket med indlagt stål helix	- 20 deg. C. to + 70 Deg. C.				

# Industristøvsuger 116A

Tilbehør		Artikelnummer
	Control S for NE 22-76	43220001
	Control S for NE 22-76	43220026
	Control S for NE86-96	43222008

## Industristøvsuger 116A

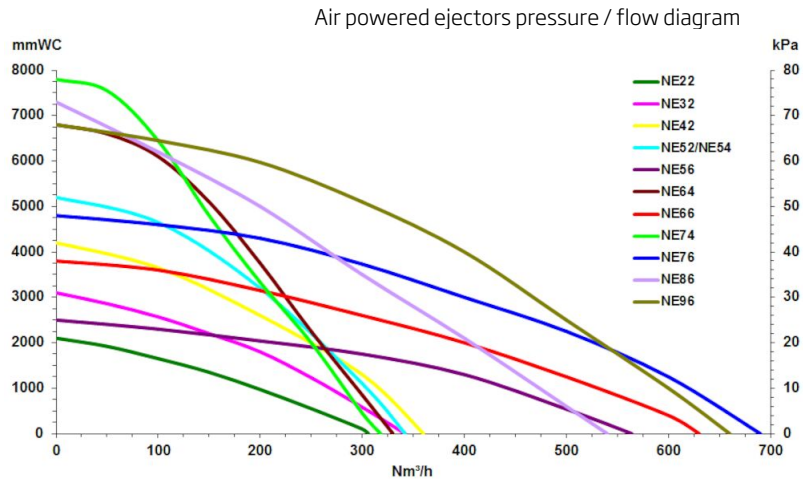

Air Powered ejectors

All performance data are based on 7 bar supply pressure