

425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Název produktu	425A
Typ filtru	Vložka
Počet filtračních elementů	1
Typ hadice	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Hmotnost (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Ujasnění technických údajů	






425A


Jméno datasheetu	[model]
425A - NE52	42142500

Typ hadice	Specifikace	Rozsah teplot, °C	Hadicový fitink na volném konci hadice, distribuční hadice	Hadicový fitink na volném konci hadice, přívodní hadice	Připojení hadice na naviják, distribuční hadice	Připojení hadice na naviják, přívodní hadice
PVC	Max podtlak 84 kPa Vnitřní poloměr ohybu 60mm Vyztuženo vloženou ocelovou spirálou	- 20 deg. C. to + 70 Deg. C.				

425A

[accessory]		[partno]
	Ovládání Spro NEB5-96	43222008
	Ovládání Spro NE 22-76	43220026
	Kontrola S pro NE 22-76	43220001

425A

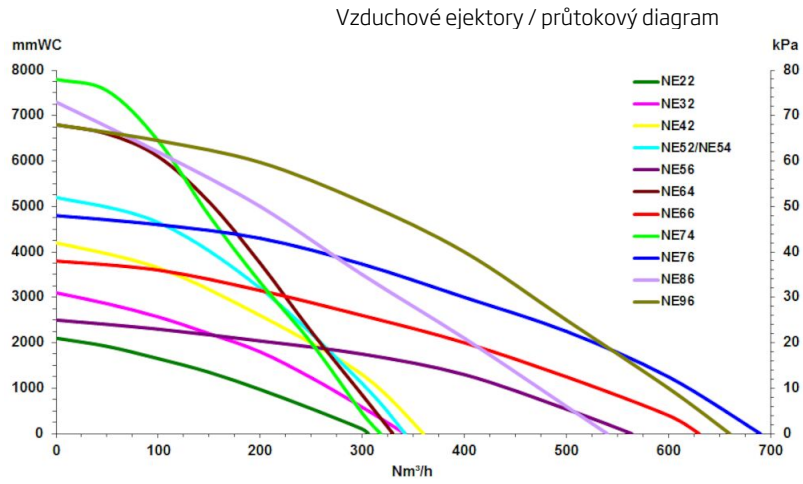

Vzduchové ejektory

Všechny údaje o výkonu jsou založeny na tlaku vzduchu 7 barů