



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- · Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- · automatic filtercleaning

Product name	Industrial vacuum cleaner 425A
Type of hose	PVC
Compressed air requirement	3,0 Nm3/min
Max airflow (m³/h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Weight (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51

 $\epsilon$ 




Description	[model]	
425A - NE52	42142500	

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PVC		- 20 deg. C. to + 70 Deg. C.				



	[partno]	
	Timer electrical control for ejector NE 86-96, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43222008
	Timer electrical control for ejector NE 22-76, without control box. Mounted on the compressed air connection. (Suction time: 0 - 15 min, Discharge time: 0-15 sek)	43220026
0°	Electrical control system for ejectors NE 22-76. (Suction time: 0-5 min, Discharge time: 0-15 sek)	43220001



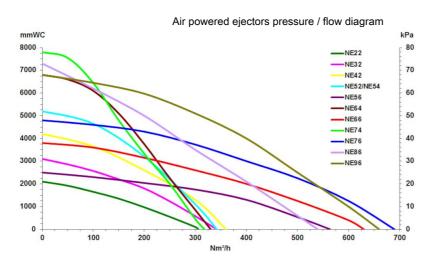

Air Powered ejectors

All performance data are based on 7 bar supply pressure