

425A

Industrial vacuum cleaner for removal of industrial waste



Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

- Dry waste suction
- Silo pre-separator with manual outlet valve
- Fork lift handling
- Sturdy trolley system with large wheels for uneven ground
- automatic filtercleaning

Produktnavn	425A
Filtertype	Kassetfilter
Antall filterelementer	1
Slangetype	PVC
Compressed air requirement	3,0 Nm ³ /min
Max airflow (m ³ /h)	342
Noise level (dB(A))	75,5
Max vaccum (kPa)	-52
Vekt (kg)	119
Hose length (m)	7,5
Hose diameter (mm)	51
Avklaring av teknisk informasjon	





425A


Navn på datablad	Model
425A - NE52	42142500

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpsslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpsslange
PVC	Maks vakuüm -84kPa. Indre bøyeradius 60mm. Forsterket med innstøpt stålspiral.	- 20 deg. C. to + 70 Deg. C.				

425A

Tilbehør		Artikkelnummer
	Control S for NE86-96	43222008
	Control S for NE 22-76	43220026
	Control S for NE 22-76	43220001

425A

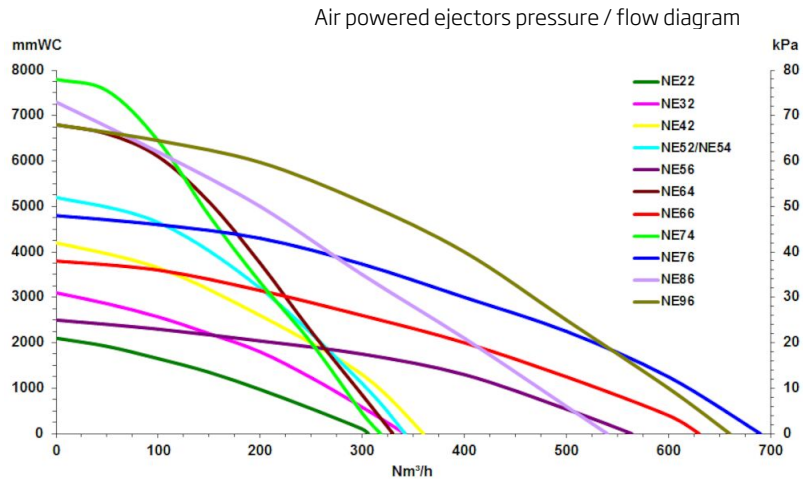

Air Powered ejectors

All performance data are based on 7 bar supply pressure