

## Industrial vacuum cleaner 115A EX

Industrial vacuum cleaner for cleaning of liquids and spillage.



Wet/dry vacuum cleaner with a single container system for suction and transportation of various liquids like oil, chemical spillage, mud, cooling liquids, and water, as well as metal chips, sand, and other granules. The industrial vacuum cleaner can fill the container with liquids in about a minute or two and the suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

ATEX approved equipment: EX 3GD c IIC 60°C (T6).

- Float ball prevents overfilling of liquids.
- Multi-purpose vacuum unit.
- Tippable container with ball valve.
- ATEX approved.

<b>Product name</b>	Industrial vacuum cleaner 115A EX
<b>Application</b>	[dust], [liquid], [granulate], [swarf]
<b>Filter Area (m<sup>2</sup>)</b>	0,35
<b>Filter type</b>	[bag]
<b>Number of filter elements</b>	1
<b>Filter material</b>	Polyester-Teflon
<b>Type of hose</b>	[PEC]
<b>Compressed air requirement</b>	1,6 Nm <sup>3</sup> /min
<b>Max airflow (m<sup>3</sup>/h)</b>	342
<b>Working pressure (kPa)</b>	700
<b>Noise level (dB(A))</b>	74.0
<b>Max vacuum (kPa)</b>	-31
<b>Weight (kg)</b>	51
<b>Hose length (m)</b>	7,5
<b>Hose diameter (mm)</b>	51
<b>Note</b>	With cleaning set. ATEX: EX II 2 GD c IIC 60°C (T6)



Granulate Swarf Dust Liquid


## Industrial vacuum cleaner 115A EX

Description	[model]
115A Ex - NE32, with float ball	42211500*

\*With cleaning set. ATEX: EX II 2 GD c IIC 60°C (T6)

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PEC		-40 Deg. C. - +60 Deg. C.				

## Industrial vacuum cleaner 115A EX

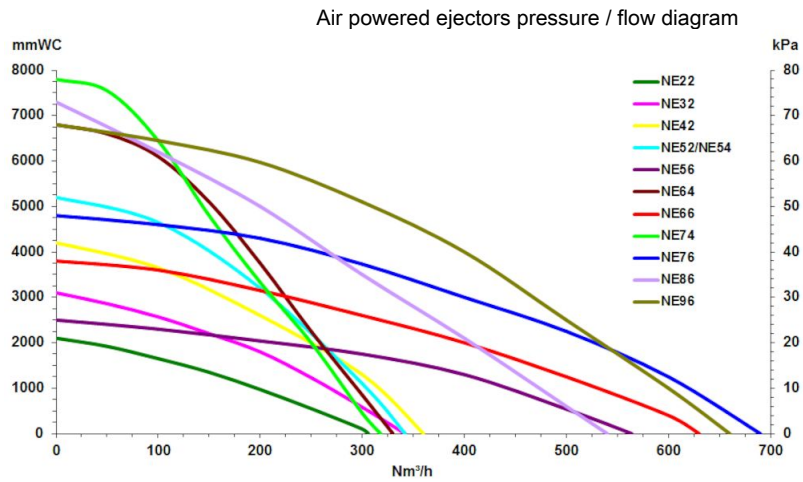

Air Powered ejectors

All performance data are based on 7 bar supply pressure