

Industrial vacuum cleaner 115A EX


Industrial vacuum cleaner for cleaning of liquids and spillage.



Wet/dry vacuum cleaner with a single container system for suction and transportation of various liquids like oil, chemical spillage, mud, cooling liquids, and water, as well as metal chips, sand, and other granules. The industrial vacuum cleaner can fill the container with liquids in about a minute or two and the suction equipment is made for heavy duty work. The container can be tipped for ease of emptying. ATEX approved equipment: EX 3GD c IIC 60°C (T6).

- Float ball prevents overfilling of liquids.
- Multi-purpose vacuum unit.
- Tippable container with ball valve.
- ATEX approved.

Product name	Industrial vacuum cleaner 115A EX
Application	Dust, Liquid, Granulate, Chip
Hose Diameter (in)	2,01
Filter Area (ft ²)	4
Filter type	Bag
Number of filter elements	1
Filter material	Polyester-Teflon
Type of hose	PE/C
Compressed air requirement	1,6 Nm ³ /min
Max airflow (m ³ /h)	342
Working pressure (kPa)	700
Noise level (dB(A))	74.0
Max vacuum (in. wg)	-124
Weight (lbs)	112
Hose length (m)	25
Hose diameter (mm)	2
Note	With cleaning set



Granulate Chip Dust Liquid


Industrial vacuum cleaner 115A EX

Description	Model
115A Ex - NE32, with float ball	42211500*

*With cleaning set

Hose type	Specification	Temperature range, °C	Hose fittings in free hose end, distribution hose	Hose fitting on free hose end, inlet hose	Hose connection on reel, distribution hose	Hose connection on reel, inlet hose
PEC	For cleaning applications Max vacuum 50 kPa Conductivity < 10 ⁶ Ohm	-40 Deg. C. - +60 Deg. C.				

Industrial vacuum cleaner 115A EX

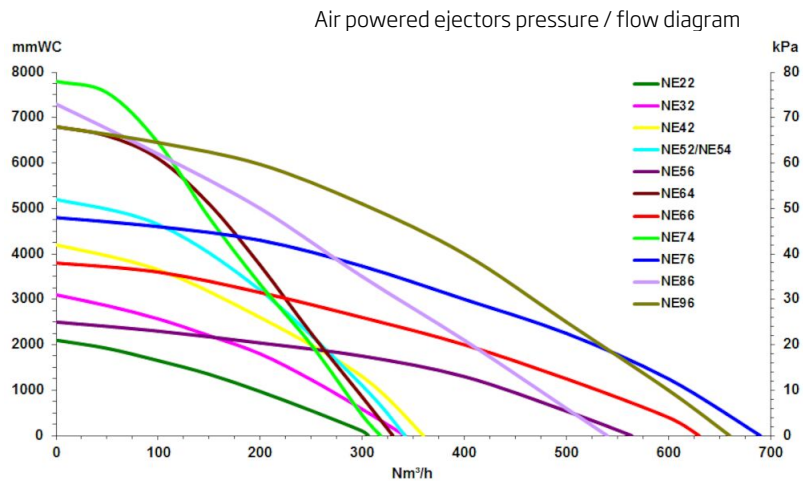

Air Powered ejectors

All performance data are based on 7 bar supply pressure