216A EX

Aspirador industrial para poeira combustivel e recolha de materiais secos.

Os problemas de poeira fina são facilmente resolvidos por este aspirador industrial de alta capacidade para serviço pesado. Pré separador por ciclone eficiente do pó antes do filtro absoluto / HEPA. Sistema de contentor simples com filtro absoluto / HEPA para coleta de pó muito fino e material granulado.
O processo de limpeza do filtro é simples e eficiente. O sistema de ejetor alimentado a ar comprimido consegue gerar fluxo de ar e vácuo necessários para uma eficiente coleta e transporte do material. A unidade pode ser equipada com um recipiente de maiores dimensões para o aumento da capacidade.
Um aspirador para serviços pesados adequado para as indústrias de compósitos, construção e nas indústrias químicas que manipulem pó e outros materiais secos. Equipamento com aprovação ATEX:
II 2G Ex h IIC T60°C (T6) Gb
II 2D Ex h IIIC T60°C (T6) Db

- Pré separação por ciclone
- Limpeza manual do filtro prolonga a vida útil dos elementos filtrantes
- Aspirador com aprovação ATEX

None do Produto	216A EX
Application	Poeira, Granulado, Areia, Fumos, Granalha
Tipo de filtro	Filtro de cassete
Número de elementos filtrantes	1
Material Filtrante	Microfibre
Tipo de mangueira	PE/C
Compressed air requirement	3,0 Nm3/min
Max airflow (m³/h)	342
Noise level (dB(A))	73,5
Max vaccum (kPa)	-52
Peso (kg)	60
Hose length (m)	7,5
Hose diameter (mm)	51
Nota	With cleaning set, brush and conical nozzle.

Granulado Areia Fumos Granalha Poeira

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

216A EX

Descrição	[model]
216A EX - NE52, S50	42221600*

**With cleaning set, brush and conical nozzle.*

Tipo de mangueira	Especificações	Gama de temperatura, °C	Acopladores na extremidade livre, mangueira de distribuição	Acopladores na extremidade livre, mangueira de entrada	Ligação da mangueira no enrolador, mangueira de distribuição	Ligação da mangueira no enrolador, mangueira de entrada
PEC		-40 Deg. C. - +60 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

216A EX

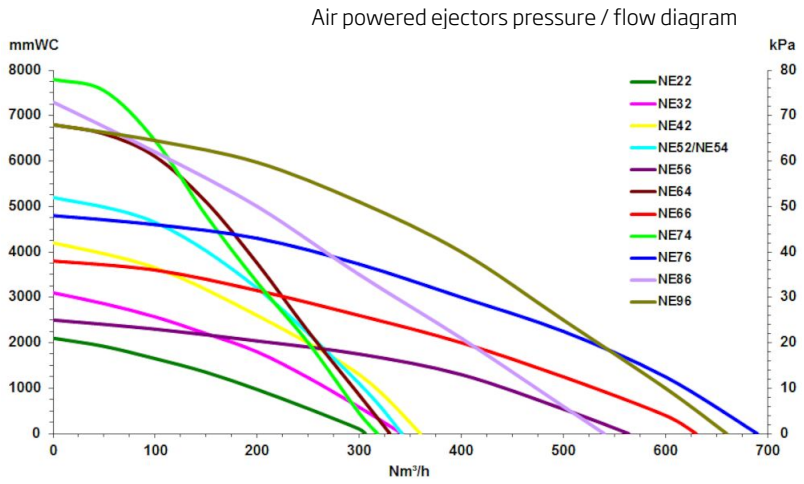

Air Powered ejectors

All performance data are based on 7 bar supply pressure

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB