

OSF 1000

FibreDrain® oil smoke collector for continuous operation.



Nederman FibreDrain® OSF oil smoke collectors are designed to handle large amounts of neat oil mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.



Nederman FibreDrain® OSF 1000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman FibreDrain® OSF units are prepared for use of pre filter. OSF 1000 have an in-built radial fan.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two inlet \varnothing 200 mm with clamp ring connection
- Starter and motor protection included

Product name	OSF 1000
Standard	2009/125/EC
Volume (for shipping) (m ³)	2.45
Noise level (dB(A))	50 Hz: 65 dB(A) @1,5 m from service side 60 Hz: 67 dB(A) @1,5 m from service side
Protection class	IP55
Filter efficiency (%)	99,95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Filter cleaning method	Self-Draining
Working pressure (kPa)	Max 2500 Pa
Capacity (max airflow m ³ /h)	1000
Operating Temperature	40 deg C (inbuilt fan)
No of phases	3
Number of filter elements	3
Colour	NCS-S 1005 B20G
Weight (kg)	245
Power (kW)	1,1
Note	Plus 1 optional filter element. Incl extension legs



OSF 1000

Image	Description	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Model
	OSF 1000, Inlet 2 x ø 200 mm clamp ring left or right. Drain 2 x 1" Female	230/400	50	4,2 / 2,4	12400029*
	OSF 1000, Inlet 2 x ø 200 mm clamp ring left or right. Drain 2 x 1" Female	460	60	1,98	12400963*

*Plus 1 optional filter element. Incl extension legs


OSF 1000

	Accessory	Part No
	Drain pump box, 50 Hz, 10 litre/min at 5m, including controller	12400054*
	Drain container with piping	12400764**
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	FibreDrain Filter 1 OSF; 600x600x292 mm	12400006
	FibreDrain Filter 2 OSF; 600x600x292 mm	12400007
	HEPA Filter H13; 610x610x292 mm	12400012
	Outlet transition, ø 200 mm, for OSF 1000 / OSF 1000-2 / OMF 1000-2 / OMF 2000	12400904
	Outlet transition, ø 250 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400905
	Outlet transition, ø 315 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400906
	Drain pump box, 50 Hz, 10 litre/min at 10m, including controller	12401330
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 2 kPa pressure sensor, 1,5kW	73008913

*Drain connection must be elevated min 200 mm from pump box support level

**Drain connection must be elevated min 420mm from container support level

OSF 1000

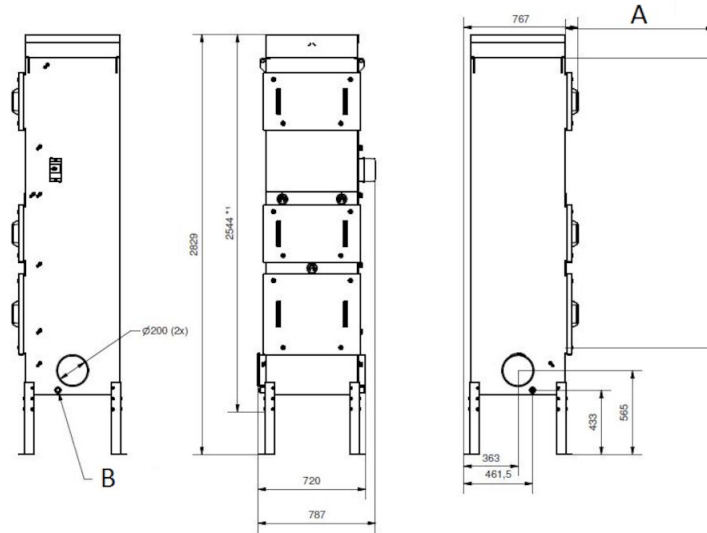

A) 1000 min filler service space

B) Drain stud (x2)