

OMF 6000

FibreDrain® oil mist collector for continuous operation



Nederman FibreDrain® OMF oil mist collectors are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.



Nederman FibreDrain® OMF 6000 has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. All tower built Nederman FibreDrain® OMF units are prepared for use of pre filter. OMF 6000 have a top mounted radial fan.

- Three filter stages, optional pre-filter
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two inlet inlet \varnothing 400 mm with clamp ring connection

Product name	OMF 6000
Standard	2009/125/EC
Volume (for shipping) (m ³)	9.48
Noise level (dB(A))	50/ 60 Hz: 70 dB(A) @1,5 m from service side with ext. Silencer
Protection class	IP55
Filter efficiency (%)	99,95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Working pressure (kPa)	Max 4500 Pa
Capacity (max airflow m ³ /h)	6000
Operating Temperature	60 deg C (limited by filter)
No of phases	3
Number of filter elements	9
Colour	NCS-S 1005 B20G
Weight (kg)	580
Power (kW)	11
Note	Plus 2 optional filter elements. Incl extension legs.




OMF 6000

Image	Description	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Model
	OMF 6000, Inlet 2 x ø 400 mm clamp ring left or right. Drain 2 x 1" Female	400/690	50	19,5 / 11,3	12400036*
	OMF 6000, Inlet 2 x ø 400 mm clamp ring left or right. Drain 2 x 1" Female	460	60	20.5	12400967*

**Plus 2 optional filter elements. Incl extension legs.*


OMF 6000

	Accessory	Part No
	Drain pump box, 50 Hz, 10 litre/min at 5m, including controller	12400054*
	Drain container with piping	12400764**
	Silencer 90° Ø 500 mm	12400038
	Transition NF 11 kW / Ø500 / 1005	12400989
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	FibreDrain Filter 1 OMF; 600x600x292 mm	12400009
	FibreDrain Filter 2 OMF; 600x600x292 mm	12400010
	HEPA Filter H13; 610x610x292 mm	12400012
	Drain pump box, 50 Hz, 10 litre/min at 10m, including controller	12401330
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 5kPa pressure sensor. 11kW	73008918
	Frequency inverter with 5kPa pressure sensor. 15kW	73008919

*Drain connection must be elevated min 200 mm from pump box support level

**Drain connection must be elevated min 420mm from container support level

OMF 6000

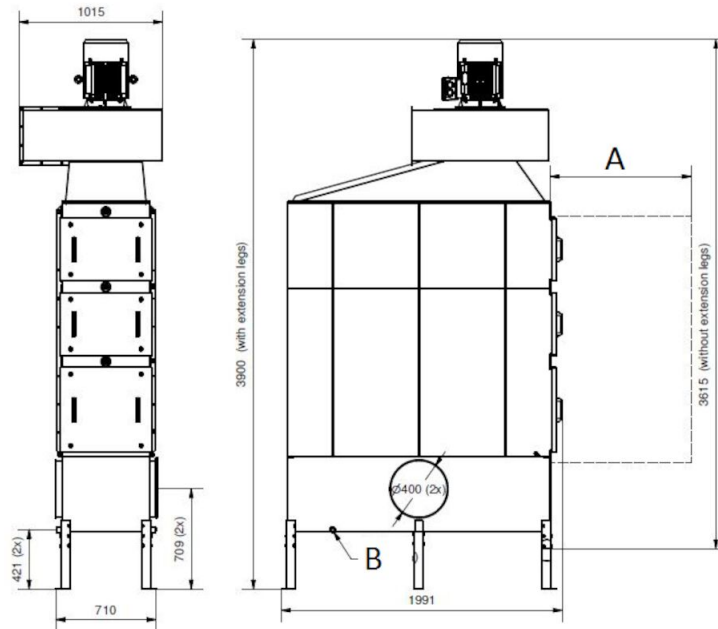

A) 1000 mm filter service space

B) Drainage DN25 (2x)