

OMF 1000 FC

FibreDrain® oil mist collector for continuous operation



Nederman FibreDrain® OMF oil mist collectors are designed to handle large amounts of emulsion mist during continuous operation. They are developed with focus on high efficient filtration together with low maintenance cost.



Nederman FibreDrain® OMF 1000 FC has as standard 3 filter-stages where the first 2 stages consists of filter cassettes with Nederman's FibreDrain® technology. Nederman have a wide range of different types of filters to suit many different kind of applications. The third stage consists of a HEPA filter in filter class H13 with an efficiency of 99,95% for MPPS according to EN1822. OMF 1000 FC have an in-built chamber fan.

- Three filter stages
- Gauges for reading of pressure drop over each filter stage
- Compact design
- Two inlet \varnothing 150 mm with clamp ring connection
- Starter and motor protection included









Product name	OMF 1000 FC
Standard	2009/125/EC
Volume (for shipping) (m ³)	1.1
Noise level (dB(A))	50 Hz: 66 dB(A) @1,5 m from service side 60 Hz: 69 dB(A) @1,5 m from service side
Protection class	IP55
Filter efficiency (%)	99,95
Installation	Indoor
Material	Sheet metal, painted both in- and outside.
Filter cleaning method	Self-Draining
Working pressure (kPa)	Max 2500 Pa
Capacity (max airflow m ³ /h)	1000
Operating Temperature	40 deg C (inbuilt fan)
No of phases	3
Number of filter elements	3
Colour	NCS-S 1005 B20G
Weight (kg)	150
Power (kW)	1,1
Note	



OMF 1000 FC

Image	Description	Power Voltage (V)	Frequency (Hz)	Amperage (A)	Model
	OMF 1000 FC, Inlet Left or Back ø 150 mm clamp ring. Drain 1" Female	230/400	50	4,2 / 2,4	12400001
	OMF 1000 FC, Inlet Left or Back ø 150 mm clamp ring. Drain 1" Female	460	60	4.2	12401119


OMF 1000 FC

	Accessory	Part No
	Drain pump box, 50 Hz, 10 litre/min at 5m, including controller	12400054*
	Drain container with piping	12400764**
	FibreDrain Filter 1 OMF; 300x600x292 mm	12400002
	FibreDrain Filter 2 OMF; 300x600x292 mm	12400003
	HEPA Filter H13; 595x595x100 mm	12400004
	Outlet connection OSF 500FC / OMF 1000FC	12400548
	Drain pump box, 50 Hz, 10 litre/min at 10m, including controller	12401330
	Frequency inverter with 2 kPa pressure sensor. 1,5kW	73008913


*Drain connection must be elevated min 200 mm from pump box support level

**Drain connection must be elevated min 420mm from container support level

OMF 1000 FC

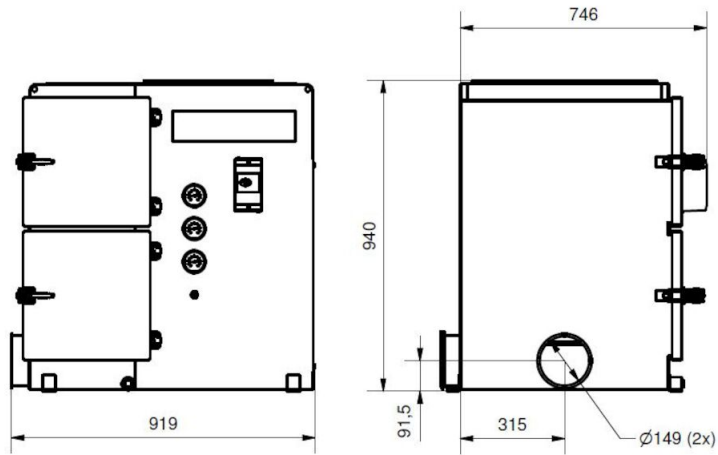

Dimensions for outlet connection:

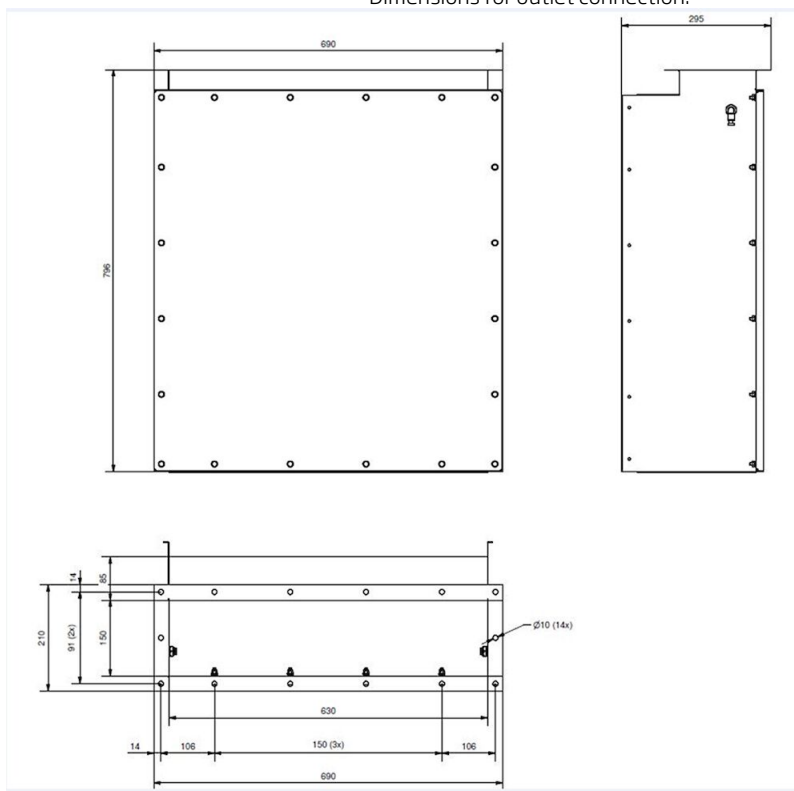

Outlet connection OSF 500FC / OMF 1000FC