

## OSF 1000-2 HE

FibreDrain® oil smoke collector for continuous operation.



The Nederman OSF (Oil Smoke Filter) is designed to handle large amounts of oil smoke during continuous operation. They are engineered for high efficiency filtration coupled with lower maintenance costs.

The OSF 1000-2 HE has an internal, radial fan wheel and two-stage filtration, as standard. The first stage consists of a filter cassette with Nederman's FibreDrain® technology. The second stage is a class H13 HEPA filter with a 99.95% efficiency for MPPS, per EN1822. All tower-style OMF units are designed to accept an optional pre-filter. Nederman offers a wide selection of filters to fit a range of different applications.

- Two (2) filter stages. An optional pre-filter is available.
- Gauges for reading of pressure drop over each filter stage
- Extension legs
- Two (2) Ø200mm inlet locations, one blanked using clamp ring connection.
- Push button start/stop with integral overload protection.

Product name	OSF 1000-2 HE
Standard	2009/125/EC
Volume (for shipping) (ft³)	76.28
Noise level (dB(A))	68 dB(A) @ 5' from service side
Protection class	IP55
Filter efficiency (%)	99,95
Installation	[Indoor]
Material	Sheet metal, painted inside and outside.
Filter cleaning method	[Draining]
Working pressure (psi)	10.0" (External)
Capacity (max airflow cfm)	589
Operating Temperature	104° F, internal fan.
Power Voltage (V)	460
Frequency (Hz)	60
No of phases	3
Amperage (A)	4.2
Weight (lbs)	441
Power (Hp)	1.5 HP
Note	Plus one (1) optional filter element.



## OSF 1000-2 HE

Description	[model]
OSF 1000-2 HE	12401215*

*\*Plus one (1) optional filter element.*


## OSF 1000-2 HE

	[accessory]	[partno]
	Drain container with piping	12400764*
	Optional FibreDrain Pre Filter ORF 610x610x96 mm.	12400039
	HEPA Filter H13; 610x610x292 mm	12400012
	Outlet transition, ø 200 mm, for OSF 1000 / OSF 1000-2 / OMF 1000-2 / OMF 2000	12400904
	Outlet transition, ø 250 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400905
	Outlet transition, ø 315 mm for OSF1000 / OSF1000-2 / OMF1000-2 / OMF2000	12400906
	FibreDrain Filter 2 OSF; 600x600x292 mm	12400007
	Drain pump box, 60 Hz, 10 litre/min at 5m, excluding controller	12401329**
	OSF/OMF Instruction manual for mounting system for electric components	12401342
	OMF/OSF/MQL mounting system for electrical components	12401341
	Frequency inverter with 2 kPa pressure sensor. 1,5kW	73008913

\*Drain connection must be elevated min 420mm from container support level

\*\*Controller available on request.

## OSF 1000-2 HE

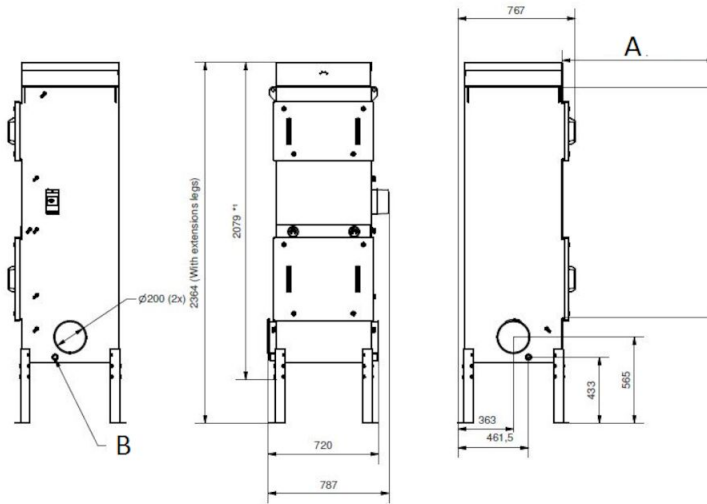

A) 1000 mm min filler service space

B) Drain stud (x2)