


RBU FC

Frequency controlled RBU FC when extra suction is needed when larger and heavier pieces need to be taken care of or need to be transported through long pipelines.

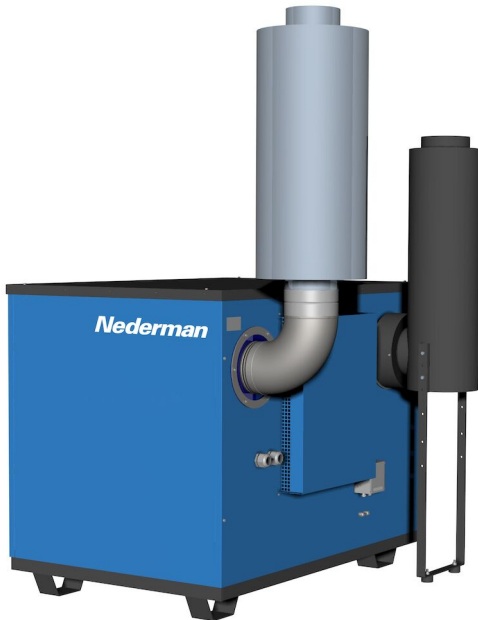

Nederman RBU FC units work uninterruptedly with strong suction and a maintained efficiency. This is the perfect vacuum source in larger systems where powerful vacuum is required to balance for large pressure drop in long pipes or hoses. The frequency controlled RBU FC regulates the speed of the motor depending on the vacuum demand leading to lower power consumption and increased capacity. Also in installations where extra extraction power is needed, e.g. transport heavy materials. As standard supplied with vacuum and discharge silencers, universal valve including vacuum regulator, safety valve and back flush valve.


Applications: cleaning, swarf removal, grinding, sanding, welding.

- Powerful units when extra vacuum is needed.
- Minimized power consumption.
- Low noise level.

Nombre de producto	RBU FC
Nivel sonoro	70
Instalación	Interior, Exterior
Material reciclado (%)	95-97
Capacidad (Máx. caudal m ³ /h)	2600 m ³ /h @ -20 kPa
Further technical data	Compressed air - Clean dry, ISO 8573-1 class 1. Required air pressure = 6 - 10 bar. Max air consumption intermittent = 70 N-Litres/min
Voltaje (V)	400
Frecuencia (Hz)	20-60 Hz
Fases	3
Voltaje de control (V)	24 V DC +/-10%
Noise level (dB(A))	
Capacity (max airflow m ³ /h)	3200
Max vacuum (kPa)	40
Peso (kg)	1326
Potencia (kW)	55
Aclaraciones a la ficha técnica	Motor type - IE3



RBU FC

Imagen	Nombre para ficha de datos	Modelo
	RBU 2600 FC 400V	40105600*

*Motor type - IE3

RBU FC

Accesorio		Referencia
	Curva helicoidal BU 200mm 90°	40132540
	Silenciador LT200	40139100

RBU FC

