

LBR-S SmartFilter

LBR-S SmartFilter with screw conveyor for heavy dust applications

LBR-S SmartFilter



The LBR-S is an advanced, IIoT ready, reverse air baghouse suited for continuous duty applications with medium air volumes and heavy dust loading. The modular filter housing can be scaled based on the required airflow and modules can be field added if additional capacity is required.

Air enters the filter through an inlet module or hopper inlet where the heavy / large dust particles drop out of airstream. The remaining fine particles pass through an array of highly efficient SUPERBAG filters allowing clean air to pass through. As dust accumulates on the filter bags, a regeneration fan located on each filter module blows air in the reverse direction dislodging the collected dust into the hopper where it is evacuated by a screw conveyor into a container or variety of material handling systems.

The LBR SmartFilter features the Insight Control Panel offering complete control of the filter and system accessories. Sensors located throughout the system monitor and collect critical operational data for the local controls and can be connected to the Nederman cloud based IIoT platform for remote monitoring and system data analytics.

- **Configurable.** Modular design combined with a wide range of filter and system accessories allows the LBR SmartFilter to be configured to your factory's unique needs. A variety of filter sizes, depths and ability to handle either overpressure (positive) or vacuum (negative) airflow arrangement means the filter is optimized for your needs.
- **Future Proof.** The LBR SmartFilter controls are IIoT ready as standard, and our proprietary Insight platform enhances their current operation and prepares their factory for a digital future. Filter modules can be added in field if additional capacity is required.
- **Low Operational Cost.** 5-7 years of filter life, low operational pressure losses and efficient filter cleaning reduces the total cost of ownership compared to pulse jet or mechanical shaker alternatives.
- **Regulatory Compliance.** The LBR SmartFilter complies with the latest ATEX and NFPA combustible dust standards and regulations and our trained, experienced sales teams can provide a complete, turn-key compliant system.
- **Sustainability.** The LBR SmartFilter offers an energy efficient solution capable of recovering waste material to be reused or recycled.

Product name	LBR-S SmartFilter
Installation	[Outdoor]
Material	Housing in galvanised steel sheet
Suitable for combustible dust	True

LBR-S SmartFilter

Filter cleaning method	[ReverseAirPulse]
Application	[dust]
Working pressure (psi)	5
Filter Area (ft ²)	Per module HJ: 85 Per module LJ: 40 Per module HE: 42 Per module: LE: 20
Operating Temperature	-20 to 75°C
Power Voltage (V)	208-600
Filter type	[bag]
Filter material	Superbag 2000 XT15 with ø200 mm collar
Weight (lbs)	
Power (Hp)	Regeneration fan - 1,1 kW (option 2,2 kW)
Note	Configurable product



Dust

LBR-S SmartFilter

[model]
LBR-S*


*Configurable product

LBR-S SmartFilter



	[accessory]	[partno]
	Abort Gate 40" Evac Hood	89120405
	32" ABORT GATE EVAC HOOD PARALLEL	89120325
	ABORT GATE-32" BODY ASSY-AUTO-R	89120324
	ABORT GATE-24" EVAC HOOD PAR-R	89120247
	ABORT GATE-24" BODY ASSY- AUTO	89120244
	RETURN AIR 800SQ X 32IN TEE Paint	89705677
	RETURN AIR 800SQ X 40IN CROSS	89705634
	Angle Flange Adapter 16"Qf Gal	89704876

LBR-S SmartFilter

Flange NRSZ4



Flange NRSZ10

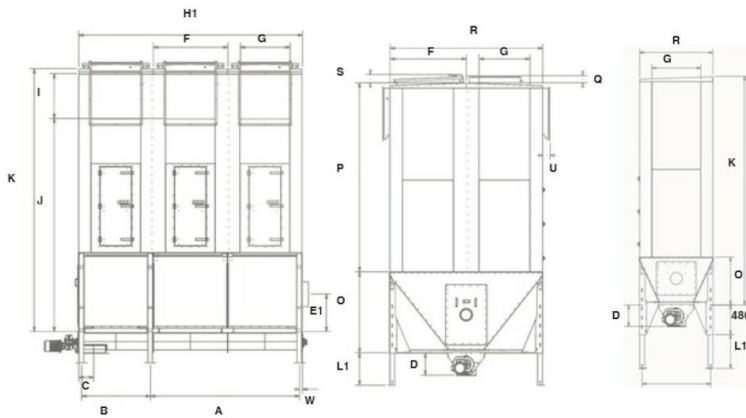

Type	A #	B	C	D	E1	F	G	H1	I	J**	K**	M	O	P**	Q	R	S	U	W
E	2400	1106	242	350	482	1200	800	3600	720	2937	3740	1121	780	2960	135	1200	115	150	47
J	2400	1106	242	350	482	1200	800	3600	720	3420	4220	2321	1260	2960	135	2400	115	150	47

* Optional position of outlet / reg. fan. 800 x 800 or 600 x 600 mm. (LJ version: not on door side)

** Height of LJ version – reduce 1440 mm

*** 400 mm to bottom place in hopper

Optional 1200 mm.


L1 - telescopic filter legs			
Type	Min. Adjust	Max. Adjust	
L= 1196	155	850	
L= 1596	555	1250	
L= 2195	1155	1850	
L= 2596	1555	2250	

Type	Weight per module
HJ - over pressure	567 kg
HE - over pressure	391 kg
HJ - vacuum	742 kg
HE - vacuum	496 kg

Filter length			
Type	H1	Type	H1
1 HJ & LJ	1200	1 HE & LE	1200
2 HJ & LJ	2400	2 HE & LE	2400
3 HJ & LJ	3600	3 HE & LE	3600
4 HJ & LJ	4800	4 HE & LE	4800
5 HJ & LJ	6000		
6 HJ & LJ	7200		

All dimensions in mm.

LBR-S SmartFilter

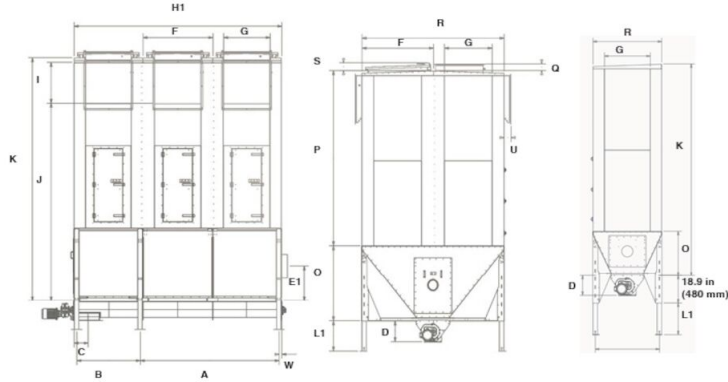

Unit	Type	A #	B	C	D	E1	F	G	H1	I	J**	K**	M	O
mm	J	2400	1106	242	350	482	1200	800	3600	720	3420	4220	2321	1260
in	J	94.5	45.67	9.65	13.78	18.98	47.24	31.50	141.73	28.35	134.65	166.14	91.38	49.61
Unit	Type	P**	Q	R	S	U	W							
mm	J	2960	135	2400	115	150	47							
in	J	116.54	5.31	94.5	4.53	5.91	1.85							

* Optional position of outlet / reg. fan.

Filter length		
Type	H1	
	mm	in
1 HJ	1200	47.24
2 HJ	2400	94.5
3 HJ	3600	141.73
4 HJ	4800	189.0
5 HJ	6000	236.22
6 HJ	7200	283.46

L1 - telescopic filter legs				
Type	Min. Adjust		Max. Adjust	
	mm	in	mm	in
L= 1196	155	6.1	850	33.46
L= 1596	555	21.85	1250	84.65
L= 2195	1155	45.47	1850	72.83
L=2596	1555	61.22	2250	88.58