

LBR-R SmartFilter with rotary valve for heavy dust applications





The LBR-R is an advanced, lloT ready, reverse air baghouse suited for continuous duty applications with medium air volumes and heavy dust loading. The modular filter housing can be scaled based on the required airflow and modules can be field added if additional capacity is required.

Air enters the filter through an inlet module or hopper inlet where the heavy / large dust particles drop out of airstream. The remaining fine particles pass through an array of highly efficient SUPERBAG filters allowing clean air to pass through. As dust accumulates on the filter bags, a regeneration fan located on each filter module blows air in the reverse direction dislodging the collected dust into the hopper where it is evacuated by a rotary valve into a container or material handling system.

The LBR SmartFilter features the Insight Control Panel offering complete control of the filter and system accessories. Sensors located throughout the system monitor and collect critical operational data for the local controls and can be connected to the Nederman cloud based IIoT platform for remote monitoring and system data analytics.

- Configurable. Modular design combined with a wide range of filter and system accessories allows the LBR SmartFilter to be configured to your factory's unique needs. A variety of filter sizes, depths and ability to handle either overpressure (positive) or vacuum (negative) airflow arrangement means the filter is optimized for your needs.
- Future Proof. The LBR SmartFilter controls are IIoT ready as standard, and our proprietary Insight platform enhances their current operation and prepares their factory for a digital future. Filter modules can be added in field if additional capacity is required.
- Low Operational Cost. 5-7 years of filter life, low operational pressure losses and efficient filter cleaning reduces the total cost of ownership compared to pulse jet or mechanical shaker alternatives.
- Regulatory Compliance. The LBR SmartFilter complies with the latest ATEX and NFPA combustible dust standards and regulations and our trained, experienced sales teams can provide a complete, turn-key compliant system.
- Sustainability. The LBR SmartFilter offers an energy efficient solution capable of recovering waste material to be reused or recycled.

Product name	LBR-R SmartFilter
Installation	[Outdoor]
Material	Housing in galvanised sheet steel
Suitable for combustible dust	True



Filter cleaning method	Reverse air pulse
Application	[dust]
Working pressure (kPa)	5
Filter Area (m²)	Per module HJ: 85 Per module LJ: 40 Per module HE: 42 Per module LE: 20
Operating Temperature	-20 to 75°C
Power Voltage (V)	208-600
Filter type	[bag]
Filter material	Superbag 2000 XT15 with ø200 mm collar
Weight (kg)	
Power (kW)	Regeneration fan - 1,1 (option 2,2 kW)
Note	Configurable product







Model
LBR-R*

*Configurable product




	Accessory	Part No
•	Bend 90° Complete 600 x 600	5502984
	fire gate 600 x 600	5503036
	Return Air Component EP No 216	5504255
	Return Air ø800 End Cap	5504911
	Return Air ø1000 End Cap	5504912
	Return Air Duct ø1000	5504914
(1)	Return Air ø800 2xFL/800x800EP	5504915
	Return Air ø1000 2xFL/800x800EP	5504916
	Return Air ø800 3xFL	5504917
	Return Air ø1000 3xFL	5504919
	Return Air Component EP No 239	5504278
	Return Air Component EP No 237	5504276
•	Return Air Component EP No 235	5504274
	Return Air Component EP No 238	5504277
	Return Air Component EP No 236	5504275
	Return Air Component EP No 224	5504263
•	Return Air Component EP No 233	5504272
•	Return Air Component EP No 223	5504262
	Superbag 3000 XT15 Ø200/1420 For L-Filter	5502449
	Superbag 3000 XT15 Ø200/2095 For H-Filter Below Reg.Fan	5502451
	Superbag 3000 XT15 Ø200/655 For L-Filter Below Reg.Fan	5502447
	Superbag 3000 XT15 Ø200/1190 For Vibration Cleaning	5502450



Accessory	Part No
Superbag 3000 XT15 Ø200/2190 For Vibration Cleaning	5502452
Superbag 3000 XT15 Ø200/2630 For Vibration Cleaning	5502454
Superbag 3000 XT15 Ø200/750 For Vibration Cleaning M8 X 475	5502448
Superbag 3000 XT15, Ø200/2860 For H-Filter	5502453



Dimensions

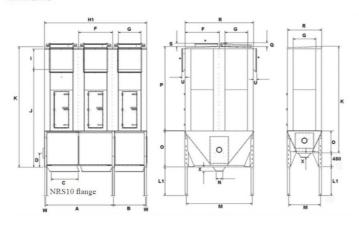


lype	A#			D***					Jee	K**	M			P**						
E	2400	1106	952	485	1200	800	3600	720	2937	3740	1121	240	780	2960	135	1200	115	150	47	132
J	2400	1106	952	485	1200	800	3600	720	3420	4220	2321	240	1260	2960	135	2400	115	150	47	153

Туре	Min. Adjust	Max. Adjust
L= 1196	155	850
L= 1596	555	1250
L= 2195	1155	1850
L=2596	1555	2250

Туре	Weight per module
HJ - over pressure	567 kg
HE - over pressure	391 kg
HJ - vacuum	742 kg
HE - vacuum	496 kg



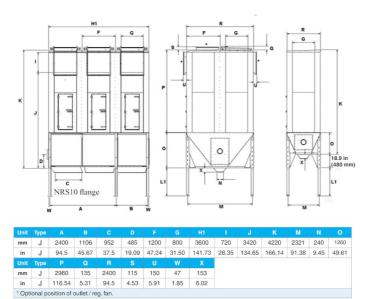

Time		H1
Туре	mm	
1 HJ	1200	47.24
2 HJ	2400	94.5
з нј	3600	141.73
4 HJ	4800	189.0

	L1 - t	elescopic fi	Iter legs		
Time	Min.	Adjust	Max. Adjust		
Туре					
L= 1196	155	6.1	850	33.46	
L= 1596	555	21.85	1250	84.65	
L= 2195	1155	45.47	1850	72.83	
L=2596	1555	61.22	2250	88.58	