

A self-contained downdraft table used for extraction and filtering of dust and odour.



The Nederman Filterbench Carbon range of downdraught benches are designed to control airborne particulate and odour arising from gluing, de-greasing, painting and similar applications. The FilterBench Carbon is available in three different sizes. Easy to use and always with extraction at hand. The FilterBench Carbon should not be used in an environment with danger of explosions or for dust in explosive concentrations. The FilterBench should not be used for hot or spark generating processes such as welding fumes or metal grinding.

- Easy to use and always with extraction at hand
- Pre-filter (G4) and carbon filters as standard
- Simple on/off push button control making the product easy to understand and operate
- Fan inverter included as standard making it possible to optimize air flow and minimize energy consumption
- Castors with swivel and brake included as standard making the product easy and safe to move and position

Medya	FilterBench Downdraft Table with carbon filter
Filtreleme kalitesi (%)	99,9
Kurulum	[Indoor]
Application	[dust], [fumes]
Kol uzunluğu (m)	0
Güç Volt (V)	230
Frekans(Hz)	50
Faz adedi	1
Filtre materyali	
Elektrik prizi	Euro (CEE 7/2 P+E)
Mounting	[mobile]
Filter cleaning method	[OneWayFilter]










[image]	Bilgi Dökümanı ismi	Max airflow (m³/h)	Ağırlık (kg)	Güç (kW)	[model]
	Filtre tezgahı 23, karbon filtreli	2300	230	0,5	73000119
	Filtre tezgahı 23S, karbon filtreli	2300	280	0,5	73000538
	FilterBench 46, karbon filtreli	4600	340	1	73000120
	FilterBench 69, with carbon filter	6900	470	1,5	73000121



	[partno]	
MIMI	Carbon Filter 562mm x 250mm x 50mm	73000086
	Plain rubber mat 740 × 300 × 5mm	73000072
	Perforated rubber mat 740 × 770 × 5mm FB -sp	73000082
MINA	Colourcell 562mm x 250mm x 50mm	73000087
	Prefilter G4 for FilterBench	12376528



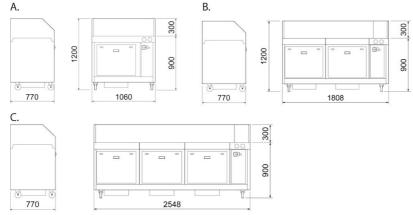

A: FilterBench 23 B: FilterBench 46 C:FilterBench 69