

Dust extraction table



The FilterBench is a self-contained downdraft table and is available in three different sizes. The FilterBench is used for extraction and filtering of dust from materials like composite, plastic, fiberglass and wood arising from lighter processes such as sanding, de-burring, linishing, fettling, ingredient weighing etc. Easy to use and always with extraction at hand. The FilterBench should not be used in an environment with danger of explosions or for dust in explosive concentrations. The FilterBench should not be used for hot or spark generating processes such as welding fumes or metal grinding.

- · Easy to use and always with extraction at hand
- Pre-filter (G4) and HEPA-filter (H13) included as standard
- Simple on/off push button control making the product easy to understand and operate
- Fan inverter included as standard making it possible to optimize air flow and minimize energy consumption
- Castors with swivel and brake included as standard making the product easy and safe to move and position

Product name	FilterBench
Filter efficiency (%)	99,9
Power Voltage (V)	230
Arm length (m)	
Mounting	[mobile]






[image]	Description	Weight (kg)	Power (kW)	[model]
	FilterBench23, with HEPA filter	230	0,5	73003030
	FilterBench23S, with HEPA filter	280	0,5	73003029
,	FilterBench46, with HEPA filter	340	1	73003031
	FilterBench69, with HEPA filter	470	1,5	73003032
	FilterBench23, with Carbon filter	230	0,5	73000119
	FilterBench23S, with Carbon filter	280	0,5	73000538
	FilterBench46, with Carbon filter	340	1	73000120
	FilterBench69, with Carbon filter	470	1,5	73000121




[accessory]		[partno]
	Plain rubber mat 740 × 300 × 5mm	73000072
	Perforated rubber mat 740 × 770 × 5mm FB -sp	73000082



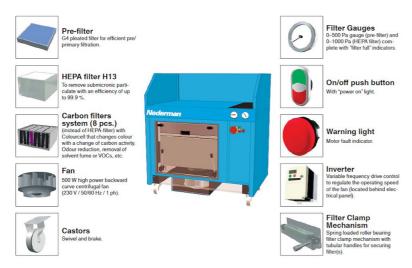

Functional description

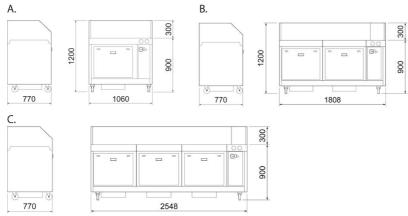

A: FilterBench 23 B: FilterBench 46 C:FilterBench 69