



A centrifugal fan mainly designed for use with Nederman extraction products.

- Compact
- Easy to use

Product name	Fan N40
Noise level (dB(A))	70 at 2500 m3/h
Installation	[Indoor], [Outdoor]
Material	casings: Sheet metal steel Impeller: Sheet metal steel
Airflow (CFM)	2500 (1,5 kW), 4000 (2,2 kW)
Capacity (max airflow cfm)	2350
Ambient temperature range	-20 to +40 C (-4 F to 104 F)
Operating Temperature	Max 140 F (60 C)
Frequency (Hz)	60
No of phases	3
Weight (lbs)	66
Power (Hp)	3.0 (2.2 Kw)






[image]	Power Voltage (V)	Amperage (A)	[model]
	230/460	7,3/3,6	14510223
	575	3,2	14511723



[accessory]	[partno]
Bracket for fan n40	14510226
Manual fan control. 3,2 - 11,5 A, 3 phase.	14518737



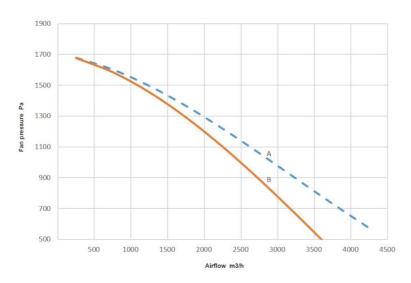

A: Total Pressure

B: Static Pressure

X: m3/h

Y: Pa

