



A centrifugal fan mainly designed for use with Nederman extraction products.

- Compact
- Easy to use

Product name	Fan N40	
Noise level (dB(A))	70 at 2500 m3/h	
Installation	[Indoor], [Outdoor]	
Material	• Fan casings: Sheet metal steel	
	Impeller: Sheet metal steel	
Airflow (m³/h)	2500 (1,5 kW), 4000 (2,2 kW)	
Capacity (max airflow m3/h)	4000	
Ambient temperature range	-20 to +40 C (-4 F to 104 F)	
Operating Temperature	Max. 60 C	
Power Voltage (V)	230/400	
Frequency (Hz)	50	
No of phases	3	



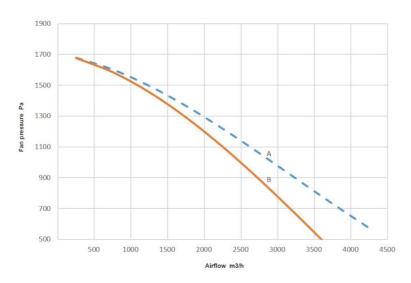


Image	Amperage (A)	Weight (kg)	Power (kW)	Model
	8/4,6	29	2,2	14510123
	5,5/3,2	25	1,5	14510623



Accessory	Part No
Bracket for fan n40	14510226
Manual fan control. 3,2 - 11,5 A, 3 phase.	14518737





A: Total Pressure

B: Static Pressure

X: m3/h

Y: Pa

