

Fan N40



Fan N40

- ✓ Compact
- ✓ Easy to use

A centrifugal fan mainly designed for use with Nederman extraction products.

Note! The fan must not be used in an environment with danger of explosion or for transport of inflammable or explosive gases.

Fan N40


Certifications	CE
Noise level (dB(A))	70 at 2500 m3/h
Installation	Indoor, Outdoor
Material	Fan casings: Sheet metal steel Impeller: Sheet metal steel
Airflow (m³/h)	2500 (1,5 kW), 4000 (2,2 kW)
Ambient temperature range	-20 to +40 C (-4 F to 104 F)
Operating Temperature	Max. 60 C
No of phases	3

Models

	Item no	Power voltage (V)	Frequency (Hz)	Amperage (A)	Cord length (m)	Weight (kg)	Power (kW)
	14510223	230/460	60	7,3/3,6	2	30	2,2
	14510123	230/400	50	8/4,6		29	2,2
	14510623	230/400	50	5,5/3,2		25	1,5
	14511723	575	60	3,2		30	2,2
	14523121	380	60	4,5		29	2,2

Accessories

	Accessory	Item no
	FMS 2.5-4 Fan Manual Starter	14502337
	FMS 4-6.3 Fan Manual Starter	14502437
	Bracket for fan n40	14510226
	Fan ontrol Manual 3,2 - 11,5A, 3 fases	14518737

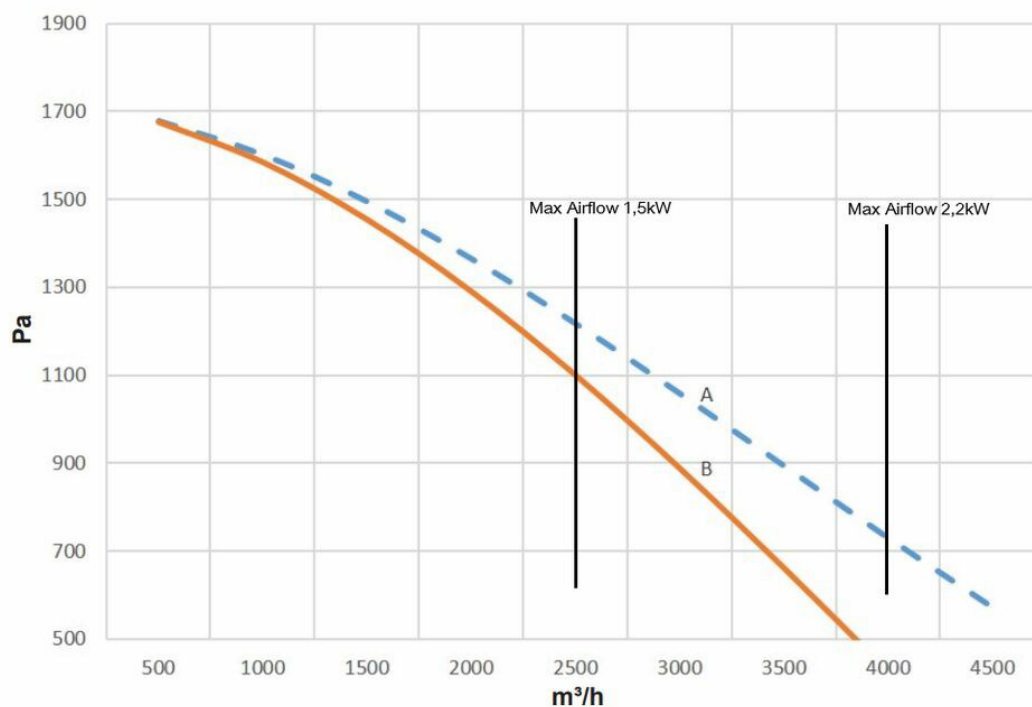

A: Total Pressure B: Static Pressure X: m³/h Y: Pa

