

Product leaflet

Exhaust Hose NTP

Thermoplastic hose



Exhaust Hose NTP

- ✓ For most normal applications.
- ✓ Temperature range: Continuous use: up to +150 °C.
- ✓ Light weight and abrasion resistant.

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.


Exhaust Hose NTP

[ProductCertifications]	[ce]
-------------------------	------

Models

	Item no	Type of hose	Diameter, hose (mm)	Hose length (m)	Weight (kg)
	20805262	NTP	100	7,5	0,8 kg/m
	20805362	NTP	100	10	0,8 kg/m
	20805562	NTP	125	7,5	0,98 kg/m
	20805662	NTP	150	5	1,16 kg/m
	20805762	NTP	150	7,5	1,16 kg/m
	20805062	NTP	75	5	0,61 kg/m
	20805162	NTP	100	5	0,8 kg/m
	20805462	NTP	125	5	0,98 kg/m



Accessories

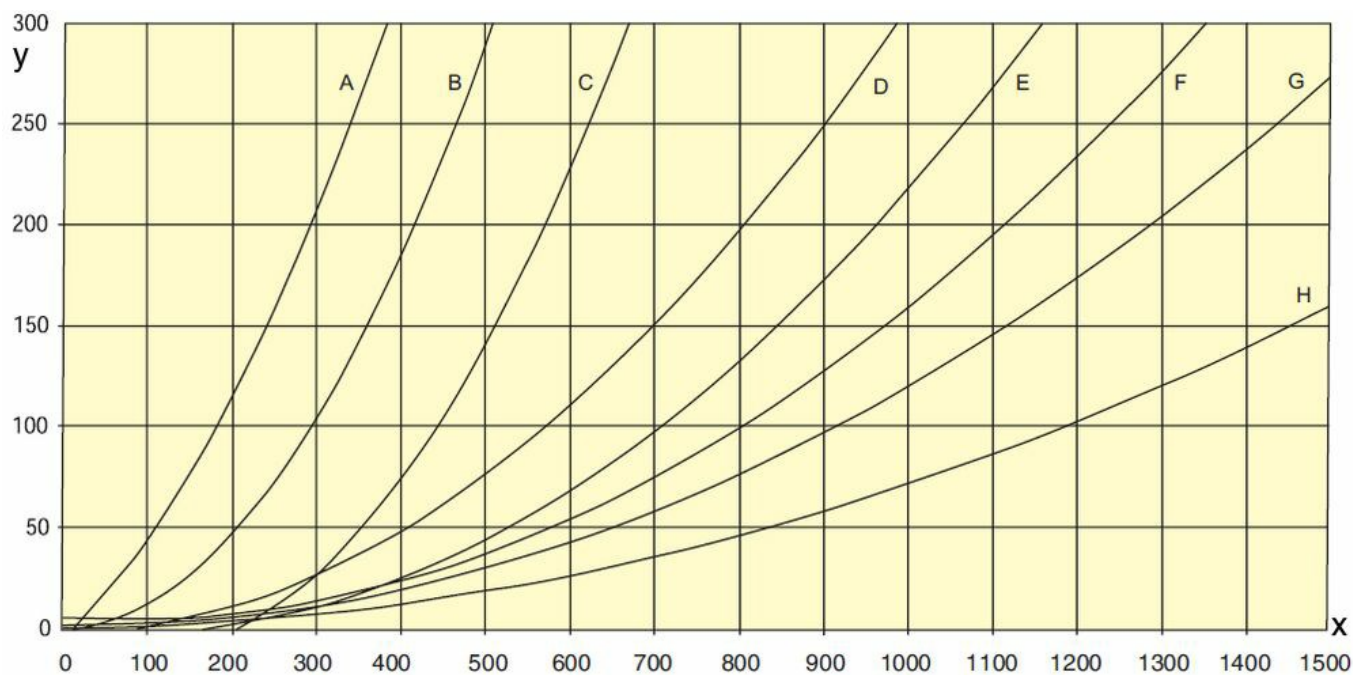
	Accessory	Item no
	Hose suspension DN 75	20373615
	Hose suspension DN 100	20373607
	Hose suspension DN 150	20373609
	Hose Suspension DN 125	20373608
	Quick coupler 100mm (2 pcs)	20374641
	Connection kit 4" for quick coupler	20375048
	Mechanical quick coupler 4", male	20375049
	Safety Coupling 6" male	20376017
	Rubber sleeve, hose clamp 3"NTP,2pc	20376474
	Rubber sleeve, hose clamp 4"NTP,2pc	20376475
	Rubber sleeve, hose clamp 5" NTP 2pc	20376382
	Rubber sleeve, hose clamp 6"NTP,2pc	20376476
	Y-pipe Ø100/100/100	20376647

Accessories

	Accessory	Item no
	Hose coupling 100 (4")	20947410
	Hose coupling 125 (5")	20948710
	Hose coupling 150 (6")	20948810
	Rubber sleeve, hose clamp Ø200	20373838
	Quick coupling D=100 (4") male	20947710
	Quick coupling D=100 (4") female	20948110
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Connection set 3"	20373286
	Connection set 4"	20373287
	Connection set 5"	20373288
	Connection set 6"	20373289
	Bend 4".	20344591

Accessories

	Accessory	Item no
	Bend 5".	20344592
	Bend 6".	20344593
	Hose suspension DN 100 - 150	20374530
	Adaptor for 3" hose	20373128
	Safety coupling 4"	20374541
	Safety coupling 6"	20374543
	Connector 6"-5". steel.	20344353
	Connector 5"-4". steel.	20344354
	Connector 4"-3". steel.	20342483
	Junction pipe d=160	20371413
	Safety coupling ø100 (4")	20373797
	Safety coupling ø150 (6")	20373798



Y = Pressure drop Pa/m X = Airflow m³/h A= Ø75 mm (3") on reel B= Ø75 mm (3") straight C= Ø100 mm (4") on reel D=Ø125 mm (5") on reel E= Ø100 mm (4") straight F= Ø150 mm (6") on reel G= Ø125 mm (5") straight H= Ø150 mm (6") straight