

Product leaflet

Exhaust Hose NFC-6.5

Extreme high temperature hose



Exhaust Hose NFC-6.5

- ✓ Asbestos- and silicon-free high-temperature fabric.
- ✓ Temperature range: Continuous use: +650 °C. Short-term use: +750 °C.

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

Exhaust Hose NFC-6.5

Certifications	CE
----------------	----

Models


	Item no	Type of hose	Diameter, hose (mm)	Hose length (m)
	20824462	NFC-6,5	150	2,5
	20824562	NFC-6,5	150	5
	20824662	NFC-6,5	200	5
	20824762	NFC-6,5	200	2,5

Accessories

	Accessory	Item no
	Rubber sleeve, hose clamp 6"NTP,2pc	20376476
	Hose coupling 150 (6")	20948810
	Hose coupling 200 (8")	20948910
	Quick coupling D=150 (6") female	20948310
	Quick coupling D=150 (6") male	20947910
	Bend 6".	20344593
	Rubber sleeve, hose clamp Ø200	20373838
	Hose suspension DN 150	20373609
	Connector 6"-5". steel.	20344353
	Junction pipe d=160	20371413
	Safety coupling ø100 (4")	20373797
	Hose Suspension DN 125	20373608
	Hose suspension DN 100	20373607

Accessories

	Accessory	Item no
	Safety coupling ø150 (6")	20373798

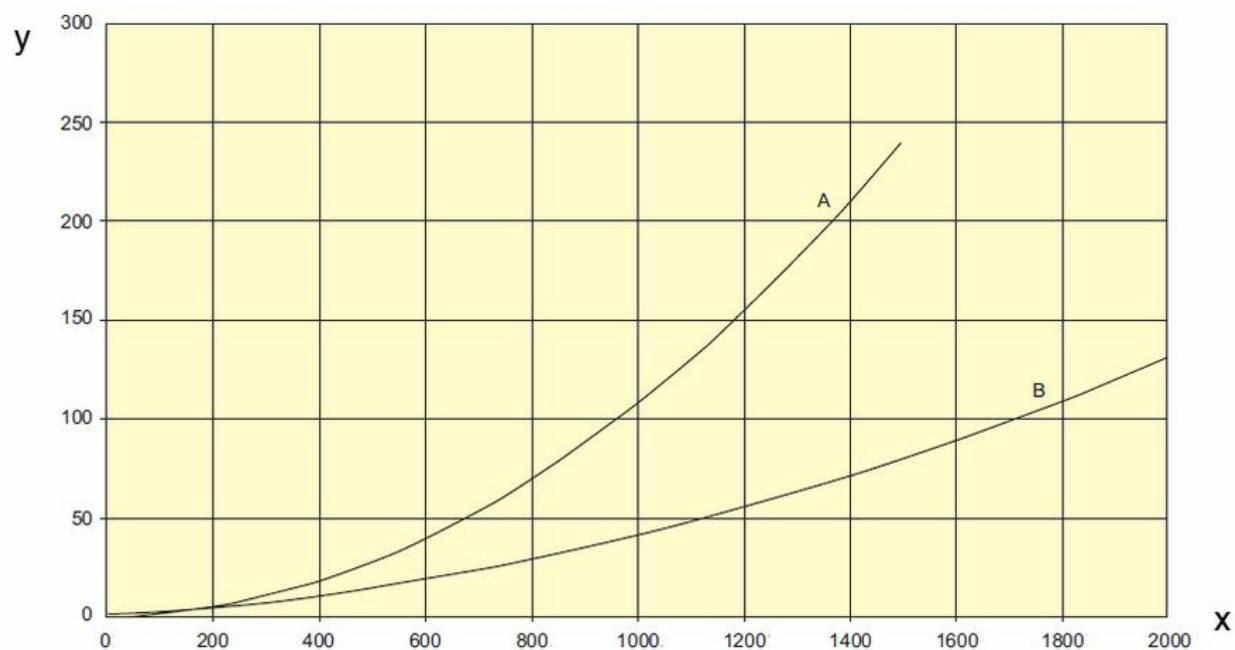

Y = Pressure drop Pa/m X = Airflow m³/h A= Ø150 mm (8") straight B= Ø200 mm (8") straight