


Product leaflet

Exhaust Hose NFC-6.5

Extreme high temperature hose

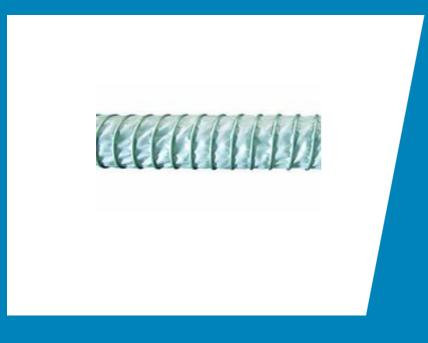

Exhaust Hose NFC-6.5

- Asbestos- and silicon-free high-temperature fabric.
- Temperature range: Continuous use: +650 °C. Short-term use: +750 °C.

Specifically designed to be flexible and ductile, and to have a very low pressure drop. They are resistant to all chemicals in diesel and petrol exhaust fumes, and show high resistance to mechanical stress.

2025-12-09 2/7

Exhaust Hose NFC-6.5

|--|

Models

Item no
89160045
89160038
89160039
89160040
89160041
89160042
89160043

2025-12-09 4/7

Accessories

Accessory	ltem no
Galv. Steel Hose Coupling Kit - 6 in (150 mm) ID with (2) sleeves and (1) strap	20948810
Galv. Steel Hose coupling Kit - 8 in (200 mm) ID with (2) sleeves and (1) strap	20948910
Female Quick Hose Coupling for NFC and NR-CP Hoses - Diameter = 6 in (150 mm)	20948310
Male Quick Hose Coupling for NFC and NR-CP Hoses - Diameter = 6 in (150 mm)	20947910
Exhaust Hose 90° Lifting Elbow with eyelet for balancer cable - Diameter = 152 mm (6 in)	20344593
Rubber cover with hose clip, Diameter = 8 in (200 mm) - Pair	20373838
Hose suspension Diameter = 6 in (150 mm)	20373609
Connector Diameter = 6 in (150mm) - Diameter = 5 in (125 mm) - Steel	20344353
Junction pipe d=160 (6.25 in)	20371413
5 in (125 mm) Clip Grip/Bridge Hose Clamp	87000932
6 in (150 mm) Clip Grip/Bridge Hose Clamp	87000835
Safety coupling Diameter = 4 in (100 mm) Accessorie for extraction unit 920.	20373797
Hose suspension Diameter = 5 in (125 mm)	20373608


2025-12-09 5/7

Nederman Exhaust Hose NFC-6.5

Accessories

Accessory	Item no
Hose suspension Diameter = 4 in (100 mm)	20373607
Safety coupling Diameter = 6 in (150 mm) Accessorie for extraction unit 920.	20373798

2025-12-09 6/7

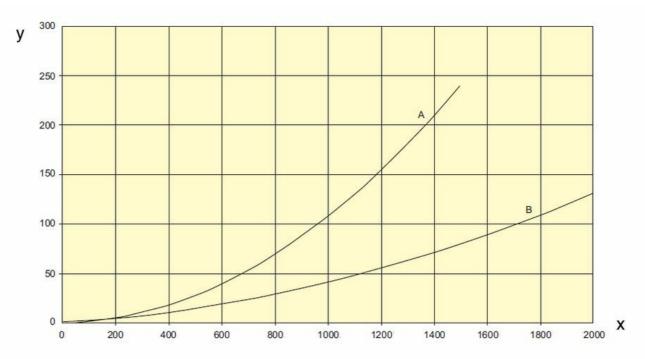

 $Y = Pressure\ drop\ Pa/m\ X = Airflow\ m3/h\ A = \varnothing 150\ mm\ (8")\ straight\ B = \varnothing 200\ mm\ (8")\ straight$