


Hose Reel 883

Retractable hose reel suitable for vehicle repair shops, garages and maintenance workshops.

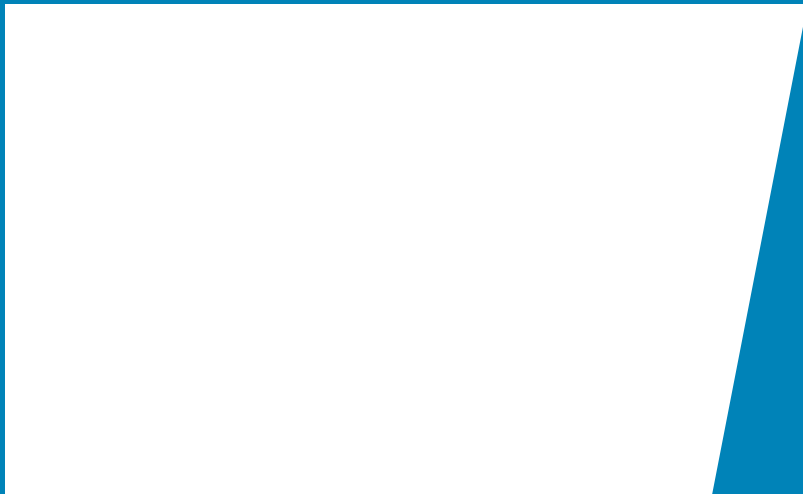

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2025-12-09

1/8

Hose Reel 883

- ✓ Spring tension easily adjustable from the outside
- ✓ Fast and easy to service

A fully plate encased and robust, medium sized retractable hose reel. A highly suitable hose reel for applications in vehicle repair and maintenance workshops. The retractable hose reel is supplied with loose quick hitch for easy installation. The hose reel 883 is retractable and has an optimized spring force, ensuring that the hose retracts smoothly and evenly onto the drum. The high quality spring is pre-tensioned at the factory to suit a wide range of applications, and is well protected inside the drum cavity. The self retracting hose reel 883 is very easy to mount, either on walls, ceilings or floors.

Nederman

Hose Reel 883










Hose Reel 883

[ProductCertifications]	[ce]
Material	Sheet metal casing
[ProductMaterialrecycling]	100
[ProductMedia]	Compressed air, Water, Water high pressure, Oil, [grease]
[ProductConnectionHoseLength]	1
Weight (kg)	15
Corrosion resistance	Standard
Electric/Spring driven	Spring

Nederman

Hose Reel 883

Models

	Item no	Type of hose	Media	Delivered with hose	Colour	Max working pressure (Mpa)	Max hose length	Distribution hose diameter (mm)
	30800783 ^[1]	Without	Compressed air, Water	[Without]	Black	1,5	15	
	30800983 ^[2]	Without	Compressed air, Water	[Without]	Black	1,5	10	12,5
	30801083	B	Compressed air, Water	[With]	Black	1,5		12,5
	30801183 ^[2]	Without	Compressed air, Water, Oil	[Without]	Black	7,5	10	12,5
	30801383 ^[3]	Without	[grease]	[Without]	Black	35	15	6
	30802183 ^[4]	Without	Water high pressure	[Without]	Black	25	13	10
	30802283	G	Water high pressure	[With]	Black	25		10
	30803883	G	Water high pressure	[With]	White	25		10
	30803783 ^[4]	Without	Water high pressure	[Without]	White	25	13	10










	Item no	Type of hose	Media	Delivered with hose	Colour	Max working pressure (Mpa)	Max hose length	Distribution hose diameter (mm)
	30801283	I	Oil	[With]	Black	7,5		12,5
	30806183	Without	Oil	[Without]	White	7,5	10	12,5
	30806283	I	Compressed air, Water, Oil	[With]	White	7,5		12,5
	30801883	J	[grease]	[With]	Black	35		6

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Nederman

Hose Reel 883

Models











	Item no	Type of hose	Media	Delivered with hose	Colour	Max working pressure (Mpa)	Max hose length	Distribution hose diameter (mm)
	30807283	B	Compressed air, Water	[With]	White	1,5		10
	30851683	B	Compressed air, Water	[With]	White	1,5		12,5
	30825283	G	[grease]	[With]	White	35		6
	30825483	G	[grease]	[With]	White	25		10
	30803283	I	Compressed air, Water, Oil	[With]	Grey	7,5		12,5
	30806083	J	[grease]	[With]	Grey	35		10
	30815483 ^[2]	B	Compressed air, Water	[With]	Grey	1,5		10
	30809783 ^[5]	Q	[alcoholethanol]	[With]	Grey	1,5		10
	30809683 ^[5]	Q	[alcoholethanol]	[With]	Black	1,5		10
	30800883	B	Compressed air, Water	[With]	Black	1,5		10

^[1] For 10 mm hose (connection hose 12.5 mm)
^[2] For 12,5 mm hose
^[3] For 6 mm hose
^[4] For 10 mm hose
^[5] Hose couplings are 12mm (1/2")




Hose types

Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
B	Cover in NBR/PVC and inner tube in NBR. Synthetic textile braid	-30 - 100	Male, chrome plated		Hose nipple + clip	Hose nipple 1/2" + clip
G	Cover and inner tube in synthetic rubber. Single steel braid	-40 - 155	Female 60° cone, chrome plated. With rubber hose grip	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
I	Cover and inner tube in SBR based rubber. Single steel braid	-40 - 100	Female 60° cone, chrome plated	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
J	Cover and inner tube in syntetic, oil resistant rubber. Double steel braid	-40 - 100	Female 60° cone, chrome plated	Female 60° cone, chrome plated	Male 60° cone	Male 60° cone
Q	Cover in polyurethane and inner tube seamless polyamide. Singel steed braid.	-40 - 70	Female 60° cone, stainless steel	Female 60° cone, stainless steel	Male 60° cone	Male 60° cone

Accessories

	Accessory	Item no
	Roller guide.	30341550
	Pivoting bracket.	30372407
	Water gun in chromium plated brass. Max. temperature 95°C	30400110
	Water gun in stainless steel 316. Max. temperature 95°C	30400210
	Watergun EX	30400211
	Water gun in stainless steel 316. Max. temperature 95°C	30400310
	Air gun, standard.	30410110
	Swivelling coupling 3/8(m)-3/8(m)HP	30431310
	Swivelling coupling 3/8(m)-3/8(m)HP	30431410
	Swivl. coupl.1/2(m)-3/8(f) brass	30431510

Accessories

	Accessory	Item no
	Swivl.coupl.1/2(m)-1/2(f) brass	30431610
	Swivel coupling 1/2(m)- 3/4 (f) bra	30431710
	Swivl. coupl. 1/2(m)-3/8(f) SS	30431810
	Swivl coupl. 1/2(m)-1/2(f) SS	30431910
	Swivl.coupl.1/2(m)-3/4(f) SS	30432010
	Inlet kit for hose reel 1/2"	30511550
	Inlet kit for hose reel 3/8" with ball valve 3/8", 3/8"-3/8" adapter and 1/4" - 3/8" adapter.	30511650

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

