

ALU 150/250

Hareket halindeki araçlar için gelişmiş bir egzoz çekme sistemi



ALU 150/250

- ✓ Yüksek kaliteye sahip bileşenler.
- ✓ İki standart raylı boyutta.
- ✓ Ekstraksiyon üniteleri için komple aksesuar programı
- ✓ Large airflow

ALU 150/250, muayene merkezlerinin ve araç üreticilerinin ihtiyaçlarını karşılamayı amaçlayan, sık ve yoğun kullanıma uygun, gelişmiş bir egzoz rayı sistemidir. ALU 150/ 250, çekme ünitelerinin otomatik olarak ayrı bir hatta geri döndürülmesi (bkz. AKU AKIŞ HATTI), nozulların otomatik olarak çıkarılması ve motorlu hortum ceraskalları gibi pek çok özellekle donatılmıştır, kullanıcının yapması gereken tek şey nozulları bağlamaktır. Emme rayına otomatik geri dönüşle yapılan kombinasyonlar, aynı anda sadece bir araca servis uygulanabilen ağır taşıt tesislerinde de kullanılabilir. Not! Düz raylı çözüm tercih edildiğinde, ray sisteminin ucuna hidrolik bir limit stoperi takılmalıdır.

ALU 150/250

Sertifikalar	CE
--------------	----

Models

	Item number	Kol uzunluđu (m)	Hortum tipi	Hortum Bađlantı ölçüsü (mm)	Hortum uzunluđu (m)
	20900510 ^[1]	0			
	20900610 ^[1]	0			
	20900710 ^[1]	0			
	20900810 ^[1]	0			
	20900910 ^[1]	0			
	20901010 ^[1]	0			
	20901110 ^[1]	0			
	20901210 ^[1]	0			
	20901310 ^[1]	0			
	20901410 ^[1]	0			
	20901510 ^[1]	0			
	20901610 ^[1]	0			
	20901710 ^[1]	0			

Models

	Item number	Kol uzunluđu (m)	Hortum tipi	Hortum Bađlantı ölçüsü (mm)	Hortum uzunluđu (m)
	20901810 ^[1]	0			
	20901910 ^[1]	0			
	20902010 ^[1]	0			
	20950010 ^[2]				
	20950110 ^[3]				
	20950210 ^[4]				
	20950310 ^[5]				
	20950410 ^[6]				
	20950510 ^[7]				
	20950610 ^[8]				
	20950710 ^[9]				
	20950810 ^[10]				
	20950910 ^[11]				

Models

	Item number	Kol uzunluğu (m)	Hortum tipi	Hortum Bağlantı ölçüsü (mm)	Hortum uzunluğu (m)
	20951010 ^[12]				
	20951110 ^[13]				
	20951210 ^[14]				
	20951310 ^[15]				
	20951410 ^[16]				
	20951510 ^[17]				
	20900310 ^[18]	0	NR-CP	100	5
	20900410 ^[18]	0	NR-CP	150	5
	20902610 ^[18]	0	NR-CP	150	7,5
	20902710 ^[18]	0	NR-CP	150	7,5

^[1] Düz egzoz rayı ALU 150, süspansiyon braketleri dahildir. Uzunluklar > 50 m için lütfen Nederman bayiniz ile irtibata geçiniz.

^[2] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 2 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 2,5m, fasteners for rail assembly.

^[3] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 3 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 5m, fasteners for rail assembly.

^[4] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 3 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 7,5m, kit connections and fasteners for rail assembly.

^[5] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 3 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 10m, kit connections and fasteners for rail assembly.

^[6] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 4 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 12,5m, kit connections and fasteners for rail assembly.

^[7] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 4 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 15m, kit connections and fasteners for rail assembly.

^[8] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 5 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 17,5m, kit connections and fasteners for rail assembly.

^[9] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 5 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 20m, kit connections and fasteners for rail assembly.

^[10] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 6 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 22,5m, kit connections and fasteners for rail assembly.

^[11] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 6 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 25m, kit connections and fasteners for rail assembly.

^[12] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 7 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 27,5m, kit connections and fasteners for rail assembly.

^[13] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 7 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 30m, kit connections and fasteners for rail assembly.

^[14] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 8 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 35m, kit connections and fasteners for rail assembly.

^[15] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 9 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 40m, kit connections and fasteners for rail assembly.

^[16] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 10 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 45m, kit connections and fasteners for rail assembly.

^[17] Straight exhaust rail ALU 250 incl. suspension brackets. Ceiling Support 11 pcs., lid 2 pcs., end stop 2 pcs., rubber moulding 50m, kit connections and fasteners for rail assembly.


^[18] Trolley, dengeleyici, egzoz hortumu ve nozulu ile birlikte teslim edilir.

Accessories


	Accessory	Item number
	Bağlantı kesme rayı ALU 150/250	20940810
	ALU150/250 için Hidrolik limit durdurucu	20941410
	Braket için süspansiyon adaptörü 5 parça	20940110
	duvar desteği 600mm	20947510
	ALU150/250 10 için dahili destek	20941110
	Raylı kızak	20373942
	Egzoz trolleyi maksimum	20940310
	Duman ekstraktörü için Egzoz trolleyi	20940210
	Dengeleyici standart trolley için tutucu	20941310
	Dengeleyici maksimum için destek	20941210
	emiş trolley ALU150 standart ø150	20943210
	dış trolley ALU150 ø150 standart damper	20943410
	Raylı emiş trolley makarası	20948610

Accessories


	Accessory	Item number
	Uç bağlantısı ALU150 hortumlu	20816264
	Extractor side ALU 250 Ø250 with hose	20377374
	Kit connection ALU 250	20377371
	Extractor top side Ø250 with hose	20377373
	Extractor top Ø250 W/hose	20377372
	Bağlantı parçası ALU150 kit	20373413
	Ceiling Support bracket 5pcs, ALU250	20377370

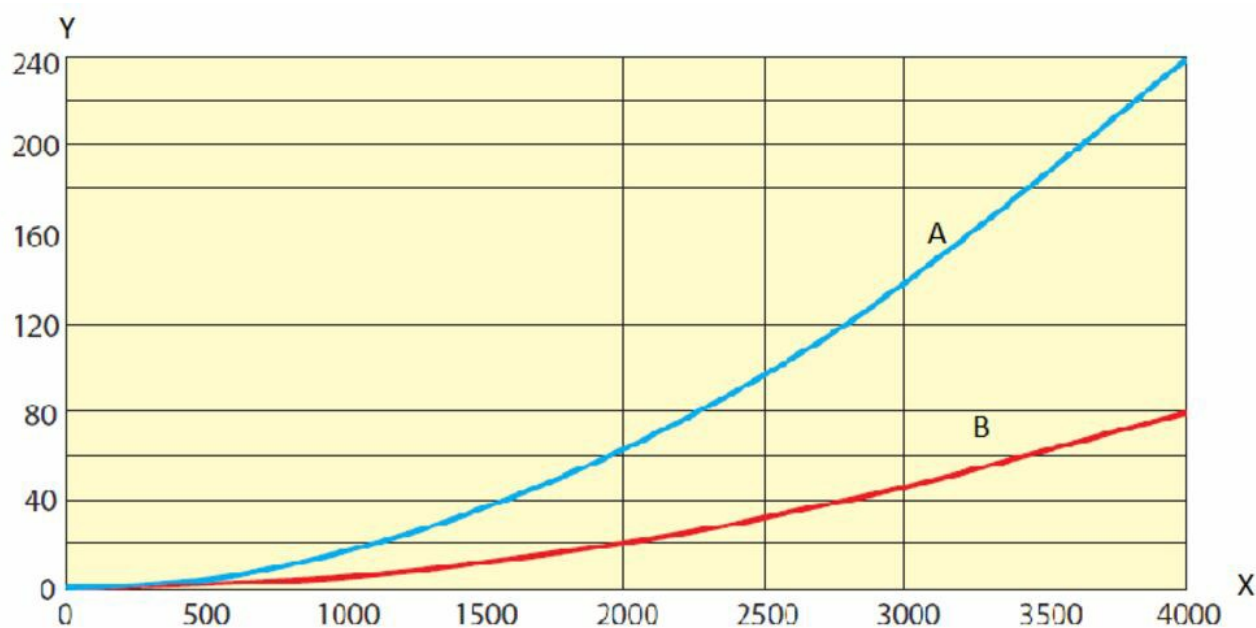

Y = Pressure drop (Pa), X = air flow (m³/h) A = ALU Ø150 mm B = ALU Ø250 mm

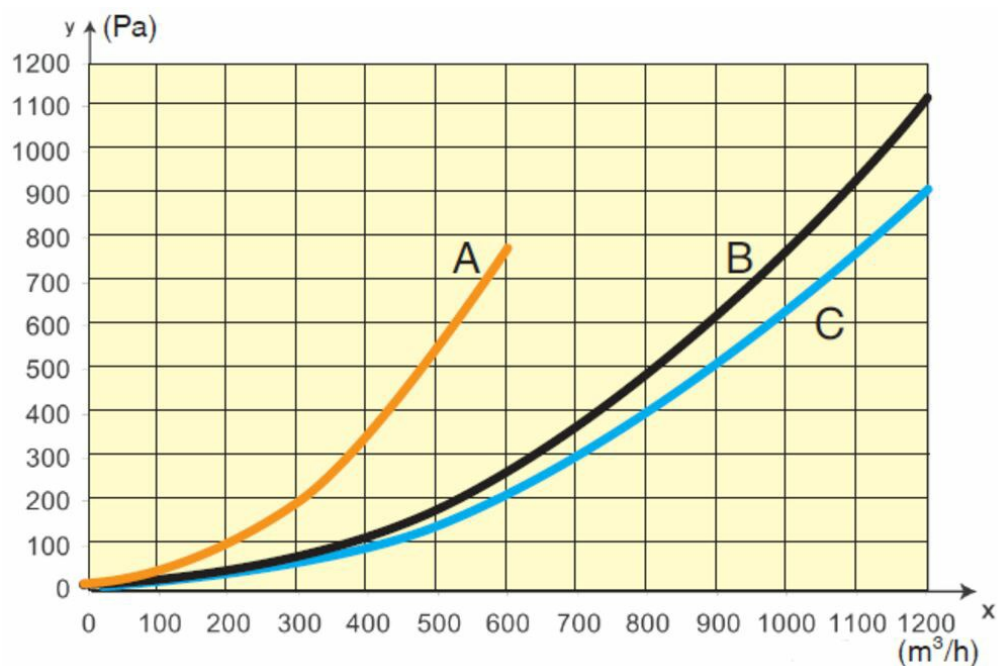

Pressure drop extraction units with A = hose Ø100 mm, 5 m B = hose Ø150 mm, 7.5 m C = hose Ø150 mm, 5 m

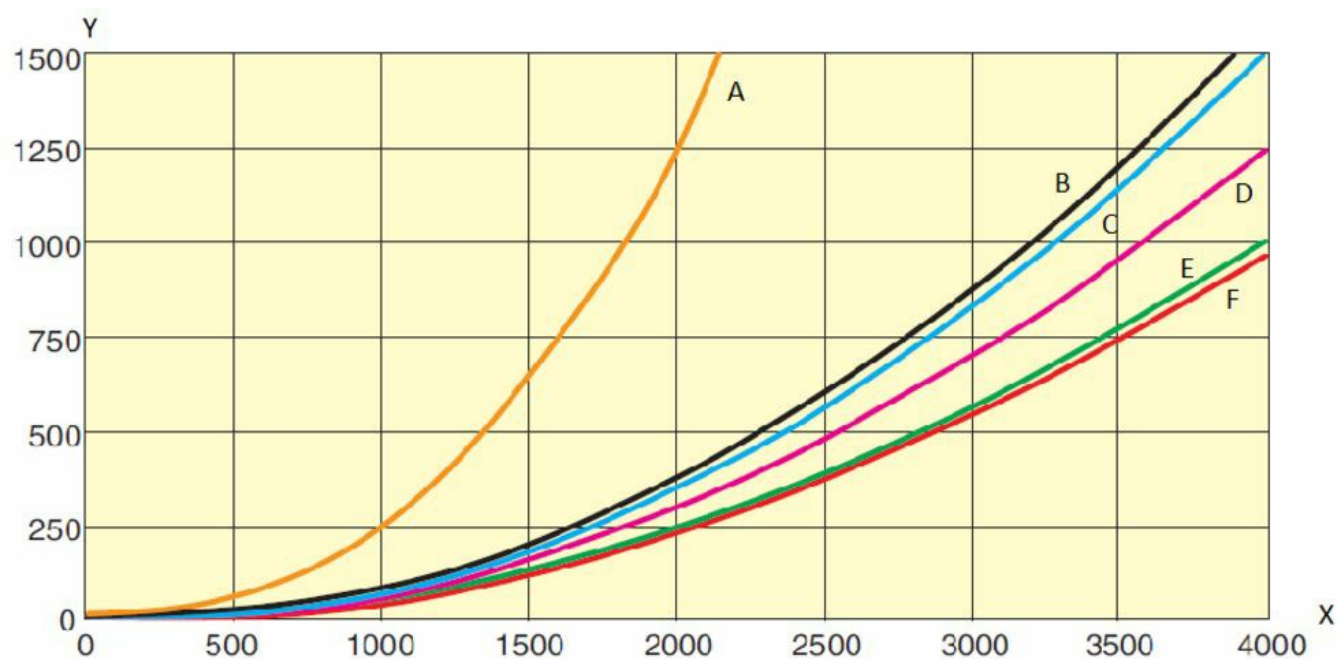

Y= Pressure drop (Pa), X= air flow (m³/h) A = Trolley fume extractor arm B = Top Outlet - side Ø250 C = Maxi Trolley Ø200 without hose D = Rail end outlet ALU 250 / Ø250 E = Top outlet Ø250 F = Rail end outlet ALU 150 / Ø250