

600A

Stationary multi-purpose dust collector



This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

2025-12-09

1/6

600A

- ✓ Vacuum unit with silo on flexible frame system
- ✓ High vacuum for suction of heavyweight material over long distance

Silo system with high suction capacity for fixed installations. Designed for the collection of dusty materials such as granules, steel grit and recovery of precious metals. The silo is equipped with a manual discharge valve. Can be supplied with counterweight or pneumatic valves for automatic operations. Equipped with the efficient and self-cleaning NCF (candle) filter (not all models). The unit can be fitted with automatic remote control. The unit is often used as power pack in central suction systems

Nederman

600A



600A

[ProductCertifications]	[ce]
[ProductInstallation]	[Outdoor], [Indoor]
Filter cleaning method	[ReverseAirPulse]
[ProductApplication]	[dust], [granulate], [grit], [swarf]
Dustbin volume (l)	146
Filter type	[NCF]
Number of filter elements	70
Weight (kg)	144

Nederman

600A

Models




	Item no	Type of hose	Max airflow (m³/h)	Max vacuum (kPa)	Hose length (m)	Hose diameter (mm)	Delivered with hose
	42160000 ^[1]	PU12	330	-68	10	63	
	42160081	Without	690	-48			[Without]

^[1] With cleaning set, gulper head and scraping tool

Hose types



Hose type	[HoseSpecification]	[HoseTemperatureRange]	[HoseFittingDistribution]	[HoseFittingInlet]	[HoseConnectionDistribution]	[HoseConnectionInlet]
PU12	Sturdy hose. Suitable for abrasive material Transparent polyurethane (t=1,2 mm) Reinforced with inbedded steel helix	- 40 deg. C. - + 90 Deg. C.				

Accessories

	Accessory	Item no
	Control S for NE 22-76	43220001
	Control S for NE 22-76, wo/control box	43220026
	Control S for NE86-96, wo/control box	43222008

Nederman

600A

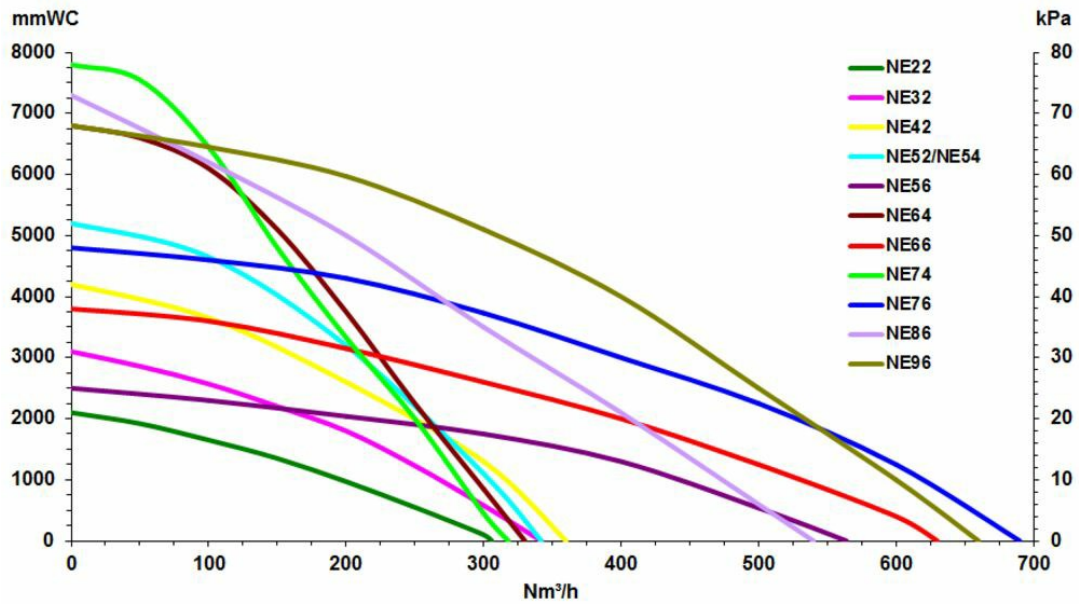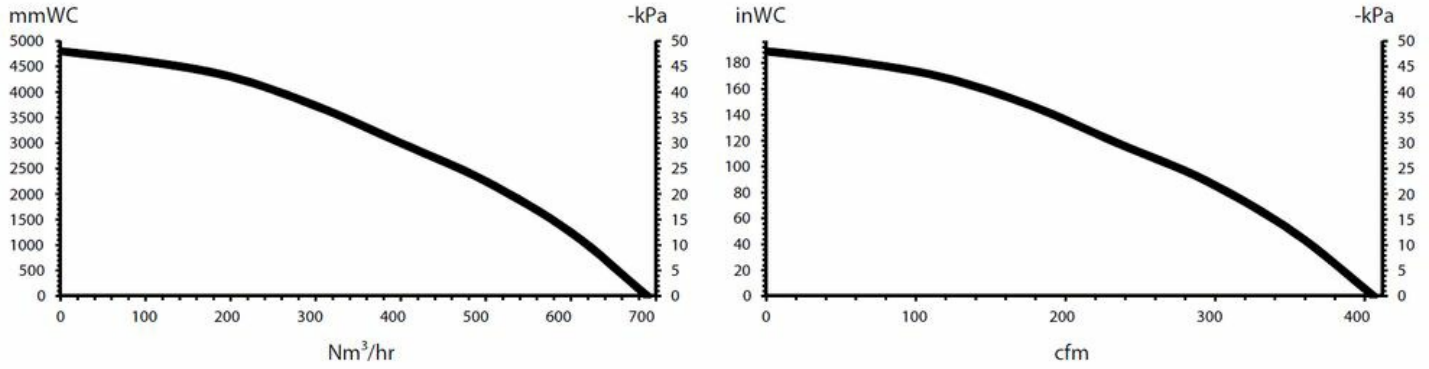

Air Powered ejectors All performance data are based on 7 bar supply pressure