

Product leaflet

106 A

Industrial vacuum cleaner for removal of non-flammable liquids and granules



106 A

- Comes with NE 32 powerhead
- Wet & Dry cleaning
- Vacuuming capacity
- Easy handling
- Bottom discharge optional

A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container is mounted to the trolley by brackets.

106 A

Sertifiseringer	CE
Filtertype	Stavfilter
Antall filterelementer	1
Filtermateriale	Polyester-teflon
Slangetype	PVC
[ItemCompressedAirRequirement]	1,6 Nm3/min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	74.0
[ItemMaxVaccum]	-31
[ItemHVHoseLength]	7,5
[ItemHVHoseDiameter]	51

Models

	Item number
Management of the Control of the Con	42110600 ^[1]


 $^{^{[1]}\,\}mathrm{Med}\,\mathrm{rengj}\mathrm{\o}\mathrm{gringssett},\!\mathrm{b}\mathrm{\o}\mathrm{grste},\!\mathrm{konisk}\,\mathrm{og}\,\mathrm{tannet}\,\mathrm{munnstykke}$

Hose types

Slangetype	Spesifikasjon	Temperaturområde (°C)	Endekobling, distribusjonsslange	Endekobling, innløpsslange	Slangetilkobling på trommel, distribusjonsslange	Slangetilkobling på trommel, innløpsslange
PVC	Maks vakuum -84kPa. Indre bøyeradius 60mm. Forsterket med innstøpt stålspiral.	- 20 deg. C. to + 70 Deg. C.				

Accessories

	Accessory	Item number
o'p	Kontroll Sfor NE 22-76	43220001
	Kontroll Sfor NE 22-76	43220026
	Kontroll Sfor NE86-96	43222008

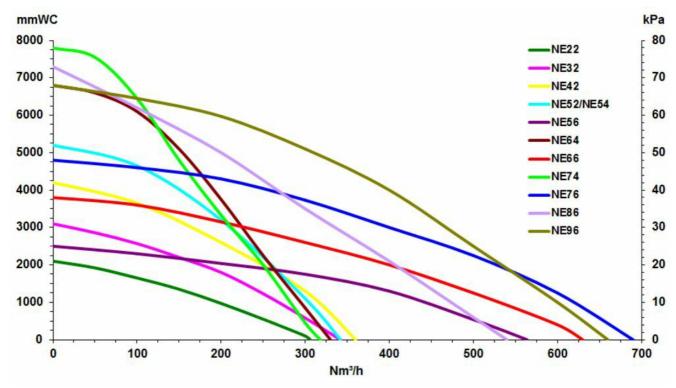

Air Powered ejectors All performance data are based on 7 bar supply pressure