

Industristøvsuger 116A

Industristøvsuger til fjernelse af ikke-brændbare væsker og granulat



Industristøvsuger 116A

- ✓ Comes with NE 52 powerhead
- ✓ Wet & Dry cleaning
- ✓ Vacuuming capacity
- ✓ Easy handling
- ✓ Tippable trolley; Bottom discharge optional

A high capacity vacuum unit for suction and transportation of various non-flammable liquids like oil, chemicals, mud, cooling liquids and water, as well as metal chips, sand, and other granules. The standard version vacuum unit can fill the container with liquids in a minute or two. Suction equipment is made for heavy duty work. The container can be tipped for ease of emptying.

Industristøvsuger 116A

Cerifikat	CE
Type af filter	Filterpose
Antal filter	1
Slangetype	PVC
Trykluftbehov	3,0 Nm ³ /min
Maks. luftmængde (m ³ /h)	342
Lydniveau (dB(A))	75,5
Max vakuum (kPa)	-52
Vægt (kg)	51
Slangelængde (m)	7,5
[ItemHVBHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Modeller


	Item number
	42111600 ^[1]
	42111607 ^[1]

^[1] Med rengøringssæt, børste, konisk og tandet mundstykke

Slangetype

Slangetype	Specifikation	Temperaturområde, °C	Slangekobling, fri ende distributionsslange	Slangekobling, fri ende tilslutningsslange	Slangtilslutning, distributionsslange	Slangekobling, tilslutningsslange
PVC	Max vakuum 84 kPA. Indre bøjningsradius 60 mm. Forstærket med indlagt stål helix	- 20 deg. C. to + 70 Deg. C.				

	Accessory	Item number
	Styring S for NE 22-76	43220001
	Styring S for NE 22-76, uden kontrolboks	43220026
	Styring S for NE86-96, uden kontrolboks	43222008

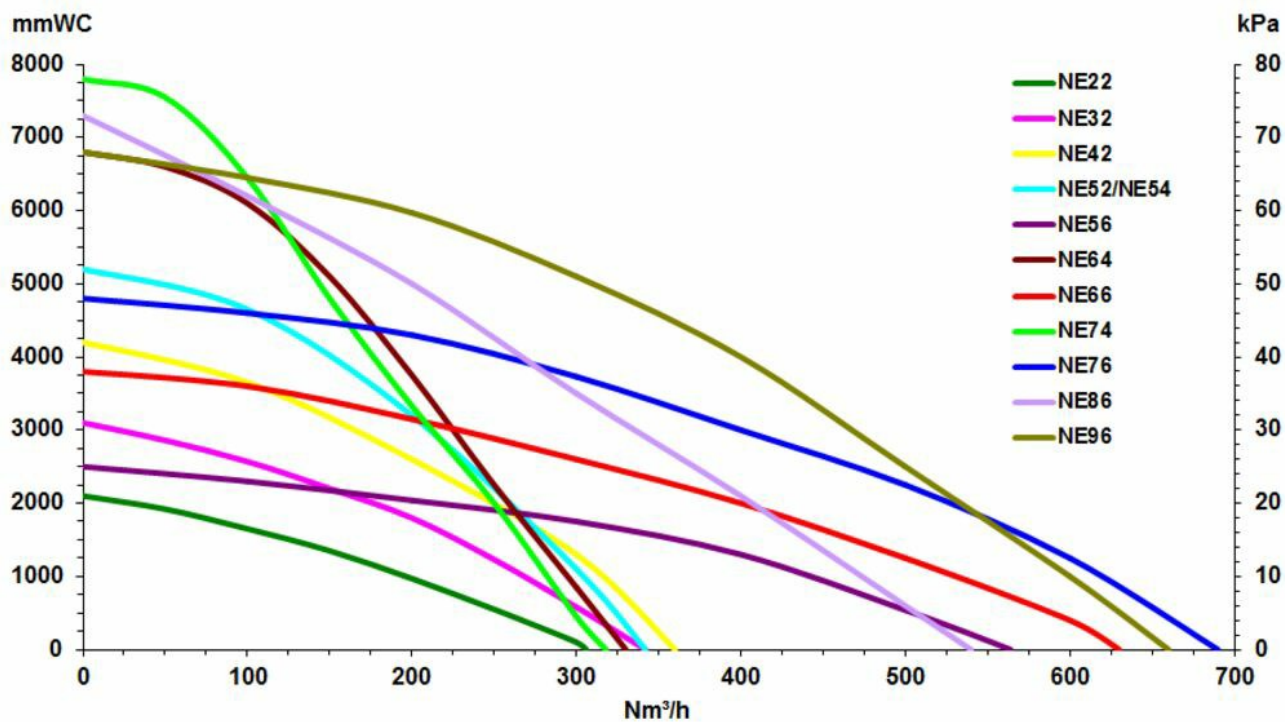

Air Powered ejectors All performance data are based on 7 bar supply pressure