

Industristøvsuger 425A

Industrial vacuum cleaner for removal of industrial waste



Industristøvsuger 425A

- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

Industristøvsuger 425A

Cerifikat	CE
Type af filter	Filterpatron
Antal filter	1
Slangetype	PVC
Trykluftbehov	3,0 Nm ³ /min
Maks. luftmængde (m ³ /h)	342
Lydniveau (dB(A))	75,5
Max vakuum (kPa)	-52
Vægt (kg)	119
Slangelængde (m)	7,5
[ItemHVHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Modeller

	Item number
	42142500

Slangetype


Slangetype	Specifikation	Temperaturområde, °C	Slangekobling, fri ende distributionsslange	Slangekobling, fri ende tilslutningsslange	Slangtilslutning, distributionsslange	Slangekobling, tilslutningsslange
PVC	Max vakuum 84 kPA. Indre bøjningsradius 60 mm. Forstærket med indlagt stål helix	- 20 deg. C. to + 70 Deg. C.				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Tilbehør

	Accessory	Item number
	Styring S for NE86-96, uden kontrolboks	43222008
	Styring S for NE 22-76, uden kontrolboks	43220026
	Styring S for NE 22-76	43220001

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

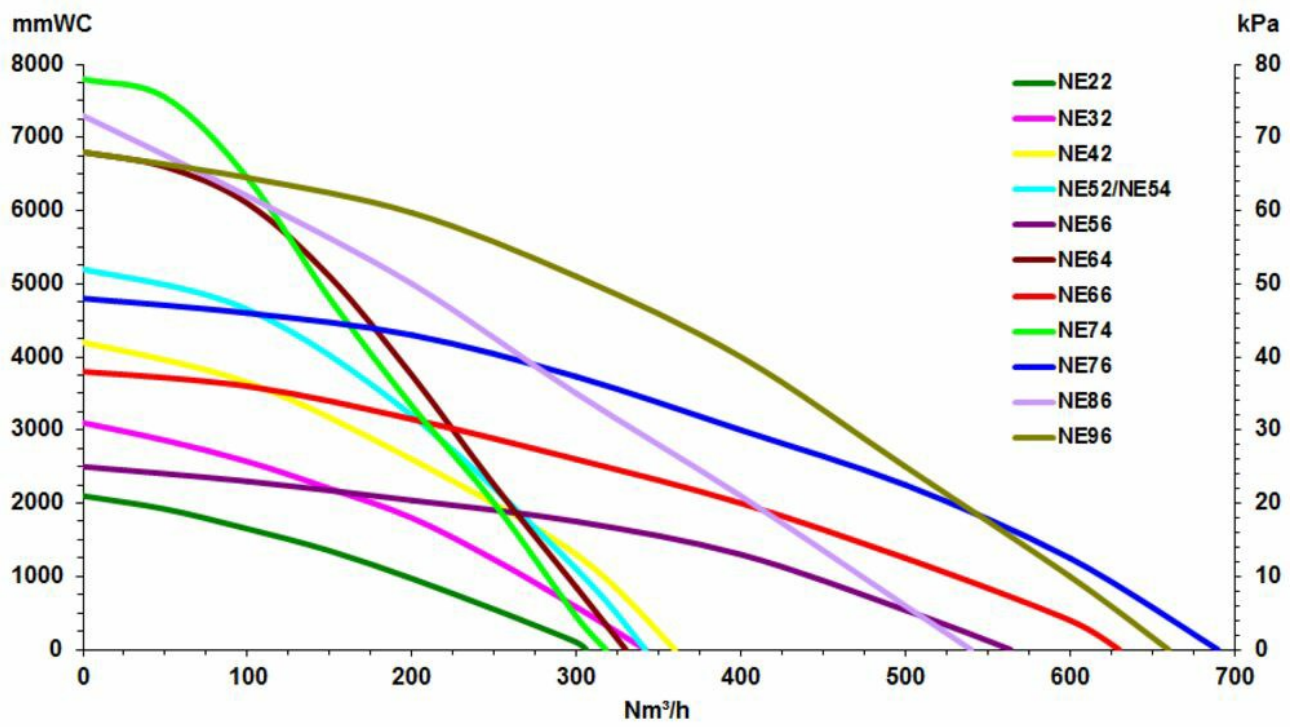

Air Powered ejectors All performance data are based on 7 bar supply pressure