

# 425A

Industrial vacuum cleaner for removal of industrial waste



## 425A



- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

# 425A

Certificaciones	CE
Tipo de filtro	Cartucho
Número de elementos filtrantes	1
Tipo de manguera	PVC
[ItemCompressedAirRequirement]	3,0 Nm3/min
[ItemMaxAirFlow]	342
[ItemNoiselevel]	75,5
[ItemMaxVaccum]	-52
Peso (kg)	119
[ItemHVBHoseLength]	7,5
[ItemHVBHoseDiameter]	51




# Models


	Item number
 	42142500

# Hose types

Tipo de manguera	Especificación	Rango de temperatura, °C	Acoplamientos de manguera ene extremos libre, manguera de distribución	Acoplamientos de manguera ene extremos libre, manguera de entrada	Manguera de conexión en enrollador, manguera de distribución	Manguera de conexión en enrollador, manguera de entrada
PVC	Máximo vacío 84kPa. Radio de curvatura interior 60mm. Reforzada con hélice de acero embebida.	- 20 deg. C. to + 70 Deg. C.				

# Accessories

	Accessory	Item number
	Control S para NE86-96, sin caja de control	43222008
	Control S para NE 22-76, sin caja de control	43220026
	Control S para NE 22-76	43220001

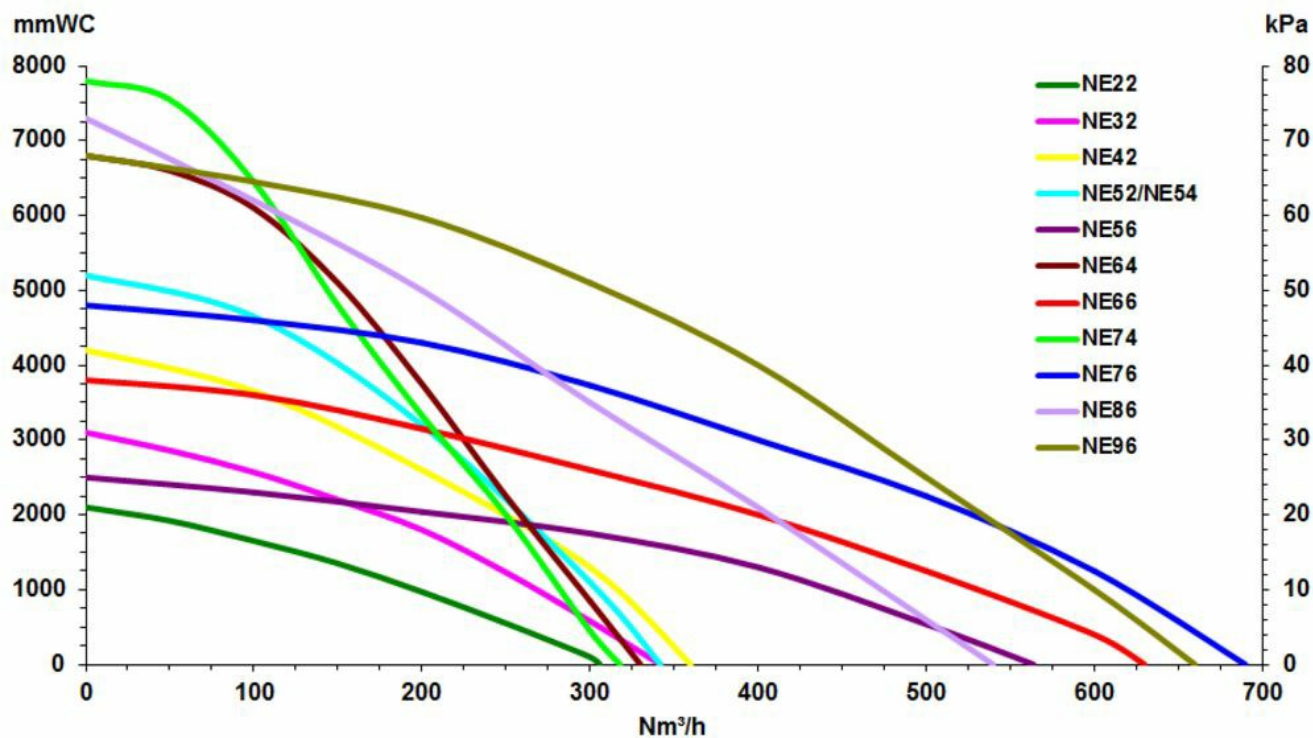

Air Powered ejectors All performance data are based on 7 bar supply pressure