

425A

Industrial vacuum cleaner for removal of industrial waste



425A

- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

425A

Cerifikat	CE
Typ av filter	Patron
Antal filter	1
Slangtyp	PVC
Tryckluftsbehov	3,0 Nm ³ /min
Max luftflöde (m ³ /h)	342
Ljudnivå (dB(A))	75,5
Max vaccum (kPa)	-52
Vikt (kg)	119
Slanglängd (m)	7,5
Slangdimension (mm)	51

Modeller


	Art.nr
	42142500

Slangtyper

Slangtyp	Specifikation	Temperatur område, °C	Slangkoppling, fri ände distributionsslang	Slangkoppling, fri ände anslutningsslang	Slanganslutning på upprullare, distributionsslang	Slangkoppling på upprullare, anslutningsslang
PVC	Max vacuum 84 kPA Inre krökningsradie 60 mm Förstärkt med helinbäddad stålspiral	- 20 deg. C. to + 70 Deg. C.				

Tillbehör

	Tillbehör	Art.nr
	Kontrollsystem för NE86-96 utan kontrollbox	43222008
	Kontrollsystem för NE 22-76, utan kontrolbox	43220026
	Kontrollsystem för ejektor NE 22-76	43220001

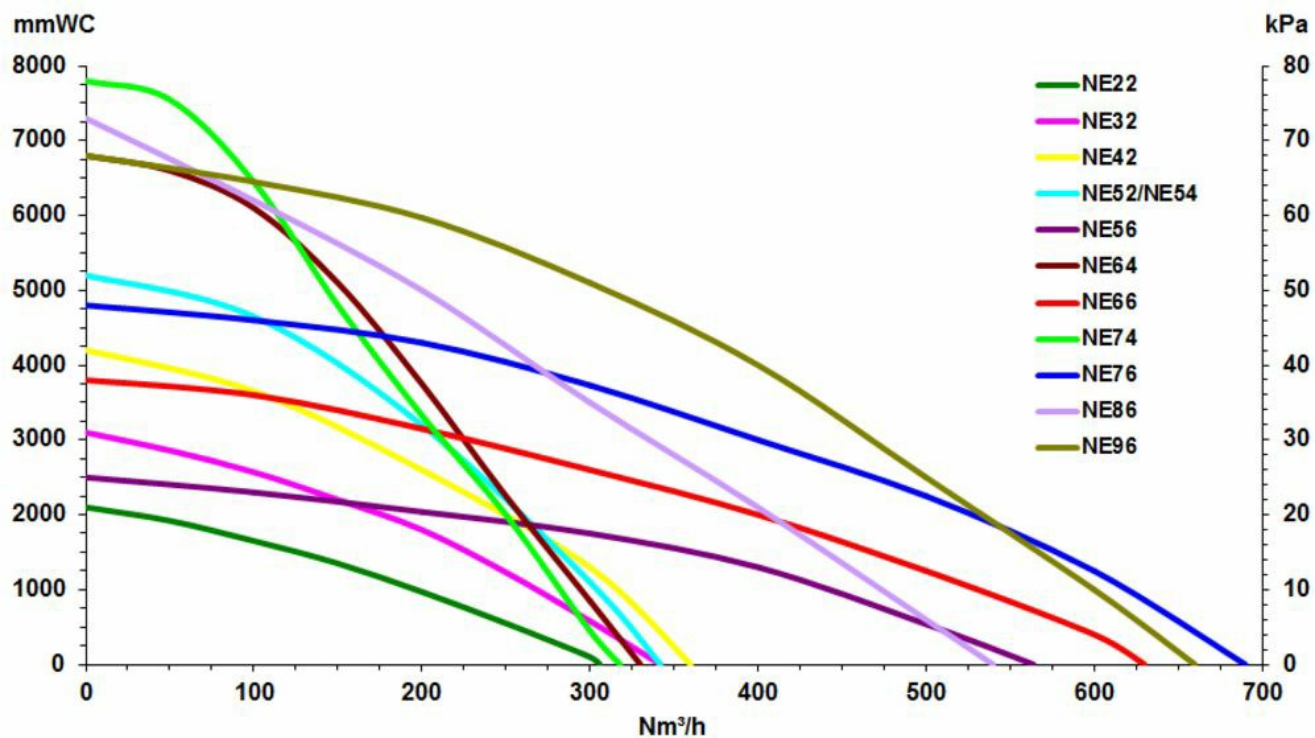

Air Powered ejectors All performance data are based on 7 bar supply pressure