

# 425A

Industrial vacuum cleaner for removal of industrial waste



## 425A


- ✓ Dry waste suction
- ✓ Silo pre-separator with manual outlet valve
- ✓ Fork lift handling
- ✓ Sturdy trolley system with large wheels for uneven ground
- ✓ automatic filtercleaning

Dual container system, designed for removal of industrial waste. This powerful suction unit comes equipped with a silo and filter container fitted with our exclusive nederman vyon self-cleaning filter ensuring the efficient filtration of large quantities of dust. The filter is cleaned automatically when the air supply is turned off. Special swivelling, locking wheels are sized to increase mobility, and make the handling of heavy loads especially simple. The unit is equipped with an adjustable counterweight valve and sack holder for discharge into sacks. The model include slots for handling by forklift.

## 425A

|                                |                          |
|--------------------------------|--------------------------|
| Sertifikalar                   | CE                       |
| Filtre türü                    | [cartridge]              |
| Filtre adedi                   | 1                        |
| Hortum tipi                    | PVC                      |
| [ItemCompressedAirRequirement] | 3,0 Nm <sup>3</sup> /min |
| [ItemMaxAirFlow]               | 342                      |
| [ItemNoiselevel]               | 75,5                     |
| [ItemMaxVaccum]                | -52                      |
| Ağırlık (kg)                   | 119                      |
| [ItemHVBHoseLength]            | 7,5                      |
| [ItemHVBHoseDiameter]          | 51                       |

## Models


|   | Item number |
|---|-------------|
|  | 42142500    |

## Hose types

| Hortum tipi | Özellikler  | Isı aralığı °C               | Hortum bağlantısız uç, dağıtım hortumu | Hortum bağlantısız uç, hortum girişi | Hortum bağlantısı sarma mekanizması üzerinde, dağıtım hortumu | Hortum bağlantısı sarma mekanizması üzerinde, hortum girişi |
|-------------|---|------------------------------|--|--------------------------------------|---|---|
| PVC         | Max vakum 84 kPa yarıçapı 60mm gömülü çelik helis ile güçlendirilmiştir | - 20 deg. C. to + 70 Deg. C. |  |                                      |   |   |

## Accessories

|   | Accessory                                | Item number |
|---|--|-------------|
|  | NE86-96 için kontrol S, kontrol kutusuz  | 43222008    |
|  | NE 22-76 için kontrol S, kontrol kutusuz | 43220026    |
|  | NE 22-76 için kontrol S                  | 43220001    |

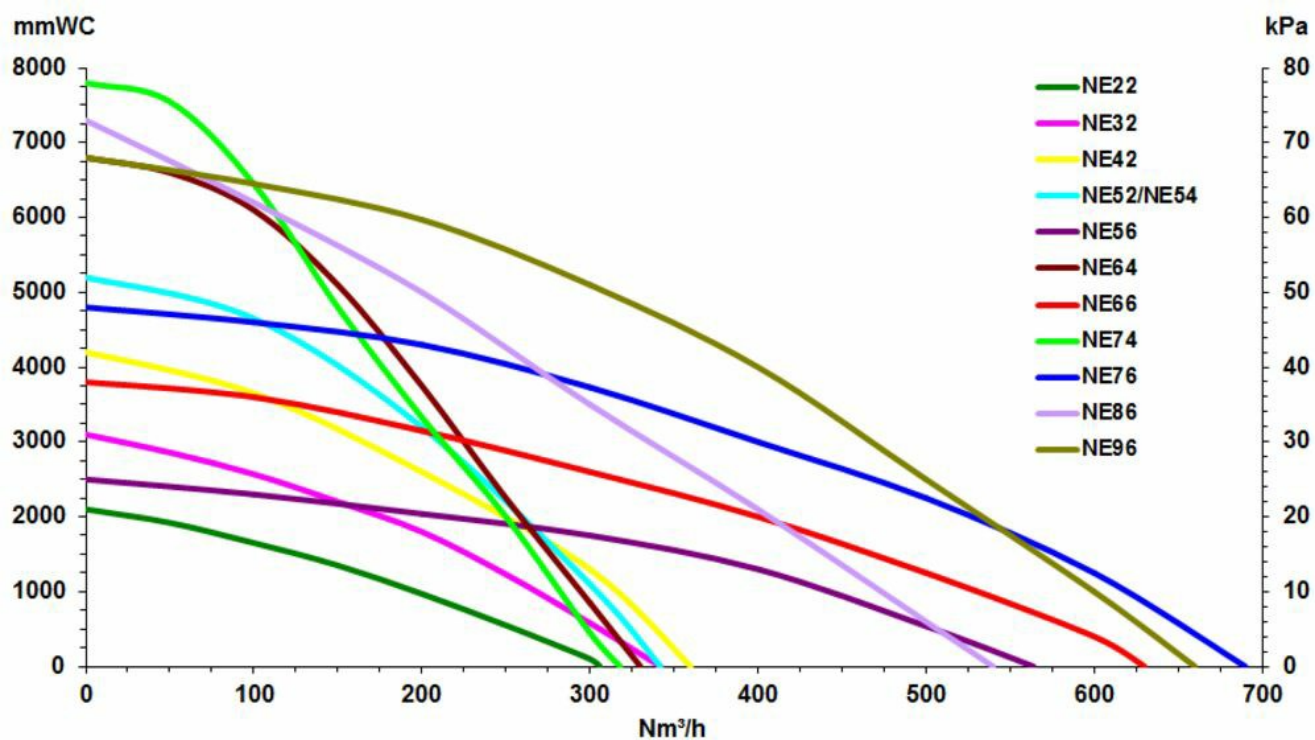

Air Powered ejectors All performance data are based on 7 bar supply pressure