

Industristøvsuger 221A



Industristøvsuger 221A

Industristøvsuger 221A

Cerifikat	CE
Type af filter	Filterpatron
Antal filter	1
Filtermateriale	Mikrofiber
Slangetype	PE/C
Trykluftbehov	3,0 Nm ³ /min
Maks. luftmængde (m ³ /h)	342
Lydniveau (dB(A))	75,3
Max vakuum (kPa)	-52
Slangelængde (m)	7,5
[ItemHVBHoseDiameter]	51

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

Modeller

	Item number
	42122106 ^[1]


^[1] Med rengøringsæt, børste, konisk og tandet mundstykke

Slangetype

Slangetype	Specifikation	Temperaturområde, °C	Slangekobling, fri ende distributionsslange	Slangekobling, fri ende tilslutningsslange	Slangtilslutning, distributionsslange	Slangekobling, tilslutningsslange
PEC	Til rengøring. Max vakuum 50 kPa. Ledningsevne < 10 ⁻⁶ Ohm	-40°C - +60°C				

This content is protected under copyright law, furnished for informational use only, and subject to change without notice. © Nederman Holding AB

	Accessory	Item number
	Styring S for NE 22-76	43220001
	Styring S for NE 22-76, uden kontrolboks	43220026
	Styring S for NE86-96, uden kontrolboks	43222008

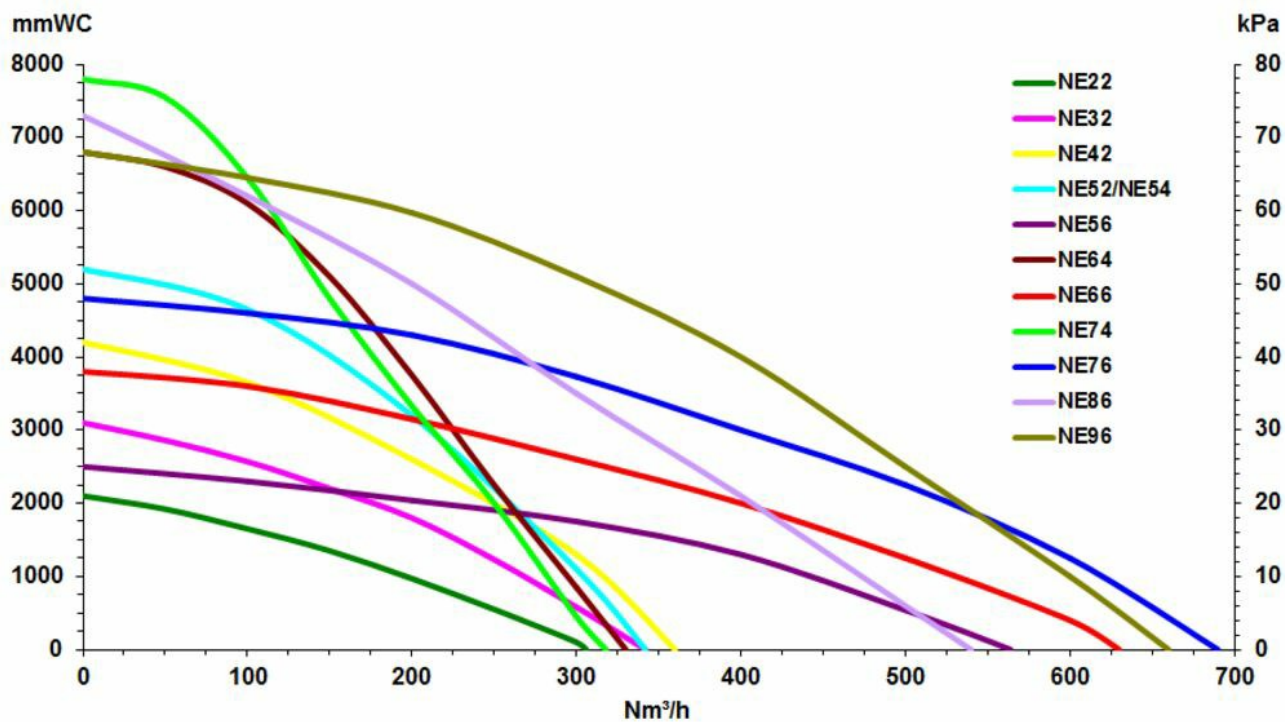

Air Powered ejectors All performance data are based on 7 bar supply pressure